

TRADITIONS® WOOD, ELITE WOOD, COMPOSITE, AND LAKE FOREST® FAUX WOOD BLINDS

Product Information Guide

Features

The Graber® Wood Story	3
Graber Wood Characteristics	3
Traditions Wood Blinds	4
Elite Wood Blinds	4
Elite Wood Blinds—Authentic Hardwoods	4
Traditions Composite Blinds	4
Lake Forest Premium Faux Wood and Faux Wood Blinds	4

Size Considerations

Cord Lift, Depth Requirements for Inside Mount	5-6
Cordless Lift, Depth Requirements for Inside Mount	7

Options

Blind Options	8
Cordless Lift	9
Motorized Tilt	9
Multiple Blinds on One Headrail	10
NoHoles™	11
Cut-Out Blinds	11
Control Lengths for Cords and Wands	11
Bay and Corner Windows	12
Cloth Tapes	13
Decorative Tassels	14
Accent Color	14
Custom Color	14
Why Elite Wood for Your Client's Home	14
How to Order Elite Wood: Special Ordering Instructions	14
Valance Options	15-16
How to Measure for Valance Returns	17
How to Measure and Order Valances	17
Valance Keystones	18
Splicing Requirements	18
How to Measure a Special Splice Location	18
Wood Specialty Shapes: Incline Wire Blinds	19
Wood Specialty Shapes: Angle Top or Bottom	20
Wood Specialty Shapes: Trapezoid, Triangle, and Octagon	21
Wood Specialty Shapes: Arched Blinds	22
Wood Specialty Shapes: Ovals and Circles	23
Making a Template for Specialty Blinds	24
Using the Graber Template Service	24

GRABER®

NOVEMBER 2019

10009-110 (11/19)|S19-19704

General Information

Slat Count Table: 1" Wood Blinds	25
Slat Count Table: 2" Wood Blinds	26
Slat Count Table: 2 $\frac{3}{8}$ " Wood Blinds	27
Slat Count Table: 2" Composite, Premium Faux Wood, and Faux Wood Blinds	28
Slat Count Table: 2 $\frac{1}{2}$ " Composite, Premium Faux Wood, and Faux Wood Blinds	29
Slat Route and Ladder Count Charts: Traditions® 1" Wood Blinds, Traditions 2" and 2 $\frac{3}{8}$ " Wood Blinds, Traditions 2" and 2 $\frac{3}{8}$ " Wood Blinds with Cordless Lift	30
Slat Route and Ladder Count Charts: 2" and 2 $\frac{3}{8}$ " Elite Wood Blinds, 2" and 2 $\frac{3}{8}$ " Elite Wood Blinds with Cordless Lift	31
Slat Route and Ladder Count Charts: Traditions 2" and 2 $\frac{1}{2}$ " Composite Blinds, Traditions 2" and 2 $\frac{1}{2}$ " Composite Blinds with Cordless Lift	32
Slat Route and Ladder Count Charts: Premium Faux Wood and Faux Wood Blinds, Lake Forest 2" and 2 $\frac{1}{2}$ " Premium Faux Wood and Faux Wood Blinds with Cordless Lift	33
Traditions 1", 2", and 2 $\frac{3}{8}$ " Wood and 2" and 2 $\frac{3}{8}$ " Elite Wood Blinds Product Detail	34
Cordless Lift Blinds Product Detail: Wood, Composite, and Faux Wood	35
Traditions 2" and 2 $\frac{1}{2}$ " Composite Blinds Product Detail	36
Lake Forest 2" and 2 $\frac{1}{2}$ " Premium Faux Wood and Faux Wood Blinds Product Detail	37

Wood Vertical Blinds

Features	38
Size Considerations	38
Depth Requirements for Inside Mount	38
Options: Cord and Chain Control	39
Paired Blinds	39
Replacement Vane Ordering	39
Stacking Chart and How to Measure for an Uncovered Window	40
Product Detail	41

Features

The Graber® Wood Story

Quality of Wood Defines a Blind's Quality

We use only 100% North American hardwood in the construction of our wood blinds because of its light weight, consistent color, hardness, structural stability, and attractive grain.

Sound Forestry Techniques

We work only with foresters who practice “sustained yield forest management”—nearly twice as much hardwood grows as is harvested in the U.S. each year. The volume of hardwoods in American forests today is greater than it was 50 years ago.

Preserving Our Natural Resources

Our Springs Window Fashions (SWF) wood products facility consumes recycled sawdust and wood shavings, generating the heat required to dry lumber for a completely self-sufficient manufacturing process. Our Reynosa, Mexico fabrication and finishing facility is 99.7% pollution free, above any U.S. standard.

SWF Wood Products, Grayling, Michigan

We have control over the quality of wood used—we control the process from green lumber to finished blinds. Hardwoods used in crafting Graber Wood Blinds are kiln dried and molded at our SWF wood products facility in Grayling, Michigan. The wood is dried slowly to strict wood blind specifications because structural change can occur when moisture is removed. Molding and sanding operations provide the highest quality surface, free of defects.

Springs Window Fashions, Reynosa, Mexico

At our state-of-the-art finishing plant in Reynosa, Mexico, components are carefully sorted prior to fabrication for color uniformity and wood characteristics. We sort wood as an end user, rather than a finishing vendor, taking out defects in a climate-controlled building. To finish the blind, we use only high quality paints and stains; on-site certified color technicians provide both application and quality control.

What Makes Graber Traditions® Blinds Different from the Rest?

- Painted and stained wood blinds are made from 100% North American hardwoods, the premier wood used in the construction of blinds
- SWF wood products and finishing facilities provide state-of-the-art technologies and processes
- Expanded choice of finishes with PureGrain™ Finish—vibrant stains that showcase the natural grain of the wood
- Unique valance choices, cloth tapes, specialty shapes, and more
- Traditions composite blinds have superior strength and moisture resistance
- The best customer service team in the industry—trained to answer any question about Graber Traditions Blinds
- Limited lifetime warranty

Graber Wood Characteristics

Wood used to manufacture Graber Wood Blinds has many natural characteristics that make it truly unique. The following are all natural characteristics of wood, and we do not consider them to be defects:


- Grain—The direction, size, and appearance of wood fibers vary greatly depending on where the wood is cut from within the tree
- Tiger Striping—Occurs when a tree develops wavy grain, due to genetics, soil content, or other natural scenarios
- Burl—Formed from an irregular growth on the outer edge of the tree
- Bird's Eye—Small area on the surface of the board where fibers are contorted to form circular figures that resemble birds' eyes
- Pin Knots—Vary in size, shape, structure, and color
- Mineral Marks—Dark or discolored areas caused by minerals which the tree extracts from the water or soil; can be either a streak or a stain, usually blackish blue
- Knotty Pine/Rustic—Material contains markings that are more extreme than in standard products; the number and degree of marking will vary throughout the blind

Please be assured that these markings in no way affect the durability or the structural integrity of the blind.


Natural variations in color and grain are inherent in the beauty of wood. These variations are within established industry guidelines and should be expected. In addition, blinds may stain slightly darker or lighter than the swatches shown in the sampling.

NOTE: Elite Walnut, Maple, and Cherry will have the unique natural variations of these beautiful hardwoods—these variations are to be expected. Blinds made from these materials will undergo a degree of color change over time, further enhancing the beauty of the wood.

Flat Grain




Grain Change




Tiger Striping




Burl/Bird's Eye




Pin Knots




Mineral Marks



Knotty Pine/
Rustic



Knotty Pine/
Rustic



Features

Traditions® Wood Blinds

- Stained and painted blinds crafted from North American hardwoods
- Finish highlights the natural characteristics of wood
- 1", 2", and 2½" slat sizes available
- Sandblast is not available on keystones
- Cordless lift option; not available on 1"
- NoHoles™ option available for maximum privacy; not available on 1" or with cordless lift
- Easy grip bottomrail for superior closure; makes lifting and lowering cordless lift blinds easier; not available on 1"
- Decorative cloth tape option; not available with 1", cordless lift or NoHoles
- Decorative tassel selection

Elite Wood Blinds

- Available in all Graber® wood paints and stains
- 2" and 2½" slat sizes available
- Sandblast finish available on any 2" paint or stain
- Custom color available; not available in unique finishes
- Cordless lift option
- NoHoles option available for maximum privacy; not available with cordless lift
- Easy grip bottomrail for superior closure; makes lifting and lowering cordless lift blinds easier
- Decorative cloth tape option; not available with cordless lift or NoHoles
- Decorative tassel selection
- Specialty shapes
- Accent valance and bottomrail: complement the window and décor of the room by specifying a different color valance and bottomrail

Elite Wood Blinds—Authentic Hardwoods

- 2" wood blinds made from premier North American hardwoods—Walnut, Maple, and Cherry with a clear coat finish that further enhances the wood's beauty
- Cordless lift option
- NoHoles option available for maximum privacy; not available with cordless lift
- Easy grip bottomrail for superior closure; makes lifting and lowering cordless lift blinds easier
- Decorative cloth tape option; not available with cordless lift or NoHoles
- Decorative tassel selection

Traditions Composite Blinds


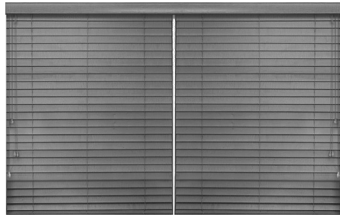
- Moisture-resistant multiple polymer composite slats
- 2" and 2½" slat sizes available
- Cordless lift option
- NoHoles option available for maximum privacy; not available with cordless lift
- Trapezoid bottomrail for superior closure
- Decorative cloth tape option; not available with cordless lift or NoHoles

Lake Forest® Premium Faux Wood and Faux Wood Blinds

- Solid or woodgrain moisture-resistant engineered polymer slats
- 2" and 2½" slat sizes available in both premium faux wood and faux wood
- Cordless lift option
- NoHoles option available for maximum privacy; not available with cordless lift
- Trapezoid bottomrail for superior closure; available on premium faux wood blinds only
- Rectangular bottomrail; available on faux wood blinds only
- Decorative cloth tape option; not available with cordless lift or NoHoles

Size Considerations

Cord Lift

Styles									
	Cord Lift Blinds				Cord Lift Blinds Multiple Blinds on One Headrail				
	Width		Height		Width			Height	
	Minimum (exact) (inches)	Maximum (inches)	Minimum (inches)	Maximum (inches)	Minimum Panel (exact) (inches)	Maximum Panel (inches)	Maximum Blind (inches)	Minimum Blind (inches)	Maximum Blind (inches)
Traditions® Wood Blinds									
Traditions 1" Wood Blinds	7	96	12	120	7	96	120	12	120
Traditions 2" Wood Blinds	7	96	12	120	7	96	120	12	120
Traditions 2" Barnwood and Distressed Wood Blinds	7	96	12	120	7	96	120	12	120
Traditions 2½" Wood Blinds	7	96	12	120	7	96	120	12	120
Exceptions: 1" blinds 7" to 8⅞" center tilt only; no lift 13⅜" minimum for same side controls									
Exceptions: 2" and 2½" blinds 7" to 11⅞" center tilt only; no lift 7" to 8⅞" not available with cloth tapes									
Elite Wood Blinds									
Elite 2" Wood Blinds	7	96	12	120	7	96	120	12	120
Elite 2" Authentic Hardwood Blinds	7	96	12	120	7	96	120	12	120
Elite 2½" Wood Blinds	7	96	12	120	7	96	120	12	120
Exceptions: 2" and 2½" blinds 7" to 11⅞" center tilt only 16⅛" minimum for same side controls 7" to 8⅞" not available with cloth tapes									
Traditions Composite Blinds									
Traditions 2" Composite Blinds	7	96	12	120	7	96	120	12	120
Traditions 2½" Composite Blinds	7	96	12	120	7	96	120	12	120
Exceptions: 2" and 2½" blinds 7" to 11⅞" center tilt only; no lift 16⅛" minimum for same side controls 7" to 8⅞" not available with cloth tapes									
Lake Forest® Premium Faux Wood and Faux Wood Blinds									
Lake Forest 2" Premium Faux Wood Blinds	7	96	12	120	7	96	120	12	120
Lake Forest 2" Faux Wood Blinds	7	96	12	120	7	96	120	12	120
Lake Forest 2½" Premium Faux Wood Blinds	7	96	12	120	7	96	120	12	120
Lake Forest 2½" Faux Wood Blinds	7	96	12	120	7	96	120	12	120
Exceptions: 2" and 2½" blinds 7" to 11⅞" center tilt only; no lift 7" to 8⅞" not available with cloth tapes Same side controls not available with any size									

Size Considerations

Cord Lift

Depth Requirements for Inside Mount



Blind Type	Headrail Dimensions (inches)	Minimum Depth Mount (inches)	Flush with Casing (without valance)*	
			Cord Tilt (inches)	Wand Tilt (inches)
Traditions® 1" Wood	1 x 1½	¾	N/A	1⅞
Traditions 2" Wood	1⅝ x 2¼	¾	2⅞	3⅞
Traditions 2⅝" Wood^	1⅝ x 2¼	¾	2⅞	3⅞
Elite Wood 2" Wood 2" Authentic Hardwood	1⅝ x 2¼	¾	2⅞	3⅞
Elite Wood 2⅝" Wood^	1⅝ x 2¼	¾	2⅞	3⅞
Traditions 2" Composite	1⅝ x 2¼	¾	2⅞	3⅞
Traditions 2½" Composite^	1⅝ x 2¼	¾	2⅞	3⅞
Lake Forest® 2" Premium Faux Wood 2" Faux Wood	1⅝ x 2¼	¾	2⅞	3⅞
Lake Forest 2⅝" Premium Faux Wood^ 2½" Faux Wood^	1⅝ x 2¼	¾	2⅞	3⅞

*For measurements of fully recessed headrails with a valance, see valance options.

^Additional clearance may be required for larger slat sizes.



Size Considerations

Cordless Lift

									
	Cordless Lift Blinds				Cordless Lift Blinds Multiple Blinds on One Headrail				
	Width		Height		Width			Height	
	Minimum (exact) (inches)	Maximum (inches)	Minimum (inches)	Maximum (inches)	Minimum Panel (exact) (inches)	Maximum Panel (inches)	Maximum Blind (inches)	Minimum Blind (inches)	Maximum Blind (inches)
Styles									
Traditions® Wood Blinds									
Traditions 2" Wood Blinds	12	84	12	86	12	84	120	12	86
Traditions 2" Barnwood and Distressed Wood Blinds	12	84	12	86	12	84	120	12	86
Traditions 2½" Wood Blinds	12	84	12	86	12	84	120	12	86
Elite Wood Blinds									
Elite 2" Wood Blinds	12	84	12	86	12	84	120	12	86
Elite 2" Authentic Hardwood Blinds**	12	84	12	78	12	84	120	12	78
Elite 2½" Wood Blinds	12	84	12	86	12	84	120	12	86
Traditions Composite Blinds									
Traditions 2" Composite Blinds	12	66	12	72	12	66	120	12	72
Traditions 2½" Composite Blinds	12	66	12	72	12	66	120	12	72
Lake Forest® Premium Faux Wood and Faux Wood Blinds									
Lake Forest 2" Premium Faux Wood Blinds	12	63	12	72	12	63	120	12	72
Lake Forest 2" Faux Wood Blinds	12	63	12	72	12	63	120	12	72
Lake Forest 2½" Premium Faux Wood Blinds	12	63	12	72	12	63	120	12	72
Lake Forest 2½" Faux Wood Blinds	12	63	12	72	12	63	120	12	72

**Walnut maximum height 68".

Depth Requirements for Inside Mount

	Headrail Dimensions (inches)	 Partially recessed headrail in window casing/ molding	 Fully recessed headrail in window casing/ molding	
			Flush with Casing (without valance)*	
			Cord Tilt (inches)	Wand Tilt (inches)
Traditions 2" and 2½" Wood Blinds	2 x 2¼	¾	2⅞	2¾
Elite 2" and 2½" Wood Blinds	2 x 2¼	¾	2⅞	2¾
Traditions 2" and 2½" Composite Blinds	2 x 2¼	¾	2⅞	2¾
Lake Forest 2" and 2½" Premium Faux Wood and Faux Wood Blinds	2 x 2¼	¾	2⅞	2¾

*For measurements of fully recessed headrails with a valance, see valance options.

Options

Blind Options (for surcharges and pricing refer to price charts)

Blind Options	Traditions® 1" Wood	Traditions 2" Wood and 2" Elite Wood	Traditions 2⅜" Wood and 2⅝" Elite Wood	Traditions 2" and 2½" Composite	Lake Forest® 2" Premium Faux Wood and 2" Faux Wood	Lake Forest 2½" Premium Faux Wood and 2½" Faux Wood	Details
Accent Color (valance/bottomrail)		●^	●^				See the accent color section
Bay and Corner Windows	●	●	●	●	●	●	See the options section for measuring and ordering information
Cloth Tapes		●\$1	●\$1	●\$1	●\$1	●\$1	See the options section
Control Locations							
• Tilt Left, Lift Right (standard)	●	●	●	●	●	●	Must be requested at time of order
• Tilt Right, Lift Left	●	●	●	●	●	●	
• All Controls Right/ All Controls Left	●	●	●	●			
Cord Tilt		●	●	●	●	●	Color coordinated
Cordless Lift		●\$	●\$	●\$	●\$	●\$	See price charts for surcharge
Custom Color		●\$^	●\$^				See price charts
Cut-Outs¹	●\$	●\$	●\$	●\$	●\$	●\$	See the options section
Decorative Tassels	●\$	●\$\$	●\$\$				See the options section
Hold Down Brackets	●	●	●	●	●	●	Must be requested at time of order
Motorized Tilt		●\$	●\$	●\$			See the motorization product information guide
Multiple Blinds on One Headrail: 2 or 3 on 1 to left of solid line*	●\$	●\$	●\$	●\$	●\$	●\$	See the options section
NoHoles™ ¹		●	●	●	●	●	No charge option
Projection Brackets							
• 2¾" and 4¾" Projection Brackets	●	●	●	●	●	●	Projection brackets not available for inside mount; must be requested at time of order; shims are standard on 2⅝" and 2½" blinds (outside mount)
• ¾" Shims	●+	●	●	●	●	●	
Ring Pull	●	●	●	●	●	●	
Ring Tilt	●	●		●^^	●		
Sky Pole¹							
• 6 foot pole	●\$	●\$	●\$	●\$	●\$	●\$	Available with ring tilt/ring pull only; must be requested at time of order
• 9 foot pole							
Wand Tilt	●	●	●	●	●	●	Color coordinated
Wood Cornices	●\$	●\$	●\$	●\$	●\$	●\$	See cornices and valances product information guide

*See solid line on appropriate price grid.

¹Not available with cordless lift option.

+¾" projection block available.

\$Option available with surcharge.

\$\$Option available with surcharge for wood; no charge for elite wood.

^Available with elite wood only.

^^Not available with 2½" composite.

Options

Cordless Lift



- **For surcharge, see price charts**
- Available on wood, composite, and faux wood blinds (not available on 1" wood)
- Cordless lift blinds offer a safer alternative for homes with children and pets
- Tilt options available: Wand tilt eliminates dangling cords and is the safest option (maximum wand length is 48"); cord tilt is also available
- Easy to use: to lower blind, pull down; to raise, simply guide the blind into the desired location by gently lifting the bottomrail
- Not available with cloth tapes, NoHoles™, cut-outs, or specialty shapes
- Legacy, craftsman, or symphony valances recommended with cordless lift blinds for better headrail coverage

	Wood	Composite	Faux Wood
Minimum Width (inches)	12	12	12
Maximum Single Blind Width (inches)	84	66	63
Maximum Multiple Blinds on One Headrail (inches)	120	120	120
Minimum Height (inches)	12	12	12
Maximum Height (inches)	86*	72	72
Maximum Square Footage (square feet)	50	29	31.5

*78" for authentic hardwood Cherry and Maple, 68" for Walnut.

Motorized Tilt



See motorization product information guide for size specifications, options, and surcharges

- Available on 2" and 2½" wood blinds and 2" and 2½" composite blinds
- Motorization will only tilt slats; raising or lowering blind is manual lift
- Blinds can be operated from virtually anywhere in the home
- Provides easy operation of hard-to-reach or large blinds
- Efficiently manages energy (heat gain and loss)
- Tilt slats on groups of multiple blinds simultaneously or individually
- Easily integrated with home automation systems
- Low voltage motorization requires no costly electrical hardwiring
- Motor located on the left side within the headrail; lift is on the right side
- Not available with multiple blinds on one headrail, specialty shapes, or hold down brackets
- Available with multiple power and control options

NOTE: Motorization components and accessories have a five-year limited warranty; excludes batteries.

Options

Multiple Blinds on One Headrail



- **Surcharge:** blinds to the left of the solid line on the price charts
- **No charge:** blinds to the right of the solid line on the price charts
- Two or more blinds can be installed on a single headrail to provide a practical treatment for larger windows or sliding patio doors
- Due to weight limitations, some blinds must be manufactured as two or three blinds on one headrail

Multiple Blinds	Control Cord Locations	Gap (inches)
Cord Lift		
Two-On-One Headrail	Left panel: Left lift only and tilt left or tilt right* Right panel: Right lift only and tilt left or tilt right*	$\frac{1}{4}$ ($\frac{1}{2}$ on NoHoles™)
Cordless Lift		
Two-On-One Headrail	Left panel (tilt left) Right panel (tilt right)	$\frac{1}{4}$
Three-On-One Headrail	Left panel (tilt left) Right panel (tilt right) Center panel (tilt left)	$\frac{1}{4}$

*2" and 2½" premium faux wood and faux wood cannot have same side controls.

NOTE: Optional control locations may be requested.

Measuring

1. Measure overall width of the area to be covered. If space permits, an overlap of 1½" per side is recommended for outside mounts.
2. Measure the width of the area each blind is to cover. Measure and specify the left blind first, continuing to the right. Allow a minimum of ¼" between blinds (½" for NoHoles) for operating clearance.
3. Total width of all blinds, plus clearance(s), must equal overall width.
4. Measure height as follows:
 - a. For windows, use standard inside or outside measuring procedures.
 - b. For patio doors, measure height within ¾" of floor, either from ceiling or a point at least 6½" above the door frame. Check slat count table to see if blind will completely clear the doorway.

Ordering


1. Indicate whether two or three blinds are to be mounted on one headrail.
2. Specify total width of headrail.
3. Indicate each panel width separately, specify left blind first, continuing to the right.
4. Specify control positions.
5. Add appropriate surcharge, if to the left of the solid line on the price chart.

Options

NoHoles™




- **No charge**
- The design of the NoHoles option eliminates route holes, providing maximum privacy and the best available light control
- Cleaning is simplified by sliding the NoHoles slats out and wiping clean, or keeping the slats in place and vacuuming using a soft brush attachment
- Not available on 1" wood, blinds with cloth tapes, cordless lift, or specialty shapes
- Best suited for inside mount applications due to the slight shifting of slats during operation

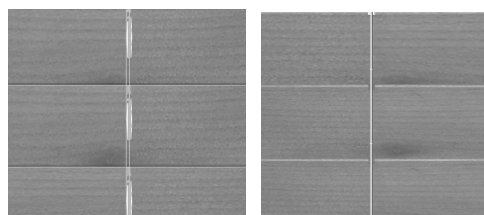

Standard


NoHoles

Cut-Out Blinds



- **For surcharge, see price charts**
- Maximum cut-out is 1" before route hole or NoHoles notch (corner and side cut-outs only)
- Cut-outs are measured with the slats tilted in the closed position for maximum clearance
- The cut-out height may be larger than requested due to slat placement
- Measure height from the bottom of the window up to the desired location
- Not available with cordless lift and wood vertical blinds

NOTE: Standard lead time does not apply for this feature. Additional manufacturing time is required.



Side Cut-Out

Control Lengths for Cords and Wands

Finished Blind Height (inches)	Wand Length* (inches)	Cord Length
up to 36	12	1/3 of blind height
36 1/16 to 60	20	
60 1/16 to 70	30	
70 1/16 to 80	40	
80 1/16 to 90	48	
90 1/16 to 100	60	
100 1/16 to 120	72	

*Wands over 48" long are a clear plastic.

NOTE: Above control lengths may not fit your control needs based on window location or operator. Special length cords and wands may be requested at the time of ordering.

Options



Bay and Corner Windows

- Made as individual blinds to fit in bay or corner windows
- Each blind is on an individual headrail and has its own control
- Indicate each blind with bypass or butt; bypass is the blind mounted into the corner; butt is the blind butted up to the other blind; must provide blind location (left and right blind)
- Control locations can be on the right or left side of each blind; placing controls opposite the corner is recommended
- Depending on the angle, some corner blinds cannot be raised to the same height

- Manufacturer will take appropriate deductions for proper fit
- No additional charge
- Valances will be mitered in the corner for finished look
- Cornices and wood verticals are not available on bay or corner windows
- Slat alignment cannot be guaranteed on side by side blinds
- If you do not want manufacturer to take deductions DO NOT order as bay or corner

NOTE: Standard lead time does not apply for this feature. Additional manufacturing time is required.


Measuring Information

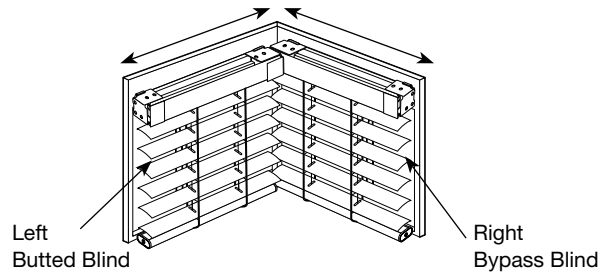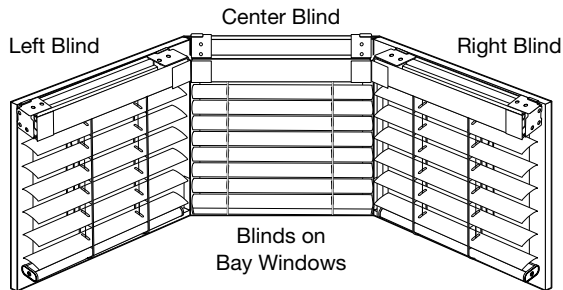

Corner Window

Measure:

Width of each window from corner to the point you would like to cover.

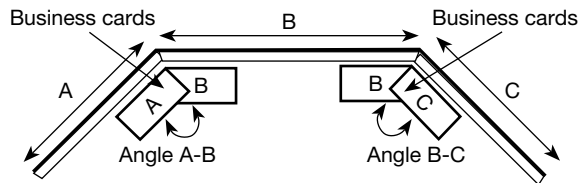

Three-Sided Bay Window

Measure:

A and C: Width of side windows from the corners to the point you would like the blind to cover.

B: Width of the center window from corner to corner.

Angle A-B: Angle between windows (A) and (B).

Angle B-C: Angle between windows (B) and (C).

Four-Sided Bay Window

Measure:



A and D: Width of side windows from the corners to the point you would like the blind to cover.

B and C: Width of each window from corner to corner.

Angle A-B: Angle between windows (A) and (B).

Angle B-C: Angle between windows (B) and (C).

Angle C-D: Angle between windows (C) and (D).

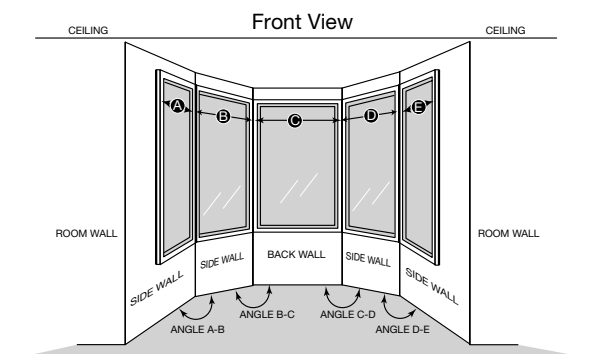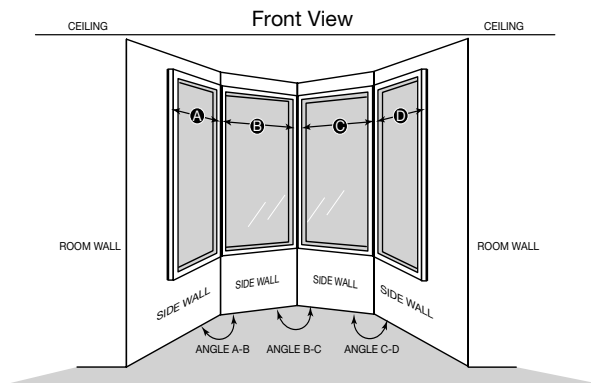

Five-Sided Bay Window

Measure:

A and E: Width of side windows from the corners to the point you would like the blind to cover.

B, C, and D: Width of each center window from corner to corner.

Angle A-B: Angle between windows (A) and (B).

Angle B-C: Angle between windows (B) and (C).


Angle C-D: Angle between windows (C) and (D).

Angle D-E: Angle between windows (D) and (E).

NOTE: Measure bay angle using protractor or angle finder, or use two business cards in bay corner as illustrated above, trace onto paper and fax to customer service.

Options

Cloth Tapes

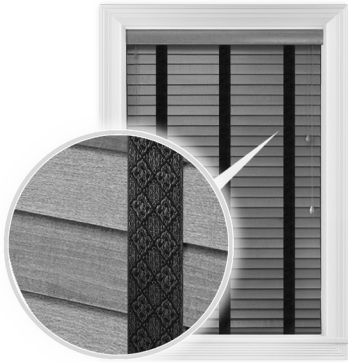

- For surcharge, see price charts
- Decorative option to add to wood, composite, or faux wood blinds
- Decorative tapes will have pattern visible to room side only
- Not available with 1" wood, cordless lift, NoHoles™ option, or specialty shapes
- See chart below for availability of colors

Color Name	Color Number	Backer Tape Color	Traditions® 2" Wood Elite 2" Wood Traditions 2" Composite Lake Forest® 2" Premium Faux Wood Lake Forest 2" Faux Wood	Traditions® 2 3/8" Wood Elite 2 3/8" Wood Traditions 2 1/2" Composite Lake Forest® 2 1/2" Premium Faux Wood Lake Forest 2 1/2" Faux Wood
1" Solid Tapes			Cloth Tapes (available as marked)	
Beige	1011		•	
Black	1033		•	
Cocoa	1297		•	
Duck White	1136		•	
Toffee	1296		•	
White Smoke	1617		•	
1 1/2" Solid Tapes				
Aztec Amber	2177		•	•
Beige	2011		•	•
Black	2033		•	•
Chocolate	2353		•	•
Cocoa	2297		•	•
Dark Grey	2857		•	•
Duck White	2136		•	•
Golden Honey	2176		•	•
Light Grey	2861		•	•
Moss	2500		•	•
Navy	2369		•	•
Shadow Grey	2178		•	•
Taupe	2659		•	•
Toffee	2296		•	•
White	2005		•	•
White Smoke	2617		•	•
1 1/2" Decorative Tapes				
Arctic Sky	S164	Duck White	•	
Belgian Cream	Q164	Duck White	•	
Coastal Fog	C159	Duck White	•	
Creamy Taupe	D147	Duck White	•	
Dew Alabaster	N112	Duck White	•	
Fairweather Blue	D155	Duck White	•	
Fresh Sage	B160	Duck White	•	
Medallion Flax	F541	Light Beige	•	
Medallion Taupe	F659	Taupe	•	
Medallion Toffee	F296	Black	•	
Modern Taupe	C157	Duck White	•	
Natural Linen	S166	Taupe	•	
Neutral Intrigue	B161	Duck White	•	
Palm Beach	P179	White Smoke	•	
Variegated Taupe	Q659	Taupe	•	

Options

Decorative Tassels (wood blinds only)



Standard Tassel

1" wood tassel stained or painted to coordinate with your wood blinds.



Brass Tassel

1" antique brass tassel ideal for medium and dark stains and paints.

No charge for elite blinds.



Nickel Tassel

1" nickel tassel ideal for light stains and paints.

No charge for elite blinds.



Carved Tassel

1" carved wood tassel stained or painted to coordinate with your wood blinds.

No charge for elite blinds (not available on authentic hardwoods).



Flared Tassel

2¼" long, genuine hardwood tassel stained or painted to coordinate with your wood blinds.

No charge for elite blinds (not available on authentic hardwoods).



Ovate Tassel

2¼" long, genuine hardwood tassel stained or painted to coordinate with your wood blinds.

No charge for elite blinds (not available on authentic hardwoods).

NOTE: For surcharges see price charts.

Accent Color (elite wood blinds only)

For surcharge, see price charts.

Complement the window and décor of the room by specifying a different color valance and bottomrail. Single color only.

Custom Color

For surcharge, see price charts.

Graber® offers the unique option of custom color either paint or stain. Use the following guidelines when placing your order:

1. Complete the custom color match request form. Forms can be found on graberdirect.com.
2. Supply Springs Window Fashions with a color sample labeled with the color name and purchase order number. The sample needs to be at least 2" x 2". For best results, submit a 3" x 3" color sample.
3. Send the order, along with the request form and color sample to: Springs Window Fashions, LLC
ATTN: Graber Custom Color
1500 Sycamore Road-G5
Montoursville, PA 17754
4. Approval of the custom color sample is required on orders of six or more blinds. A sample of the custom color will be sent upon request for orders of less than six blinds. If a custom color sample is not requested, the sample provided will be used to manufacture the wood blinds. If the color sample is to be returned, please note this on your order.
5. Custom color samples will be sent for approval approximately two weeks after receiving the original color sample.
6. Once approval is received, fabrication of the custom color blinds will begin.

Why Elite Wood for Your Client's Home

Elite wood blinds are individually hand finished using a wiping technique to enhance the beauty of the wood and create a truly beautiful blind as unique as your client.

Additional benefits of elite wood blinds include:

- Each wood component is finished after being cut and routed for the client's individual blind—creating wood components that are completely sealed from the environment
- Elite wood finish is applied using a wiping process rather than flow coating the finish; the end result is a finish that further enhances the beautiful characteristics of the wood
- All Graber Traditions® paints and stains are available using this unique finishing style, or create a completely customized blind using the custom color option

How to Order Elite Wood: Special Ordering Instructions




On graberdirect.com

- Select the description elite wood
- Select the finish choice
 - Elite finish
 - Elite high gloss
 - Sandblast finish (2" only)
- Follow the remaining ordering instructions to complete the order

NOTE: Due to the nature of the elite process, blinds and specialty shapes require an extended lead time. Lead times vary depending on blind sizes and quantities.

Options

Valance Options

Valance Type	Blind Type	Maximum Continuous Width*		Control Type	Standard Valance Returns (inches)	Full Recess Depth (inches)
		Inside Mount No Returns (inches)	Inside Mount with Returns (inches)			
2½" Classic Valance  Valance Returns ½" to 1": glued 1⅛" to 4⅞": optional glued 4⅞" and greater: not glued	2" Barnwood^	100¼	98¾	Cord tilt	2⅞	3¼
				Wand tilt	3⅞	3⅞
				Cordless wand tilt	3⅞	3¾
				Cordless cord tilt	2¾	3⅞
3" Classic Valance  Valance Returns ½" to 1": glued 1⅛" to 4⅞": optional glued 4⅞" and greater: not glued	1" Wood	100¼	98¾	Wand tilt	2⅞	2¾
	2" Wood 2" Elite Wood	100¼	98¾	Cord tilt	2⅞	3¼
				Wand tilt	3⅞	3⅞
				Cordless wand tilt	3⅞	3¾
				Cordless cord tilt	2¾	3⅞
	2½" Wood 2½" Elite Wood	100¼	98¾	Cord tilt	3¼	4⅞
				Wand tilt	3¼	4⅞
				Cordless wand tilt	3⅞	3⅞
				Cordless cord tilt	3⅞	3⅞
	Wood Verticals	100¼	98¾	N/A	5½	5⅞
	2" Composite^	106⅞	105¾	Cord tilt	2⅞	3¼
				Wand tilt	3⅞	3⅞
				Cordless wand tilt	3⅞	3¾
				Cordless cord tilt	2¾	3⅞
	2½" Composite^	106⅞	105¾	Cord tilt	3⅞	4¼
				Wand tilt	3⅞	4¼
				Cordless wand tilt	3¼	4⅞
				Cordless cord tilt	3¼	4⅞
	2" Premium Faux Wood^ 2" Faux Wood^	106⅞	105¾	Cord tilt	2⅞	3¼
				Wand tilt	3⅞	3⅞
				Cordless wand tilt	3⅞	3¾
				Cordless cord tilt	2¾	3⅞
	2½" Premium Faux Wood^ 2½" Faux Wood^	106⅞	105¾	Cord tilt	3⅞	4¼
				Wand tilt	3⅞	4¼
				Cordless wand tilt	3¼	4⅞
				Cordless cord tilt	3¼	4⅞
3" Majestic Valance  Valance Returns ½" to 1": glued 1⅛" to 4⅞": optional glued 4⅞" and greater: not glued	2" Composite^	106⅞	105¾	Cord tilt	2⅞	3⅞
				Wand tilt	3⅞	4⅞
				Cordless wand tilt	3⅞	3⅞
				Cordless cord tilt	2¾	3⅞
	2½" Composite^	106⅞	105¾	Cord tilt	3⅞	4⅞
				Wand tilt	3⅞	4⅞
				Cordless wand tilt	3¼	4¼
				Cordless cord tilt	3¼	4¼
	2" Premium Faux Wood^ 2" Faux Wood^	106⅞	105¾	Cord tilt	2⅞	3⅞
				Wand tilt	3⅞	4⅞
				Cordless wand tilt	3⅞	3⅞
				Cordless cord tilt	2¾	3⅞
	2½" Premium Faux Wood^ 2½" Faux Wood^	106⅞	105¾	Cord tilt	3⅞	4⅞
				Wand tilt	3⅞	4⅞
				Cordless wand tilt	3¼	4¼
				Cordless cord tilt	3¼	4¼





*Continuous valances wider than sizes shown above will have two or more sections spliced together with a keystone. Maximum width for spliced valances is 300¾".

^Keystones not available.

NOTE: For replacement valances see cornices and valances product information guide.

Options

Valance Options

Valance Type	Blind Type	Maximum Continuous Width*		Control Type	Standard Valance Returns (inches)	Full Recess Depth (inches)
		Inside Mount No Returns (inches)	Inside Mount with Returns (inches)			
3½" Craftsman Valance  Valance Returns ½" to 1": glued 1⅛" to 4⅞": optional glued 4⅞" and greater: not glued	1" Wood	100¼	98⅝	Wand tilt	2⅛	2⅝
	2" Wood 2" Elite Wood	100¼	98⅝	Cord tilt Wand tilt Cordless wand tilt Cordless cord tilt	2⅞ 3⅞ 3⅞ 2¾	3¼ 3⅞ 3¼ 3⅞
	2⅝" Wood 2⅝" Elite Wood	100¼	98⅝	Cord tilt Wand tilt Cordless wand tilt Cordless cord tilt	3¼ 3¼ 3⅞ 3⅞	4⅞ 4⅞ 3⅞ 3⅞
	Wood Verticals	100¼	98⅝	N/A	5½	5⅞
3½" Legacy Valance  Valance Returns ½" to 1": glued 1⅛" to 4⅞": optional glued 4⅞" and greater: not glued	1" Wood	100¼	98⅝	Wand tilt	2⅛	2⅞
	2" Wood 2" Elite Wood	100¼	98⅝	Cord tilt Wand tilt Cordless wand tilt Cordless cord tilt	2⅞ 3⅞ 3⅞ 2¾	3⅞ 4 3⅞ 3⅞
	2" Distressed Wood^ 2" Elite Authentic Hardwood^	100¼	98⅝	Cord tilt Wand tilt Cordless wand tilt Cordless cord tilt	2⅞ 3⅞ 3⅞ 2¾	3⅞ 4 3⅞ 3⅞
	2⅝" Wood 2⅝" Elite Wood	100¼	98⅝	Cord tilt Wand tilt Cordless wand tilt Cordless cord tilt	3¼ 3¼ 3⅞ 3⅞	4⅞ 4⅞ 4⅞ 4⅞
	Wood Verticals	100¼	98⅝	N/A	5½	5⅞
4½" Symphony Valance  Valance Returns ½" to 1": glued 1⅛" to 4⅞": optional glued 4⅞" and greater: not glued	1" Wood	100¼	98⅝	Wand tilt	2⅛	2⅞
	2" Wood 2" Elite Wood	100¼	98⅝	Cord tilt Wand tilt Cordless wand tilt Cordless cord tilt	2⅞ 3⅞ 3⅞ 2¾	3⅞ 4⅞ 4⅞ 3⅞
	2⅝" Wood 2⅝" Elite Wood	100¼	98⅝	Cord tilt Wand tilt Cordless wand tilt Cordless cord tilt	3¼ 3¼ 3⅞ 3⅞	4⅞ 4⅞ 4⅞ 4⅞
	Wood Verticals	100¼	98⅝	N/A	5½	6¼
5" Flat Valance 	2" Wood Specialty Shapes	N/A	N/A	Wand tilt Cord tilt	N/A N/A	3⅞ 3⅞
	2⅝" Wood Specialty Shapes	N/A	N/A	Wand tilt Cord tilt	N/A N/A	3⅞ 3⅞

*Continuous valances wider than sizes shown above will have two or more sections spliced together with a keystone. Maximum width for spliced valances is 300¾".

^Keystones not available.

NOTE: For replacement valances see cornices and valances product information guide.

Options

How to Measure for Valance Returns

Window depths vary considerably depending on the age and style of the window. **Always** measure the window depth, regardless of the type of window treatment the client is considering. Knowing the depth when the order is placed can help prevent costly errors.


Please use our valance return cards to assist in correctly calculating valance return sizes.

To calculate the return width, use this formula:

(standard return width) minus (client window depth) = special return width to order for inside mount blind

REMEMBER:

- Smallest return width is $\frac{1}{2}$ " (inside measurement), maximum return width is 8"
- Returns up to 1" (inside measurement) will be glued; $1\frac{1}{16}$ " to $4\frac{5}{16}$ " optional glued
- The width of a return and the width of a valance are measured on the inside (back side) of the valance, not the outside (face) of the valance (see diagram at right)
- Standard return size for $2\frac{3}{16}$ " blinds—subtract $\frac{3}{16}$ " prior to determining special return width
- Standard return size for $2\frac{1}{2}$ " blinds—subtract $\frac{3}{8}$ " prior to determining special return width



A: Inside Measurement
B: Outside Measurement



How to Measure and Order Valances

If a valance is ordered, it is supplied in one of the following styles, depending on how your blind will be mounted. For a more custom look, the valance and returns may be special ordered to your measurements.


NOTE: Valances with returns are measured and cut from the **INSIDE** of the miter to ensure the most accurate fit when installed over the headrail or window frame.

Blinds ordered as an OUTSIDE MOUNT

with requested returns will be supplied with returns sized to cover the end of the blind back to the mounting surface. If projection brackets are requested when the blind is ordered, longer returns will be sent automatically. Outside mount blinds are available without returns upon request.

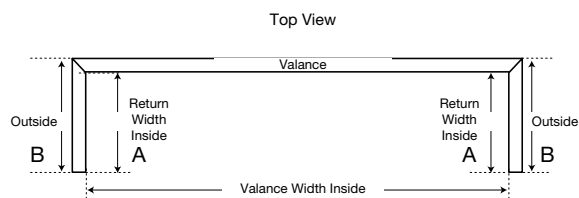

A: Inside Measurement
B: Outside Measurement

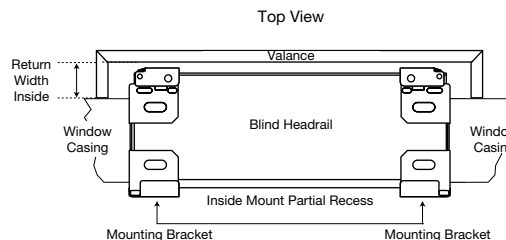

NOTE: Minimum return width is $\frac{1}{2}$ ", maximum return width is 8".


Additional Ordering Information:

- Please state at the time of order if the valance and return measurements are for the **EXACT** size required so that no additions or deductions are made
- Different return sizes can be ordered for the same valance; always provide **LEFT** return **INSIDE** measurement first when ordering
- Valance projection is different if the blind has a wand tilt or cord tilt; please refer to the previous specifications chart for more information
- Returns up to 1" will be glued; $1\frac{1}{16}$ " to $4\frac{5}{16}$ " optional glued; $4\frac{11}{16}$ " and greater will not be glued
- Bay and corner blinds—must specify return width on inside mount at time of order
- Single side returns are available—opposite end will be cut straight

Options

Valance Keystone

- Decorative keystones are required on wood valances that require splicing
- Keystones will be equally spaced unless special splice locations are requested at time of order
- Optional keystones can be ordered with single piece valances, or in addition to required keystones at the time of order only
 - Minimum width with a keystone: 12"
 - Maximum number of keystones: 3
- Keystones will be stained or painted to match the valance ordered as standard; optional different color selection available
- Keystones not available on elite authentic hardwood, distressed wood, barnwood, in sandblast finish, composite, or faux wood valances
- Keystones cannot be ordered for existing valances, attachment will not work
- All inside mount applications will have a slight light gap at the top of valance when installed

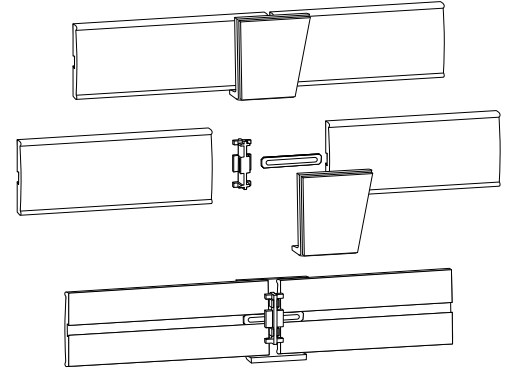


Splicing Requirements

Profile	Number of Sections	Number of Keystones	No Returns		With Returns (inside dimensions)	
			Minimum (inches)	Maximum (inches)	Minimum (inches)	Maximum (inches)
2½" Classic Barnwood Valance*	1	0	8	100¼	8	98⅞
3" Classic Wood Valance	2	1	100⅞	200½	98⅞	198⅞
3½" Craftsman Wood Valance						
3½" Legacy Wood Valance	3	2	200⅞	300¼	198⅞	298⅞
4½" Symphony Wood Valance						

*Keystones not available.


Outside Mount

- Wood valances requiring a splice will include a keystone (see chart above for details)

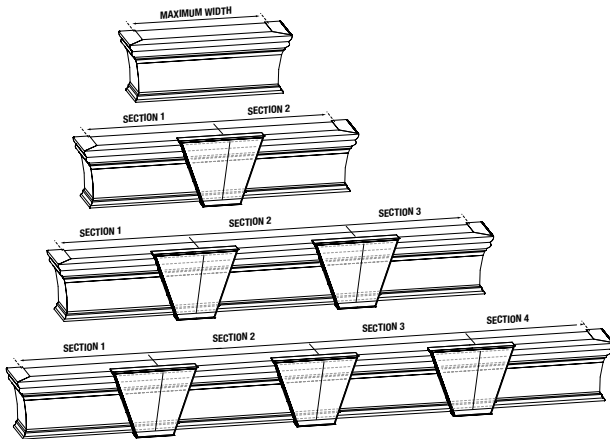


Inside Mount

- Wood valances 100¼" or wider will require a keystone

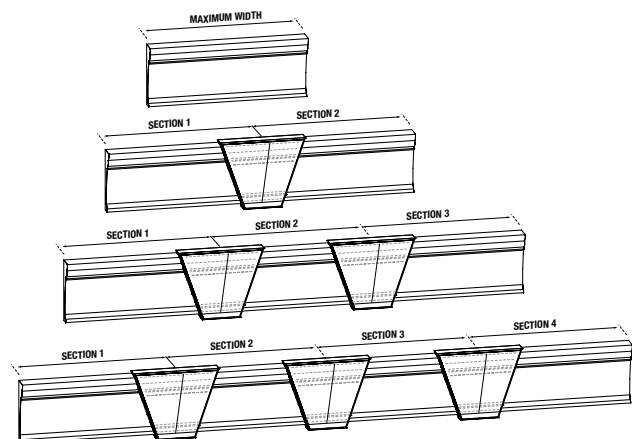

How to Measure a Special Splice Location

A keystone is supplied for valance widths that require a splice. Keystones will be equally spaced unless a special splice location is requested at time of order. The placement of the splice will be calculated by the factory using an **INSIDE** measurement from the mitered corner to the location specified on the order.

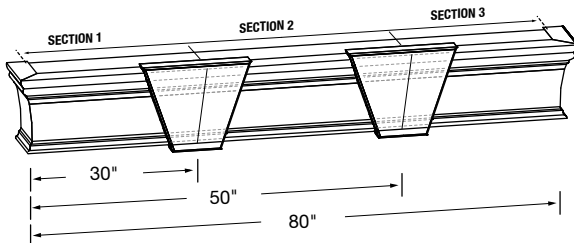

Each splice location should be recorded starting from the **LEFT BACKSIDE** corner.

These formulas are used to calculate BACKSIDE valance measurements.

Inside Mount with No Returns	Ordered width - ⅛"
Inside Mount with Returns	Ordered width + ¼"
Outside Mount with No Returns	Ordered width + ½"
Outside Mount with Returns	Ordered width + ¾"


Example: Overall valance width = 80" backside measurement
 First splice from left = 30" backside measurement
 Second splice from left = 50" backside measurement

For surcharge, see price charts.

NOTE: All measurements need to be from BACKSIDE.

Options

Wood Specialty Shapes: Incline Wire Blinds

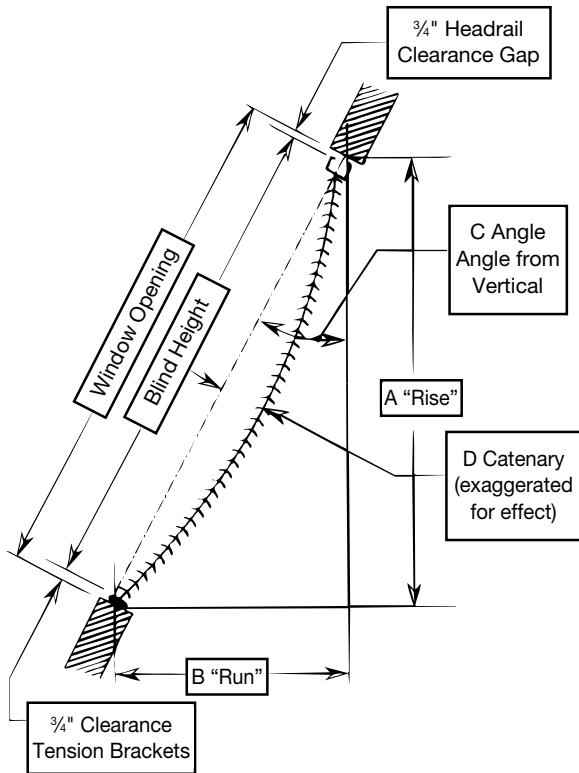

NOTE: Maximum degree from vertical is 45°.
Blinds over 30° will have marginal tilt.
Blinds over 40° will have marginal lowering.

- Blinds up to 60" will have 2 wires
- Blinds over 60" will have 4 wires

Options Available:

- Decorative tassels
- Ring tilt (2" only)
- Custom color
- High gloss finish
- Accent color

NOTE: Due to the nature of the elite process, specialty shapes require an extended lead time. Lead times vary depending on blind sizes and quantities.

Features

- For pricing, see price charts
- Cord, wand, and ring tilt options available
- Wand control is the universal joint attachment
- There is a turn buckle in the headrail for adjusting the tension in the wires
- At the bottomrail, there are sill plates that are used to attach the wires to the sill
- Color coordinated box style bracket

Incline (tension) Wire Blinds

- Rectangular blinds will tilt only; may be used in windows installed vertically to 45 degrees from vertically (maximum)
- Ideal for applications that require stabilized blinds, such as boats

- A. Rise—The vertical measurement from the top of a window to the RUN to form a 90 degree angle.
- B. Run—The horizontal measurement from the bottom of a window to the RISE to form a 90 degree angle.
- C. Angle—The degree the window is slanted perpendicular (at a right angle) to the floor.
- D. Catenary—The degree a blind may possibly bow. No measurement needed. Must give measurements for width and height. A and B are used to calculate the angle (must be less than 45°).

Measuring Information

Use regular measuring instructions; see measuring instructions tab.
Available on elite wood blinds.

Size Considerations	Incline Wire (inches)	
Minimum Width	16	
Maximum Width	96	
Minimum Height	12	
Size Considerations	Blind Width (inches)	Maximum Height (inches)
Maximum Height	16 to 32	120
	32 1/4 to 57	108
	57 1/2 to 92	102
	92 1/2 to 96	90

Depth Requirements	2" (inches)	2 3/8" (inches)
Minimum	3/4	3/4
Flush with Casing	2 3/8	2 3/8

NOTE: Not available with cloth tapes, cordless lift, cut-outs, multiple blinds on one headrail, NoHoles™, or valances.
Slat alignment cannot be guaranteed on side by side blinds.

Options

Wood Specialty Shapes: Angle Top or Bottom

Features

- For pricing, see price charts
- Available in 2" and 2 3/8" slats
- Extruded aluminum headrail
 - 2 1/4" depth x 2" height

Controls

- Cord, ring, and wand tilt options available
- Standard wood wand lengths are 12", 20", 30", 40", and 48"
- Polycarbonate wands available in lengths over 48"
- Universal joint attachments for wand control
- Wand and cord tilt controls will be approximately one third the length of the blind; controls on angle top or angle bottom blinds will be located on the short side of the blind
- Due to the angle of the headrail, blinds may not operate as smoothly as a standard blind
- Maximum angle is 45°
- Blinds have tilt function only

- Lightblocking headrail is not available
- See below for measuring guidelines
- Not available with cloth tapes, cordless lift, cut-outs, motorized tilt, NoHoles™, or unique finishes

Size Considerations	2" (inches)	2 3/8" (inches)
Minimum Width	15	15
Minimum Height*	12	12
Maximum Width	96	96
Maximum Height	120	120

*Long side.


Depth Requirements	2" (inches)	2 3/8" (inches)
Minimum	3/4	3/4
Flush with Casing	3 5/8	3 5/8

Mounting Options

- Blinds under 24" must use hold down brackets to ensure level installation

NOTE: Due to the nature of the elite process, specialty shapes require an extended lead time. Lead times vary depending on blind sizes and quantities.


Valance



5" Flat Valance

- Valance returns are not available

Angle Top or Bottom: Measuring Guidelines

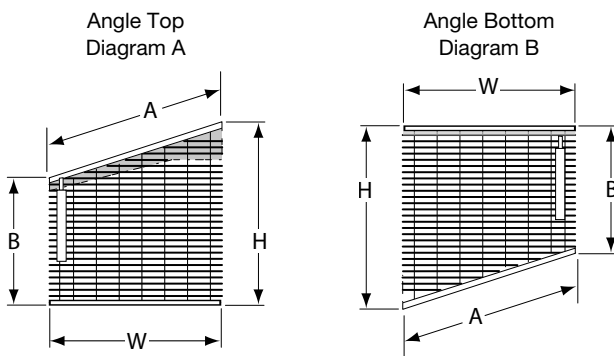

Refer to diagrams for illustrations of measurements to include when ordering an angle top or angle bottom blind.

W: Straight width
B: Length of short side
H: Length of long side
A: Angle width

Also specify/include:

- Inside or outside mount

Options

Wood Specialty Shapes: Trapezoid, Triangle, and Octagon

Features

- For pricing, see price charts
- Available in 2" and 2½" slats
- Extruded aluminum headrail
 - 2¼" depth x 2" height

Controls

- Cord, ring, and wand tilt options available
- Standard wood wand lengths are 12", 20", 30", 40", and 48"
- Polycarbonate wands available in lengths over 48"
- Universal joint attachments for wand control
- Wand and cord tilt controls will be approximately one third the length of the blind
- Due to the angle of the headrail, blinds may not operate as smoothly as a standard blind
- Blinds have tilt function only

- Lightblocking headrail is not available
- See below for measuring guidelines
- Not available with cloth tapes, cordless lift, cut-outs, motorized tilt, NoHoles™, or unique finishes

Size Considerations	2" (inches)	2½" (inches)
Minimum Width**	15	15
Minimum Height	12	12
Maximum Width	96	96
Maximum Height	120	120

**Octagon and trapezoid: 7½" exact minimum for top headrail.

Depth Requirements	2" (inches)	2½" (inches)
Minimum	2¼	2⅝
Flush with Casing	3⅝	3⅝

Mounting Options

- All shapes receive predrilled openings and fasteners for direct mounting
 - Inside mounts: predrilled openings are located on the underside of the headrail
 - Outside mounts: predrilled openings are located on the front and back face of the headrail

NOTE: Due to the nature of the elite process, specialty shapes require an extended lead time. Lead times vary depending on blind sizes and quantities.


Valance



5" Flat Valance

- Valance returns are not available

Trapezoid, Triangle, or Octagon: Measuring Guidelines

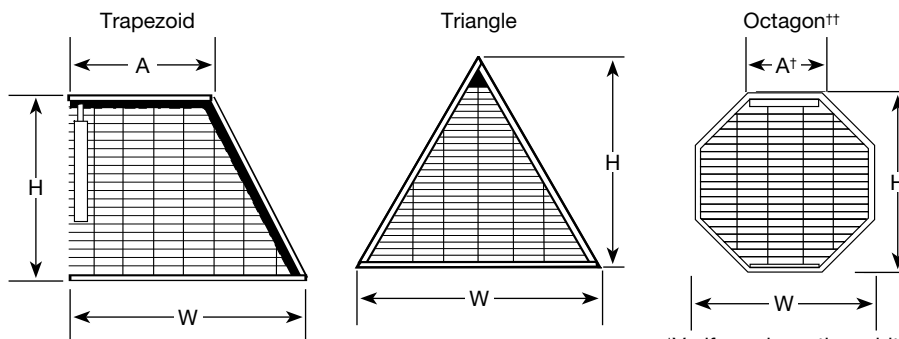

†Verify each section width.

††Depending on sizes, octagon may be framed on all sides. Contact customer service.

Refer to diagrams for illustrations of measurements to include when ordering a trapezoid, triangle, or octagon blind.

W: Bottom width

H: Length of long side

A: Top width

Also specify/include:

- Inside or outside mount
- Control location

Options

Wood Specialty Shapes: Arched Blinds

Features

- For pricing, see price charts
- Available in 2" and 2 3/8" slats
- Extruded aluminum headrail
 - 2 1/4" depth x 2" height

Controls

- Cord, ring, and wand tilt options available
- Standard wood wand lengths are 12", 20", 30", 40", and 48"
- Polycarbonate wands available in lengths over 48"
- Arched blinds will fully tilt but will not lift
- Universal joint attachments for wand control
- Wand and cord tilt controls will be approximately one third the length of the blind; controls on arched blinds will be located on the low side of the quarter arch
- Due to the angle of the headrail, blinds may not operate as smoothly as a standard blind
- Blinds have tilt function only

- Lightblocking headrail is not available
- See below for measuring guidelines
- Not available with cloth tapes, cordless lift, cut-outs, motorized tilt, NoHoles™, or unique finishes

	2" (inches)	2 3/8" (inches)
Minimum Arch Width: Full Arch	24	24
Minimum Arch Width: Quarter Arch	15	15
Minimum Arch Height: Full Arch	12	12
Minimum Arch Height: Quarter Arch	12	12
Maximum Arch Width	96	96
Maximum Height of Extended Arches, Quarter Arches	120	120


Depth Requirements	2" (inches)	2 3/8" (inches)
Minimum	2 1/4	2 3/8
Flush with Casing	3 1/8	3 3/8

Mounting Options

- We recommend hold down brackets for quarter arches less than 24" in width to ensure level installation
- Arches will receive predrilled openings and fasteners
 - Inside mounts: predrilled openings are located on the underside of the headrail
 - Outside mounts: predrilled openings are located on the front and back face of the headrail

NOTE: Due to the nature of the elite process, specialty shapes require an extended lead time. Lead times vary depending on blind sizes and quantities.


Valance



5" Flat Valance

- Valance returns are not available

Arched Blinds: Measuring Guidelines

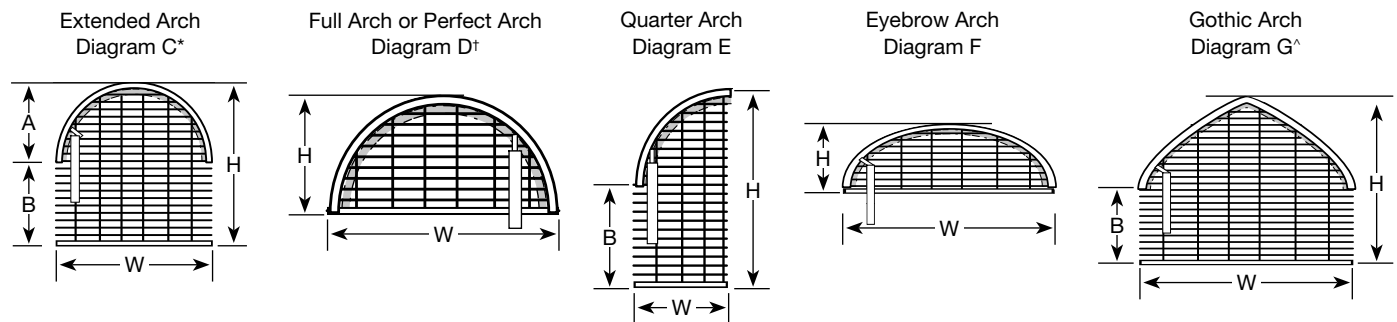

Refer to diagrams for illustrations of measurements to include when ordering an arched blind.

W: Straight width

B*: Length to springline (point where arch begins)

Template needs to extend 6" past the springline.

H*: Overall height

A: Arch height

Also specify/include:

- Inside or outside mount
- Control location

*A + B = H

†Perfect arch: height = 1/2 of width;

Perfect 1/4" = width and height are the same

^Customer must provide template

Options

Wood Specialty Shapes: Ovals and Circles

Features

- For pricing, see price charts
- Available in 2" and 2½" slats
- Extruded aluminum headrail
 - 2¼" depth x 2" height

Controls

- Cord, ring, and wand tilt options available
- Standard wood wand lengths are 12", 20", 30", 40", and 48"
- Polycarbonate wands available in lengths over 48"
- Universal joint attachments for wand control
- Wand and cord tilt controls will be approximately one third the length of the blind
- Blinds have tilt function only

- Lightblocking headrail is not available
- See below for measuring guidelines
- Not available with cloth tapes, cordless lift, cut-outs, motorized tilt, NoHoles™, or unique finishes

Size Considerations	2" (inches)	2½" (inches)
Minimum Diameter Width or Height	24	24
Maximum Diameter Width or Height	72	72

Depth Requirements	2" (inches)	2½" (inches)
Minimum	2¼	2⅝
Flush with Casing	3⅞	3⅞


Mounting Options

- All shapes receive predrilled openings and fasteners for direct mounting
 - Inside mounts: predrilled openings are located on the underside of the headrail
 - Outside mounts: predrilled openings are located on the front and back face of the headrail

NOTES:

1. For blinds less than 16 square feet, valance may appear disproportionate in scale.
2. Due to the nature of the elite process, specialty shapes require an extended lead time. Lead times vary depending on blind sizes and quantities.

Valance




5" Flat Valance

- Valance returns are not available

NOTES:

1. Maximum spacing between ladders is 24".
2. Standard control positions: lift right/tilt left.
3. Maximum slat width is 96". Wider blinds must be multiple blinds on one headrail.
4. 7" to 8⅝" not available with cloth tapes.
5. Cloth tape ladder quantity is the same as number of ladders listed above.

Circles and Ovals: Measuring Guidelines

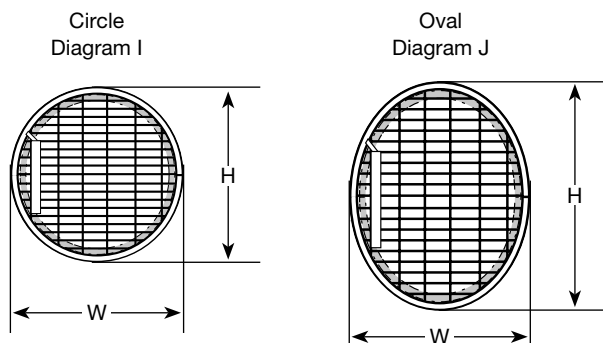

Refer to diagrams for illustrations of measurements to include when ordering a circle or oval blind.

W and H: Provide width and height.

Template required if width and height are not the same.

Also specify/include:

- Inside or outside mount
- Control location

Options


Making a Template for Specialty Blinds

1. Tape butcher paper, kraft, or construction paper over the window opening allowing plenty of overlap.
2. Being careful not to press against the template paper while tracing, draw an exact outline of the window opening. Pressing on the template paper may distort the paper and cause the wrong size to be made.
3. Remove the paper from the window opening. If the shade is an outside mount, add the desired amount of overlap to the window outline and draw a second outline around it to match the shape of the finished shade. Be sure to erase the inside line.
4. Mark the dimensions on the template. Check that the template dimensions match your measurements of the actual window opening.

NOTE: Make sure the template is of the window opening, not the glass only measurement.

5. Cut the shape from the paper.
6. PLACE THE TEMPLATE BACK INTO THE WINDOW OPENING TO CHECK FOR PROPER FIT COMPLETELY AROUND.
7. Indicate on the template
 - "Room side" and "top" on the template
 - Purchase order number
 - Customer's name
 - Your store name and account number
8. Roll up template and place in a mailing tube. DO NOT FOLD TEMPLATE.

NOTE: Template of arch top plus 6" beyond springline (point where arch begins). Required for elongated arch.

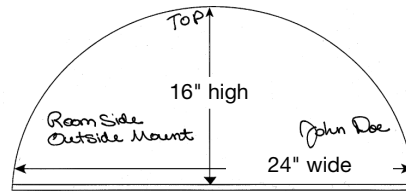

NOTE: This is just a sample for illustration purposes only—other information may be needed for your order.

Mail to: Springs Window Fashions, LLC
1500 Sycamore Road-G5
Montoursville, PA 17754
ATTN: Specialty Dept.

NOTE: When mailing, make sure to get a tracking number and note your return address on the mailing tube.

ACCEPTABLE MATERIALS FOR MAKING TEMPLATES:

- Kraft paper
- Butcher paper
- Construction paper

WE WILL NOT ACCEPT TEMPLATES MADE FROM THE FOLLOWING MATERIALS:

- Newspaper
- Plastic
- Wax paper
- Fabric
- Tissue paper
- Roofing paper
- Existing arch shades
- Wrapping paper
- Cardboard
- Poster board

NOTE: If the material used to make a template stretches, tears easily, will not lay flat, or will mark the fabric—IT WILL NOT BE USED.

Using the Graber® Template Service

To use the template service:

1. Select template service when entering your order online.
2. Use the template worksheet (located on graberdirect.com) to determine what measurements you need to supply for each shape.
3. Enter the lettered measurements using line item comments.

For surcharge, see price charts.

How to measure for the template service:

- Measure the interior of the specialty application to the nearest $\frac{1}{8}$ " using a metal tape measure
- Document each measurement as outlined in "Wood Specialty Shapes: Arched Blinds" section
- Not available with gothic arch

General Information

Slat Count Table: 1" Wood Blinds

Number of Slats	1" Wood Blinds		Number of Slats	1" Wood Blinds	
	Finished Blind Height (inches)	Finished Stack Height (inches)		Finished Blind Height (inches)	Finished Stack Height (inches)
11	12	3 $\frac{3}{4}$	76	66 $\frac{5}{16}$	
12	12	4 $\frac{1}{16}$	77	67 $\frac{3}{16}$	
13	12 $\frac{15}{16}$		78	68	
14	13 $\frac{13}{16}$		79	68 $\frac{7}{8}$	
15	14 $\frac{5}{8}$		80	69 $\frac{11}{16}$	13 $\frac{15}{16}$
16	15 $\frac{1}{2}$		81	70 $\frac{9}{16}$	
17	16 $\frac{3}{8}$		82	71 $\frac{3}{8}$	
18	17 $\frac{1}{16}$		83	72 $\frac{1}{4}$	
19	18 $\frac{1}{16}$		84	73 $\frac{1}{8}$	
20	18 $\frac{5}{8}$	5 $\frac{1}{4}$	85	73 $\frac{15}{16}$	
21	19 $\frac{3}{4}$		86	74 $\frac{13}{16}$	
22	20 $\frac{9}{16}$		87	75 $\frac{5}{8}$	
23	21 $\frac{1}{16}$		88	76 $\frac{1}{2}$	
24	22 $\frac{1}{4}$		89	77 $\frac{1}{16}$	
25	23 $\frac{3}{8}$		90	78 $\frac{3}{16}$	15 $\frac{5}{8}$
26	24		91	79	
27	24 $\frac{13}{16}$		92	79 $\frac{7}{8}$	
28	25 $\frac{11}{16}$		93	80 $\frac{3}{4}$	
29	26 $\frac{1}{2}$		94	81 $\frac{1}{16}$	
30	27 $\frac{7}{8}$	6 $\frac{11}{16}$	95	82 $\frac{2}{16}$	
31	28 $\frac{3}{16}$		96	83 $\frac{1}{4}$	
32	29 $\frac{1}{16}$		97	84 $\frac{5}{8}$	
33	29 $\frac{5}{8}$		98	84 $\frac{15}{16}$	
34	30 $\frac{3}{4}$		99	85 $\frac{13}{16}$	
35	31 $\frac{1}{8}$		100	86 $\frac{5}{8}$	16 $\frac{7}{8}$
36	32 $\frac{2}{16}$		101	87 $\frac{1}{2}$	
37	33 $\frac{3}{16}$		102	88 $\frac{3}{8}$	
38	34 $\frac{1}{8}$		103	89 $\frac{3}{16}$	
39	35		104	90 $\frac{1}{16}$	
40	35 $\frac{13}{16}$	8 $\frac{5}{8}$	105	90 $\frac{5}{8}$	
41	36 $\frac{11}{16}$		106	91 $\frac{3}{4}$	
42	37 $\frac{1}{2}$		107	92 $\frac{2}{16}$	
43	38 $\frac{3}{8}$		108	93 $\frac{1}{16}$	
44	39 $\frac{3}{16}$		109	94 $\frac{1}{4}$	
45	40 $\frac{1}{16}$		110	95 $\frac{1}{8}$	18 $\frac{1}{4}$
46	40 $\frac{15}{16}$		111	95 $\frac{15}{16}$	
47	41 $\frac{3}{4}$		112	96 $\frac{13}{16}$	
48	42 $\frac{5}{8}$		113	97 $\frac{11}{16}$	
49	43 $\frac{1}{16}$		114	98 $\frac{1}{2}$	
50	44 $\frac{3}{16}$	9 $\frac{9}{16}$	115	99 $\frac{3}{8}$	
51	45 $\frac{1}{8}$		116	100 $\frac{3}{16}$	
52	46		117	101 $\frac{1}{16}$	
53	46 $\frac{13}{16}$		118	101 $\frac{5}{8}$	
54	47 $\frac{11}{16}$		119	102 $\frac{3}{4}$	
55	48 $\frac{9}{16}$		120	103 $\frac{9}{16}$	19 $\frac{3}{4}$
56	49 $\frac{5}{8}$		121	104 $\frac{7}{16}$	
57	50 $\frac{1}{4}$		122	105 $\frac{5}{16}$	
58	51 $\frac{1}{16}$		123	106 $\frac{1}{8}$	
59	51 $\frac{15}{16}$		124	107	
60	52 $\frac{3}{4}$	11	125	107 $\frac{13}{16}$	
61	53 $\frac{5}{8}$		126	108 $\frac{11}{16}$	
62	54 $\frac{1}{16}$		127	109 $\frac{1}{2}$	
63	55 $\frac{5}{16}$		128	110 $\frac{3}{8}$	
64	56 $\frac{3}{16}$		129	111 $\frac{1}{4}$	
65	57		130	112 $\frac{1}{16}$	21 $\frac{1}{16}$
66	57 $\frac{7}{8}$		131	112 $\frac{15}{16}$	
67	58 $\frac{11}{16}$		132	113 $\frac{3}{4}$	
68	59 $\frac{9}{16}$		133	114 $\frac{1}{8}$	
69	60 $\frac{3}{8}$		134	115 $\frac{7}{16}$	
70	61 $\frac{1}{4}$	12 $\frac{1}{2}$	135	116 $\frac{5}{16}$	
71	62 $\frac{1}{16}$		136	117 $\frac{1}{8}$	
72	62 $\frac{15}{16}$		137	118	
73	63 $\frac{13}{16}$		138	118 $\frac{13}{16}$	
74	64 $\frac{5}{8}$		139	119 $\frac{11}{16}$	
75	65 $\frac{1}{2}$		140	120 $\frac{1}{2}$	22 $\frac{5}{8}$

NOTE: Finished height includes headrail and bottomrail.

General Information

Slat Count Table: 2" Wood Blinds

Number of Slat	2" Wood and Elite Wood Blinds and NoHoles™		2" Wood and Elite Wood Blinds with Cordless Lift		Number of Slat	2" Wood and Elite Wood Blinds and NoHoles		2" Wood and Elite Wood Blinds with Cordless Lift	
	Finished Blind Height (inches)	Finished Stack Height (inches)	Finished Blind Height (inches)	Finished Stack Height (inches)		Finished Blind Height (inches)	Finished Stack Height (inches)	Finished Blind Height (inches)	Finished Stack Height (inches)
7	12	4 ³ / ₈	12	4 ³ / ₈	39	67 ⁷ / ₁₆		68 ¹ / ₁₆	
8	13 ¹ / ₁₆		14 ¹ / ₁₆		40	69 ¹ / ₄	9 ³ / ₈	69 ³ / ₄	10 ¹ / ₈
9	15 ⁹ / ₁₆		16 ¹ / ₁₆		41	71		71 ¹ / ₂	
10	17 ⁵ / ₁₆	4 ⁷ / ₈	17 ¹³ / ₁₆	5 ³ / ₈	42	72 ³ / ₄		73 ³ / ₄	
11	19 ¹ / ₁₆		19 ⁹ / ₁₆		43	74 ⁷ / ₁₆		74 ¹⁵ / ₁₆	
12	20 ³ / ₄		21 ¹ / ₄		44	76 ³ / ₁₆		76 ¹ / ₁₆	
13	22 ¹ / ₂		23		45	77 ¹⁵ / ₁₆		78 ⁷ / ₁₆	
14	24 ¹ / ₄		24 ³ / ₄		46	79 ¹ / ₁₆		80 ³ / ₁₆	
15	25 ⁵ / ₁₆		26 ⁷ / ₁₆		47	81 ³ / ₈		81 ⁷ / ₈	
16	27 ¹ / ₁₆		28 ³ / ₁₆		48	83 ³ / ₈		83 ⁵ / ₈	11 ⁷ / ₁₆
17	29 ⁷ / ₁₆		29 ¹⁵ / ₁₆		49	84 ⁷ / ₈		85 ⁵ / ₈	
18	31 ¹ / ₁₆		31 ¹ / ₁₆		50	86 ³ / ₁₆	11 ¹ / ₄	86	
19	32 ⁷ / ₈		33 ³ / ₈		51	88 ³ / ₁₆			
20	34 ³ / ₈	6 ¹ / ₂	35 ¹ / ₈	7	52	90 ¹ / ₁₆			
21	36 ³ / ₈		36 ⁷ / ₈		53	91 ¹³ / ₁₆			
22	38 ¹ / ₁₆		38 ⁹ / ₁₆		54	93 ¹ / ₂			
23	39 ⁹ / ₁₆		40 ⁵ / ₁₆		55	95 ¹ / ₄			
24	41 ¹ / ₁₆		42 ¹ / ₁₆		56	97			
25	43 ³ / ₁₆		43 ¹³ / ₁₆		57	98 ¹ / ₁₆			
26	45		45 ¹ / ₂		58	100 ³ / ₁₆			
27	46 ³ / ₄		47 ¹ / ₄		59	102 ³ / ₁₆			
28	48 ¹ / ₂		49		60	103 ³ / ₈	12 ¹³ / ₁₆		
29	50 ³ / ₁₆		50 ¹ / ₁₆		61	105 ³ / ₈			
30	51 ¹⁵ / ₁₆	8 ¹ / ₁₆	52 ⁷ / ₁₆	8 ³ / ₁₆	62	107 ³ / ₈			
31	53 ¹ / ₁₆		54 ³ / ₁₆		63	109 ³ / ₈			
32	55 ⁷ / ₁₆		55 ¹⁵ / ₁₆		64	110 ¹³ / ₁₆			
33	57 ¹ / ₈		57 ³ / ₈		65	112 ³ / ₁₆			
34	58 ³ / ₈		59 ³ / ₈		66	114 ³ / ₁₆			
35	60 ³ / ₈		61 ¹ / ₈		67	116			
36	62 ⁵ / ₁₆		62 ¹³ / ₁₆		68	117 ³ / ₄			
37	64 ¹ / ₁₆		64 ⁹ / ₁₆		69	119 ¹ / ₂	14 ¹ / ₄		
38	65 ¹⁵ / ₁₆		66 ³ / ₁₆		70	120			

NOTE: Finished height includes headrail and bottomrail. Excludes specialty shapes.

General Information

Slat Count Table: 2³/₈" Wood Blinds

Number of Slat	2 ³ / ₈ " Wood and Elite Wood Blinds and NoHoles™		2 ³ / ₈ " Wood and Elite Wood Blinds with Cordless Lift		Number of Slat	2 ³ / ₈ " Wood and Elite Wood Blinds and NoHoles		2 ³ / ₈ " Wood and Elite Wood Blinds with Cordless Lift	
	Finished Blind Height (inches)	Finished Stack Height (inches)	Finished Blind Height (inches)	Finished Stack Height (inches)		Finished Blind Height (inches)	Finished Stack Height (inches)	Finished Blind Height (inches)	Finished Stack Height (inches)
6			12	4 ¹⁵ / ₁₆	32	67 ¹ / ₈		67 ³ / ₄	
7	12	4 ³ / ₈	14 ³ / ₈		33	69 ¹ / ₄		69 ⁵ / ₈	
8	16 ¹ / ₁₆		16 ³ / ₄		34	71 ¹ / ₈		72	
9	18 ³ / ₁₆		18 ⁷ / ₈		35	73 ¹ / ₂		74 ¹ / ₈	
10	20 ⁵ / ₁₆	4 ⁷ / ₈	21	5 ⁵ / ₁₆	36	75 ⁵ / ₈		76 ¹ / ₄	
11	22 ⁷ / ₁₆		23 ¹ / ₈		37	77 ³ / ₄		78 ³ / ₈	
12	24 ⁹ / ₁₆		25 ¹ / ₄		38	79 ¹ / ₈		80 ¹ / ₂	
13	26 ¹ / ₁₆		27 ³ / ₈		39	82		82 ⁵ / ₈	
14	28 ³ / ₁₆		29 ¹ / ₂		40	84 ¹ / ₈	9 ⁵ / ₈	84 ³ / ₄	10 ⁵ / ₁₆
15	30 ⁵ / ₁₆		31 ⁵ / ₈		41	86 ¹ / ₄		86	
16	33 ³ / ₈		33 ³ / ₄		42	88 ³ / ₈			
17	35 ¹ / ₄		35 ⁵ / ₈		43	90 ¹ / ₂			
18	37 ³ / ₈		38		44	92 ¹ / ₄			
19	39 ¹ / ₂		40 ¹ / ₈		45	94 ³ / ₄			
20	41 ⁵ / ₈	6 ¹ / ₂	42 ¹ / ₄	7 ¹ / ₈	46	96 ⁵ / ₈			
21	43 ³ / ₄		44 ³ / ₈		47	99			
22	45 ⁵ / ₈		46 ¹ / ₂		48	101 ¹ / ₈			
23	48		48 ³ / ₈		49	103 ¹ / ₄			
24	50 ¹ / ₈		50 ³ / ₄		50	105 ³ / ₈	11 ¹ / ₄		
25	52 ¹ / ₄		52 ⁵ / ₈		51	107 ¹ / ₂			
26	54 ³ / ₈		55		52	109 ⁵ / ₈			
27	56 ¹ / ₂		57 ¹ / ₈		53	111 ³ / ₄			
28	58 ⁵ / ₈		59 ¹ / ₄		54	113 ⁷ / ₈			
29	60 ³ / ₄		61 ¹ / ₈		55	116			
30	62 ⁷ / ₈	8 ¹ / ₁₆	63 ¹ / ₂	8 ³ / ₄	56	118 ¹ / ₈	12 ³ / ₁₆		
31	65		65 ⁵ / ₈		57	120			

NOTE: Finished height includes headrail and bottomrail. Excludes specialty shapes.

General Information

Slat Count Table: 2" Composite, Premium Faux Wood, and Faux Wood Blinds

Number of Slats	2" Composite Blinds and NoHoles™		2" Premium Faux Wood and Faux Wood Blinds and NoHoles		2" Composite, Premium Faux Wood, and Faux Wood Blinds with Cordless Lift		Number of Slats	2" Composite Blinds and NoHoles		2" Premium Faux Wood and Faux Wood Blinds and NoHoles		2" Composite, Premium Faux Wood, and Faux Wood Blinds with Cordless Lift	
	Finished Blind Height (inches)	Finished Stack Height (inches)	Finished Blind Height (inches)	Finished Stack Height (inches)	Finished Blind Height (inches)	Finished Stack Height (inches)		Finished Blind Height (inches)	Finished Stack Height (inches)	Finished Blind Height (inches)	Finished Stack Height (inches)	Finished Blind Height (inches)	Finished Stack Height (inches)
5	12	4¼	12	4¼	12	4¾	37	67¾		67¾		66¾	
6	13⅓		13⅓		12½		38	69¼		69¼		68½	
7	15⅙		15⅙		14⅙		39	71		71		69¾	
8	17⅙		17⅙		16⅙		40	72¾	9⅙	72¾	9⅙	71½	10⅙
9	19⅙		19⅙		17⅓		41	74⅙		74⅙		72	
10	20¾	5⅙	20¾	5⅙	19⅙	5⅙	42	76⅙		76⅙			
11	22½		22½		21¼		43	77⅙		77⅙			
12	24¼		24¼		23		44	79⅙		79⅙			
13	25⅙		25⅙		24¾		45	81⅙		81⅙			
14	27⅙		27⅙		26⅙		46	83⅙		83⅙			
15	29⅙		29⅙		28⅙		47	84⅙		84⅙			
16	31⅙		31⅙		29⅙		48	86⅙		86⅙			
17	32⅙		32⅙		31⅙		49	88⅙		88⅙			
18	34⅙		34⅙		33⅙		50	90⅙	11⅙	90⅙	11⅙		
19	36⅙		36⅙		35⅙		51	91⅙		91⅙			
20	38⅙	6⅙	38⅙	6⅙	36⅙	7	52	93½		93½			
21	39⅙		39⅙		38⅙		53	95¼		95¼			
22	41⅙		41⅙		40⅙		54	97		97			
23	43⅙		43⅙		42⅙		55	98⅙		98⅙			
24	45		45		43⅙		56	100⅙		100⅙			
25	46¾		46¾		45½		57	102⅙		102⅙			
26	48½		48½		47¼		58	103⅙		103⅙			
27	50⅙		50⅙		49		59	105⅙		105⅙			
28	51⅙		51⅙		50⅙		60	107⅙	13	107⅙	13		
29	53⅙		53⅙		52⅙		61	109⅙		109⅙			
30	55⅙	8¼	55⅙	8¼	54⅙	8⅙	62	110⅙		110⅙			
31	57⅙		57⅙		55⅙		63	112⅙		112⅙			
32	58⅙		58⅙		57⅙		64	114⅙		114⅙			
33	60⅙		60⅙		59⅙		65	116		116			
34	62⅙		62⅙		61⅙		66	117¼		117¼			
35	64⅙		64⅙		62⅙		67	119½		119½			
36	65⅙		65⅙		64⅙		68	121¼	14¼	121¼	14¼		

NOTE: Finished height includes headrail and bottomrail.

General Information

Slat Count Table: 2½" Composite, Premium Faux Wood, and Faux Wood Blinds

Number of Slats	2½" Composite Blinds and NoHoles™		2½" Premium Faux Wood and Faux Wood Blinds and NoHoles		2½" Composite, Premium Faux Wood, and Faux Wood Blinds with Cordless Lift	
	Finished Blind Height (inches)	Finished Stack Height (inches)	Finished Blind Height (inches)	Finished Stack Height (inches)	Finished Blind Height (inches)	Finished Stack Height (inches)
5	12	4¼	12	4¼	12	4¾
6	16⅜		16⅜		14⅝	
7	18⅝		18⅝		16¾	
8	20⅞		20⅞		18⅞	
9	22⅞		22⅞		21	
10	24⅞	5⅞	24⅞	5⅞	23⅞	5⅞
11	26⅞		26⅞		25¼	
12	28⅞		28⅞		27⅞	
13	31⅞		31⅞		29½	
14	33⅞		33⅞		31⅞	
15	35⅞		35⅞		33¾	
16	37⅞		37⅞		35⅞	
17	39⅞		39⅞		38	
18	41⅞		41⅞		40⅞	
19	43⅞		43⅞		42¼	
20	46	6⅞	46	6⅞	44⅞	7⅞
21	48⅞		48⅞		46½	
22	50¼		50¼		48⅞	
23	52⅞		52⅞		50¾	
24	54½		54½		52⅞	
25	56⅞		56⅞		55	
26	58¾		58¾		57⅞	
27	60⅞		60⅞		59¼	
28	63		63		61⅞	
29	65⅞		65⅞		63½	
30	67¼	8¼	67¼	8¼	65⅞	8¾

Number of Slats	2½" Composite Blinds and NoHoles		2½" Premium Faux Wood and Faux Wood Blinds and NoHoles		2½" Composite, Premium Faux Wood, and Faux Wood Blinds with Cordless Lift	
	Finished Blind Height (inches)	Finished Stack Height (inches)	Finished Blind Height (inches)	Finished Stack Height (inches)	Finished Blind Height (inches)	Finished Stack Height (inches)
31	69⅞		69⅞		67¾	
32	71½		71½		69⅞	
33	73⅞		73⅞		72	
34	75¾		75¾			
35	77⅞		77⅞			
36	80		80			
37	82⅞		82⅞			
38	84¼		84¼			
39	86⅞		86⅞			
40	88½	9⅞	88½	9⅞		
41	90⅞		90⅞			
42	92¼		92¼			
43	94⅞		94⅞			
44	97		97			
45	99⅞		99⅞			
46	101¼		101¼			
47	103⅞		103⅞			
48	105½		105½			
49	107⅞		107⅞			
50	109¾	11⅞	109¾	11⅞		
51	111⅞		111⅞			
52	114		114			
53	116⅞		116⅞			
54	118¼		118¼			
55	120⅞	12⅞	120⅞	12⅞		

NOTE: Finished height includes headrail and bottomrail.

General Information

Slat Route and Ladder Count Charts

Take any inside mount deductions before determining ladder quantity (inside mount— $\frac{1}{2}$ "; outside mount—no deduction).

Blinds with two lift cords will have two clear plastic cord stop beads located approximately 2" below the headrail. Cords will continue down, each ending in a tassel. Blinds with three or more lift cords will have the cords joined together with a tassel approximately 2" below the headrail. Two individual cords will continue down, each ending in a tassel.

Traditions® 1" Wood Blinds

For Standard or Reverse Controls

Finished Blind Width (inches)	Slat End Route (inches)	# of Ladders	# of Lifts	# of Center Brackets
7 to $8\frac{15}{16}$	$1\frac{3}{4}$	2	2	0
9 to $13\frac{3}{4}$	$3\frac{3}{4}$	2	2	0
$13\frac{13}{16}$ to $20\frac{3}{4}$	4	2	2	0
$20\frac{13}{16}$ to 35	6	2	2	0
$35\frac{1}{16}$ to 58	6	3	2	1 over 48" FBW
$58\frac{1}{16}$ to 81	6	4	4	2 over 78" FBW
$81\frac{1}{16}$ to 96	6	5	4	2

For Same Side Controls

$13\frac{13}{16}$ to $20\frac{3}{4}$	$4\frac{7}{8}$	As stated above		
$20\frac{13}{16}$ to 96	6	As stated above		

NOTES:

- Maximum spacing between ladders is 23".
- Standard control positions: lift right/tilt left.
- Maximum slat width is 96". Wider blinds must be multiple blinds on one headrail.

Traditions 2" and $2\frac{3}{8}$ " Wood Blinds

For Standard or Reverse Controls

Finished Blind Width (inches)	Slat End Route (inches)	# of Ladders	# of Lifts	NoHoles™ # of Cords	# of Center Brackets
7 to $8\frac{15}{16}$	$1\frac{3}{8}$	2	2	4	0
9 to $11\frac{15}{16}$	$2\frac{3}{8}$	2	2	4	0
12 to 24	4	2	2	4	0
$24\frac{1}{16}$ to 36	6	2	2	4	0
$36\frac{1}{16}$ to 60	6	3	2	3	1 over 48" FBW
$60\frac{1}{16}$ to 84	6	4	4	4	2 over 72" FBW
$84\frac{1}{16}$ to 96	6	5	4	4	2

For Same Side Controls

$16\frac{1}{16}$ to 96	6	As stated above			
------------------------	---	-----------------	--	--	--

NOTES:

- Maximum spacing between ladders is 24".
- Standard control positions: lift right/tilt left.
- Maximum slat width is 96". Wider blinds must be multiple blinds on one headrail.
- $7"$ to $8\frac{15}{16}"$ not available with cloth tapes.
- Cloth tape ladder quantity is the same as number of ladders listed above.

Traditions 2" and $2\frac{3}{8}$ " Wood Blinds with Cordless Lift

For Standard or Reverse Controls

Finished Blind Width (inches)	Slat End Route (inches)	# of Ladders	# of Lifts	# of Center Brackets
12 to 24	4	2	2	0
$24\frac{1}{16}$ to $36\frac{1}{2}$	$6\frac{1}{2}$	2	2	0
$36\frac{1}{16}$ to 50	$6\frac{1}{2}$	3	2	1 over 48" FBW
$50\frac{1}{16}$ to 60	$6\frac{1}{2}$	3	3	1
$60\frac{1}{16}$ to 84	$6\frac{1}{2}$	4	4	2 over 72" FBW

NOTES:

- Maximum spacing between ladders is $23\frac{1}{2}"$.
- Standard control positions: tilt left; tilt right is optional.
- Maximum slat width is 84". Wider blinds must be multiple blinds on one headrail.

General Information

Slat Route and Ladder Count Charts

Take any inside mount deductions before determining ladder quantity (inside mount— $\frac{1}{2}$ "; outside mount—no deduction). Excludes specialty shapes.

Blinds with two lift cords will have two clear plastic cord stop beads located approximately 2" below the headrail. Cords will continue down, each ending in a tassel. Blinds with three or more lift cords will have the cords joined together with a tassel approximately 2" below the headrail. Two individual cords will continue down, each ending in a tassel.

2" and 2 $\frac{3}{8}$ " Elite Wood Blinds

For Standard or Reverse Controls

Finished Blind Width (inches)	Slat End Route (inches)	# of Ladders	# of Lifts	NoHoles™ # of Cords	# of Center Brackets
7 to 8 $\frac{15}{16}$	1 $\frac{3}{8}$	2	2	4	0
9 to 11 $\frac{15}{16}$	2 $\frac{3}{8}$	2	2	4	0
12 to 24	4	2	2	4	0
24 $\frac{1}{16}$ to 36	6	2	2	4	0
36 $\frac{1}{16}$ to 60	6	3	2	3	1 over 48" FBW
60 $\frac{1}{16}$ to 84	6	4	4	4	2 over 72" FBW
84 $\frac{1}{16}$ to 96	6	5	4	4	2

For Same Side Controls

16 $\frac{1}{16}$ to 96	6	As stated above			
-------------------------	---	-----------------	--	--	--

NOTES:

- Maximum spacing between ladders is 24".
- Standard control positions: lift right/tilt left.
- Maximum slat width is 96". Wider blinds must be multiple blinds on one headrail.
- 7" to 8 $\frac{15}{16}$ " not available with cloth tapes.
- Cloth tape ladder quantity is the same as number of ladders listed above.

2" and 2 $\frac{3}{8}$ " Elite Wood Blinds with Cordless Lift

For Standard or Reverse Controls

Finished Blind Width (inches)	Slat End Route (inches)	# of Ladders	# of Lifts	# of Center Brackets
12 to 24	4	2	2	0
24 $\frac{1}{16}$ to 36 $\frac{1}{2}$	6 $\frac{1}{2}$	2	2	0
36 $\frac{3}{16}$ to 50	6 $\frac{1}{2}$	3	2	1 over 48" FBW
50 $\frac{1}{16}$ to 60	6 $\frac{1}{2}$	3	3	1
60 $\frac{1}{16}$ to 84	6 $\frac{1}{2}$	4	4	2 over 72" FBW

NOTES:

- Maximum spacing between ladders is 23 $\frac{1}{2}$ ".
- Standard control positions: tilt left; tilt right is optional.
- Maximum slat width is 84". Wider blinds must be multiple blinds on one headrail.

General Information

Slat Route and Ladder Count Charts

Take any inside mount deductions before determining ladder quantity (inside mount— $\frac{1}{2}$ "; outside mount—no deduction).

Blinds with two lift cords will have two clear plastic cord stop beads located approximately 2" below the headrail. Cords will continue down, each ending in a tassel. Blinds with three or more lift cords will have the cords joined together with a tassel approximately 2" below the headrail. Two individual cords will continue down, each ending in a tassel.

Traditions® 2" and 2½" Composite Blinds

For Standard or Reverse Controls

Finished Blind Width (inches)	Slat End Route (inches)	# of Ladders	# of Lifts	NoHoles™ # of Cords	# of Center Brackets
7 to 8 $\frac{15}{16}$	1 $\frac{3}{8}$	2	2	4	0
9 to 11 $\frac{15}{16}$	2 $\frac{3}{8}$	2	2	4	0
12 to 22	4	2	2	4	0
22 $\frac{1}{16}$ to 38	5	3	2	3	0
38 $\frac{1}{16}$ to 52	5	4	4	4	1 over 48" FBW
52 $\frac{1}{16}$ to 66	5	5	3	4	1
66 $\frac{1}{16}$ to 80	5	6	4	4	2 over 72" FBW
80 $\frac{1}{16}$ to 94	5	7	4	5	2
94 $\frac{1}{16}$ to 96	5	8	4	6	2

For Same Side Controls

Finished Blind Width (inches)	Slat End Route (inches)	# of Ladders	# of Lifts	NoHoles # of Cords	# of Center Brackets
6 $\frac{1}{16}$ to 26	6	2	2	4	0
26 $\frac{1}{16}$ to 40	6	3	2	3	0
40 $\frac{1}{16}$ to 54	6	4	4	4	1 over 48" FBW
54 $\frac{1}{16}$ to 68	6	5	3	4	1
68 $\frac{1}{16}$ to 80	6	6	4	4	2 over 72" FBW
80 $\frac{1}{16}$ to 94	6	7	4	5	2
94 $\frac{1}{16}$ to 96	6	8	4	6	2

NOTES:

- Maximum spacing between ladders is 14".
- Standard control positions: lift right/tilt left.
- Maximum slat width is 96". Wider blinds must be multiple blinds on one headrail.
- 7" to 8 $\frac{15}{16}$ " not available with cloth tapes.
- Cloth tape ladder quantity is the same as number of ladders listed above.

Traditions 2" and 2½" Composite Blinds with Cordless Lift

For Standard or Reverse Controls

Finished Blind Width (inches)	Slat End Route (inches)	# of Ladders	# of Lifts	# of Center Brackets
12 to 22	4	2	2	0
22 $\frac{1}{16}$ to 38	5	3	3	0
38 $\frac{1}{16}$ to 52	5	4	4	1 over 48" FBW
52 $\frac{1}{16}$ to 66	5	5	5	1

NOTES:

- Maximum spacing between ladders is 14".
- Standard control positions: tilt left; tilt right is optional.
- Maximum slat width is 66". Wider blinds must be multiple blinds on one headrail.

General Information

Slat Route and Ladder Count Charts

Take any inside mount deductions before determining ladder quantity (inside mount— $\frac{1}{2}$ "; outside mount—no deduction).

Blinds with two lift cords will have two clear plastic cord stop beads located approximately 2" below the headrail. Cords will continue down, each ending in a tassel. Blinds with three or more lift cords will have the cords joined together with a tassel approximately 2" below the headrail. Two individual cords will continue down, each ending in a tassel.

Lake Forest® 2" and 2½" Premium Faux Wood and Faux Wood Blinds

For Standard or Reverse Controls

Finished Blind Width (inches)	Slat End Route (inches)	# of Ladders	# of Lifts	NoHoles™ # of Cords	# of Center Brackets
7 to 8 $\frac{15}{16}$	1 $\frac{3}{8}$	2	2	4	0
9 to 11 $\frac{15}{16}$	2 $\frac{3}{8}$	2	2	4	0
12 to 19	4	2	2	4	0
19 $\frac{1}{16}$ to 30	4	3	2	3	0
30 $\frac{1}{16}$ to 41	4	4	4	4	0
41 $\frac{1}{16}$ to 52	4	5	3	4	1 over 48" FBW
52 $\frac{1}{16}$ to 63	4	6	4	4	1
63 $\frac{1}{16}$ to 74	4	7	4	5	1
74 $\frac{1}{16}$ to 85	4	8	4	6	2
85 $\frac{1}{16}$ to 96	4	9	4	5	2

NOTES:

1. Maximum spacing between ladders is 11".
2. Standard control positions: lift right/tilt left.
3. Maximum slat width is 96". Wider blinds must be multiple blinds on one headrail.
4. 7" to 8 $\frac{15}{16}$ " not available with cloth tapes.
5. Cloth tape ladder quantity is the same as number of ladders listed above.

Lake Forest 2" and 2½" Premium Faux Wood and Faux Wood Blinds with Cordless Lift

For Standard or Reverse Controls

Finished Blind Width (inches)	Slat End Route (inches)	# of Ladders	# of Lifts	# of Center Brackets
12 to 19	4	2	2	0
19 $\frac{1}{16}$ to 30	4	3	2	0
30 $\frac{1}{16}$ to 41	4	4	4	0
41 $\frac{1}{16}$ to 52	4	5	3	1 over 48" FBW
52 $\frac{1}{16}$ to 63	4	6	6	1


NOTES:

1. Maximum spacing between ladders is 11".
2. Standard control positions: tilt left; tilt right is optional.
3. Maximum slat width is 63". Wider blinds must be multiple blinds on one headrail.


General Information

Traditions® 1", 2", and 2⅜" Wood and 2" and 2⅜" Elite Wood Blinds Product Detail

2" and 2⅜" Blinds

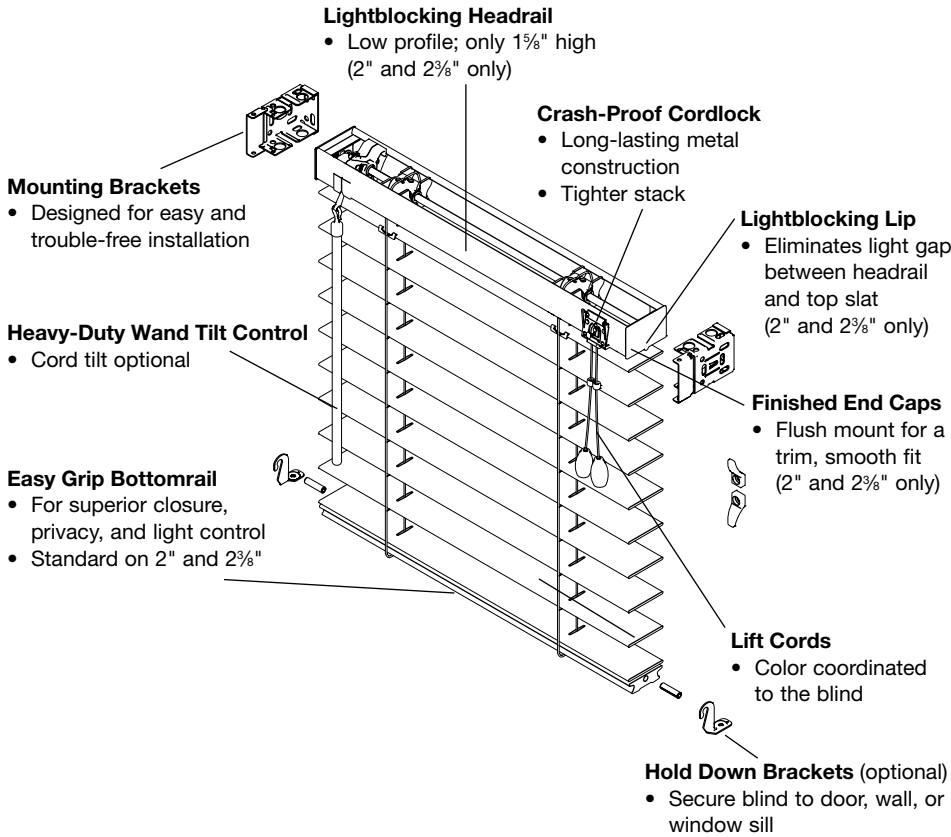


1" Blind

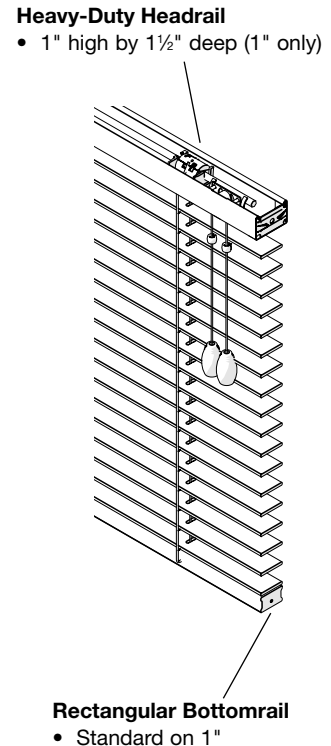


NoHoles™


- Available with 2" and 2⅜"

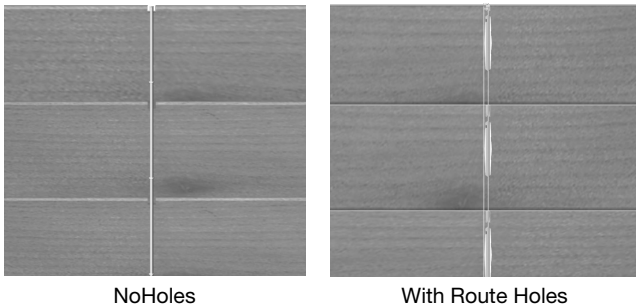

Cord Management Options

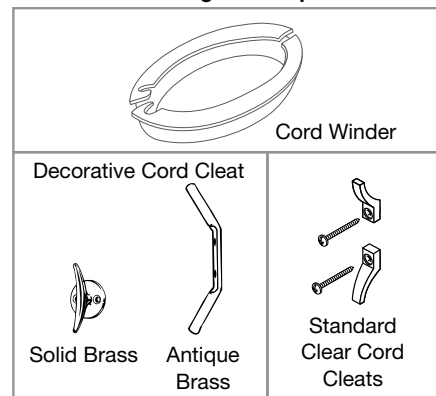


Slat Comparison



General Information

Cordless Lift Blinds Product Detail: Wood, Composite, and Faux Wood

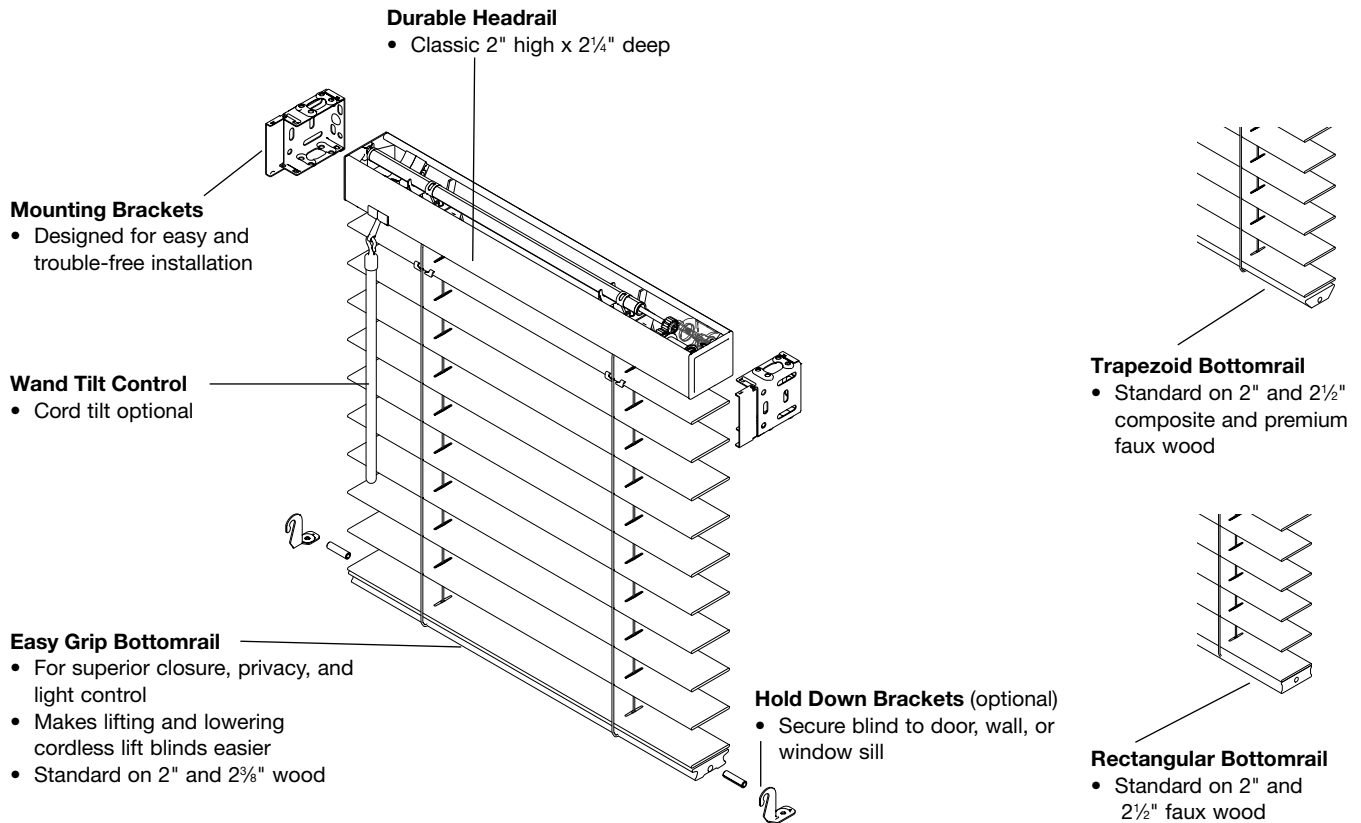


Pair cordless lift with wand tilt for a blind that eliminates operating cords and is safer for homes with children and pets, or pair it with cord tilt for fast, simple control.

To lower blind, simply pull down on the bottomrail. To raise the blind, simply guide the blind into the desired location by gently lifting the bottomrail.

Not available with sky pole option.


Slat Comparison

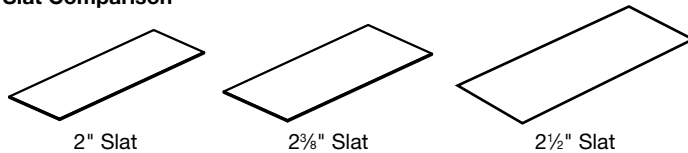

General Information


Traditions® 2" and 2½" Composite Blinds Product Detail

2" Slat Shown

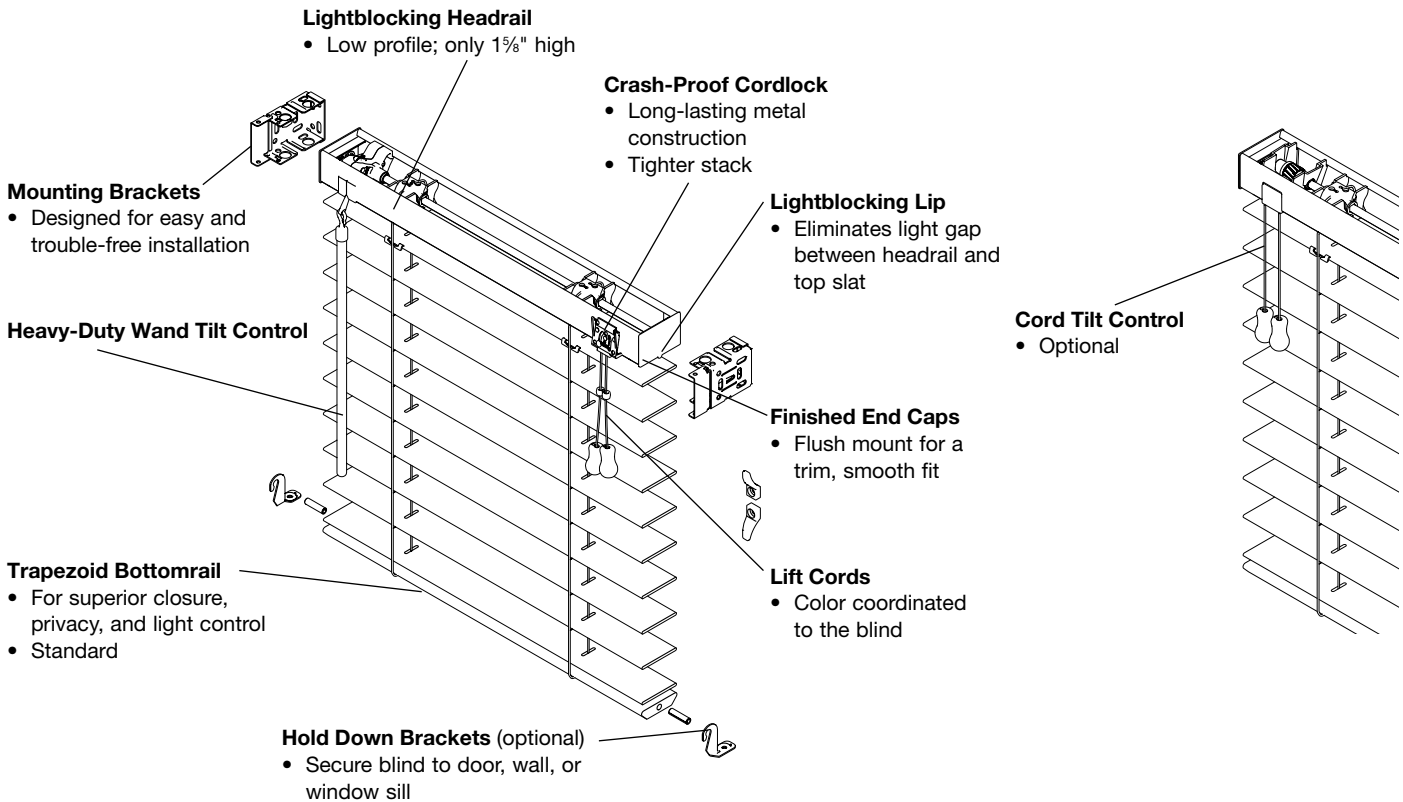


NoHoles™


- Available with 2" and 2½"

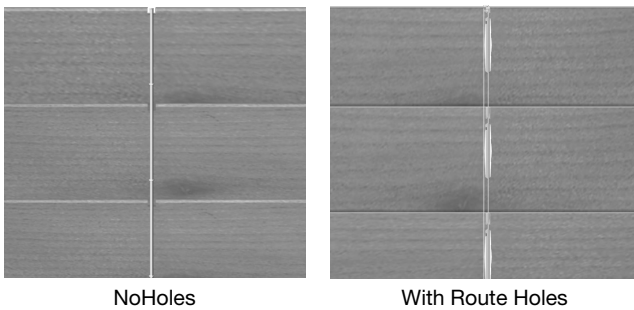

Slat Comparison

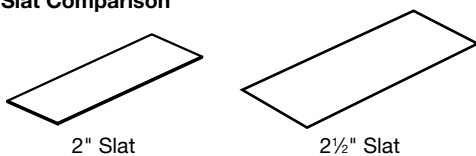


Cord Management Options

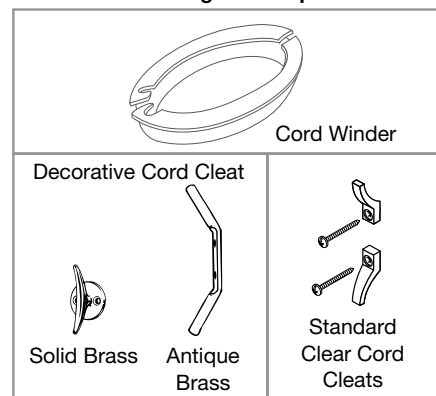

General Information


Lake Forest® 2" and 2½" Premium Faux Wood and Faux Wood Blinds Product Detail

2" Slat Shown

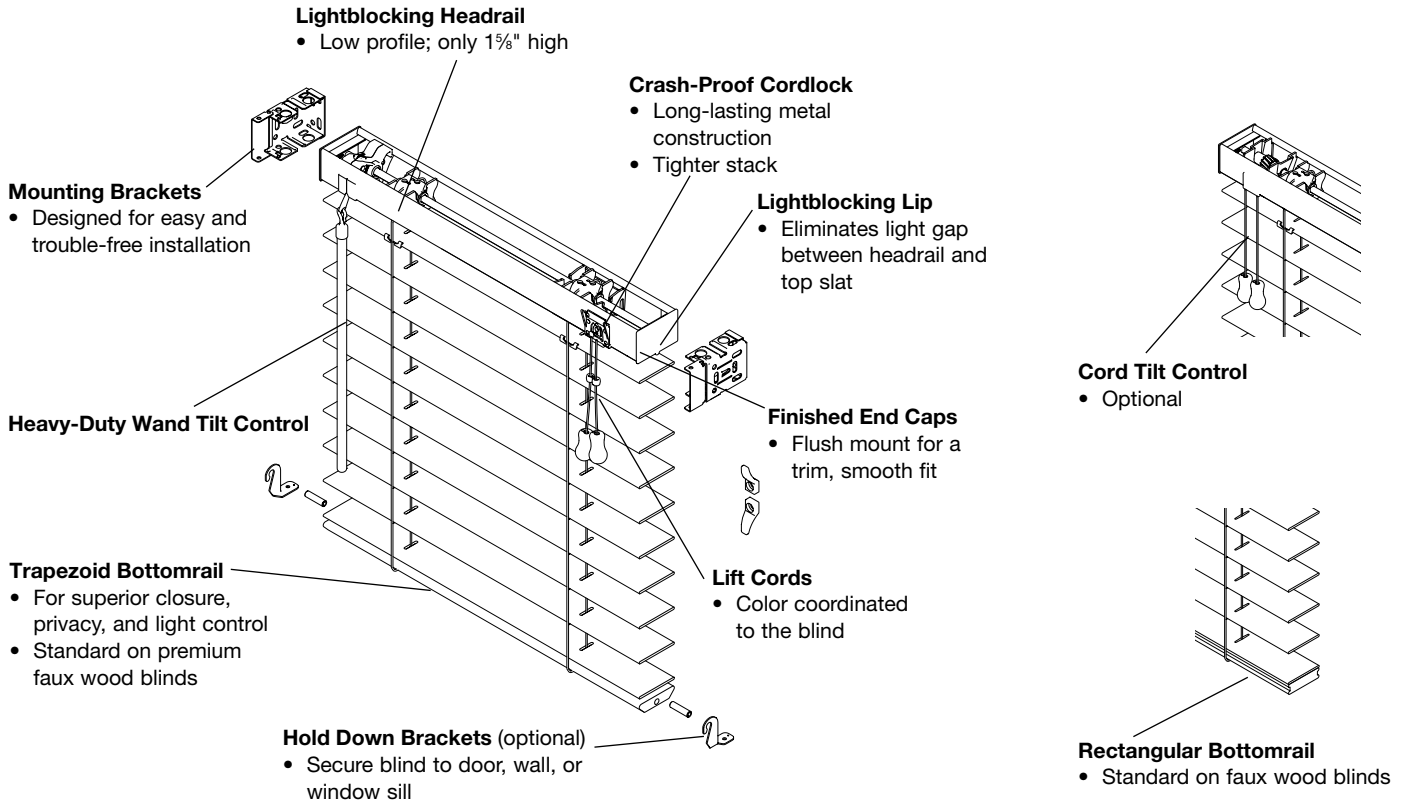


NoHoles™

- Available with 2" and 2½"




NoHoles




With Route Holes

Slat Comparison



Cord Management Options

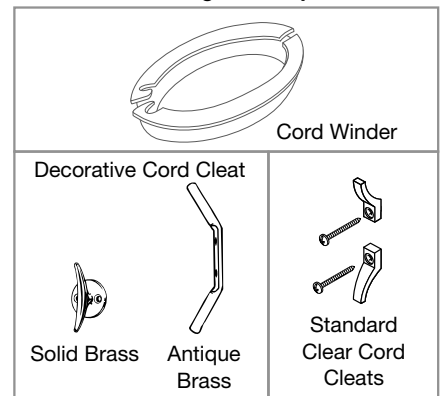


Wood Vertical Blinds

Features



- Available in all Graber® Traditions® wood paints and stains
- Custom color available
- G-71 headrail features the patented pantograph traversing system to assure proportional spacing of vanes
- Unique design features multiple hinges on each vane to ensure they hang straight—without warping or twisting
- One-way or split stack available

Size Considerations

Blind Type				
	Width		Height	
	Minimum Blind (exact) (inches)	Maximum Blind (inches)	Minimum Blind (inches)	Maximum Blind (inches)
	Elite Wood Vertical Blinds	9	144*	6


*Blinds over 96" wide: must be a split stack due to the weight of wood vane.

Depth Requirements for Inside Mount

Blind Type	Headrail Dimensions (inches)		Partially recessed headrail in window casing/ molding		Fully recessed headrail in window casing/ molding	Depth Needed for Flush Mount Vane (inches)	Depth Needed for Flush Mount Valance (inches)
		Minimum Depth Mount (inches)		Flush with Casing (inches)			
Elite Wood Vertical Blinds	1 3/8 x 1 15/16	2 3/8		3		3 3/4	4 5/8


Wood Vertical Blinds

Options: Cord and Chain Control

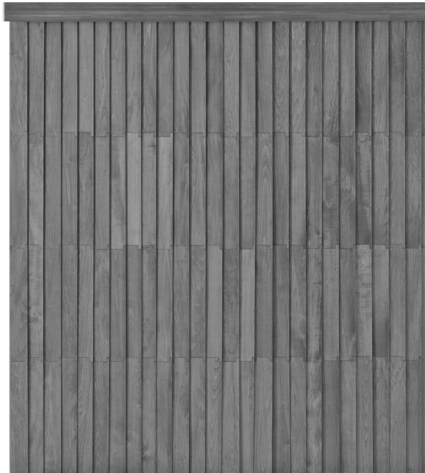


- Cord and chain control standard

Opening	Standard Controls	Optional Controls
Split Stack	Right	Left
One-Way Stack Right	Right	Left
One-Way Stack Left	Left	Right
Opposite Stack and Control	Left stack/right control	Right stack/left control

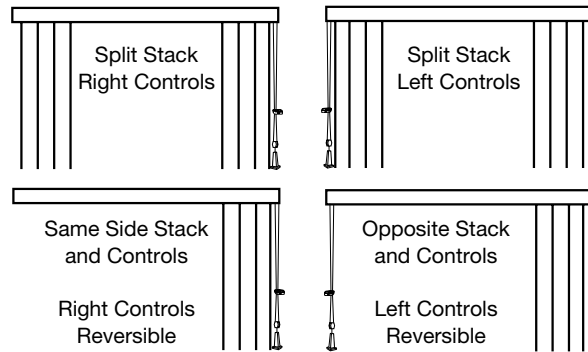


Chain and traversing cord must be at the same end of the track.

Paired Blinds

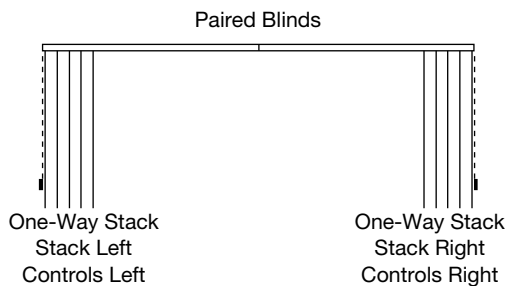

- **Price as two separate blinds**
- The appearance of a split stack blind can be achieved by pairing two individual one-way stack blinds; the center opening point can be either on center or off center
- Paired blinds can also be used when the required width is larger than the maximum width available for a single blind
- Specify paired blinds on your order
- Control locations must be same as stack
- Cut-outs not available
- Warranty will be voided if one-way stack is wider than 96"
- Available with one-way cord and chain only

Replacement Vane Ordering

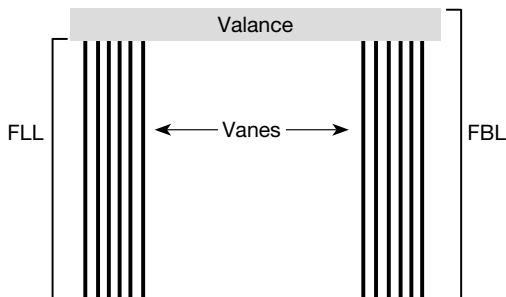

FLL = Finished vane length/height—the measurement from the top of the vane to the bottom of the vane. This measurement is approximately 2¼" less than the FBL.

FBL = Finished blind length/height—the measurement from the top of the headrail to the bottom of the vane.

- **For surcharge, see price charts**


How to Measure a Replacement Existing Vane, No Changes

- Measure the vane(s) from tip to tip to determine the exact length/height (FLL)
- Finished vane length (FLL) is measured from top of metal vane clip to the bottom of the vane
- No additional deductions will be taken by manufacturing; vanes will be manufactured to the exact size provided
- Submit the measurement as exact height

How to Measure a Replacement Existing Vane, Changing the Height of the Vanes

- Measure from top of mounted headrail to bottom of location to be covered
- Record this measurement; this is the finished blind length/height (FBL)
- Manufacturing will take appropriate deduction so vanes will cover desired area

NOTE: When ordering replacement vanes only, hinge direction must be indicated (up or down).

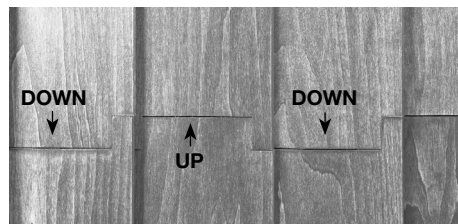

Wood Vertical Blinds

Stacking Chart and How to Measure for an Uncovered Window


Vertical Vane Stacking Chart				
Number of Vanes	One-Way		Split-Stack	
	CO (inches)	FBW (inches)	CO (inches)	FBW (inches)
3	7 $\frac{1}{8}$	10 $\frac{1}{2}$		
4	9 $\frac{1}{4}$	13 $\frac{5}{8}$	7 $\frac{1}{8}$	13 $\frac{1}{4}$
5	12 $\frac{3}{8}$	16 $\frac{3}{4}$		
6	15 $\frac{1}{8}$	19 $\frac{1}{8}$	13 $\frac{1}{8}$	19 $\frac{1}{2}$
7	17 $\frac{1}{4}$	23		
8	20 $\frac{3}{8}$	26 $\frac{1}{2}$	18 $\frac{3}{8}$	25 $\frac{1}{4}$
9	23	29 $\frac{1}{4}$		
10	25 $\frac{1}{8}$	32 $\frac{1}{2}$	23 $\frac{1}{8}$	32
11	28 $\frac{1}{4}$	35 $\frac{1}{2}$		
12	30 $\frac{3}{8}$	38 $\frac{1}{2}$	29	38 $\frac{1}{4}$
13	33 $\frac{1}{2}$	41 $\frac{1}{4}$		
14	36 $\frac{1}{8}$	44 $\frac{1}{2}$	34 $\frac{1}{4}$	44 $\frac{1}{2}$
15	38 $\frac{1}{4}$	48		
16	41 $\frac{1}{8}$	51 $\frac{1}{8}$	39 $\frac{1}{2}$	50 $\frac{1}{4}$
17	44	54 $\frac{1}{4}$		
18	46 $\frac{3}{8}$	57 $\frac{1}{2}$	44 $\frac{3}{4}$	57
19	49 $\frac{1}{4}$	60 $\frac{1}{2}$		
20	51 $\frac{1}{8}$	63 $\frac{3}{8}$	50	63 $\frac{1}{4}$
21	54 $\frac{1}{2}$	66 $\frac{3}{4}$		
22	57 $\frac{1}{4}$	69 $\frac{1}{8}$	55 $\frac{1}{4}$	69 $\frac{1}{2}$
23	59 $\frac{1}{8}$	73		
24	62 $\frac{1}{2}$	76 $\frac{1}{8}$	60 $\frac{1}{2}$	75 $\frac{3}{4}$
25	65 $\frac{1}{8}$	79 $\frac{1}{4}$		
26	67 $\frac{3}{4}$	82 $\frac{3}{8}$	65 $\frac{1}{4}$	82
27	70 $\frac{3}{8}$	85 $\frac{1}{2}$		
28	73	88 $\frac{1}{8}$	71 $\frac{1}{8}$	88 $\frac{1}{4}$
29	75 $\frac{5}{8}$	91 $\frac{1}{4}$		
30	78 $\frac{1}{4}$	94 $\frac{7}{8}$	76 $\frac{1}{2}$	94 $\frac{1}{2}$
31	80 $\frac{7}{8}$	98		
32	83 $\frac{1}{2}$	101 $\frac{1}{8}$	81 $\frac{1}{2}$	100 $\frac{1}{4}$
33	86 $\frac{1}{8}$	104 $\frac{1}{4}$		
34	88 $\frac{1}{4}$	107 $\frac{1}{8}$	86 $\frac{1}{8}$	107
35	91 $\frac{1}{8}$	110 $\frac{1}{2}$		
36	94	113 $\frac{3}{8}$	92 $\frac{1}{8}$	113 $\frac{1}{4}$
37	96 $\frac{3}{8}$	116 $\frac{1}{4}$		
38	99 $\frac{1}{4}$	119 $\frac{1}{8}$	97 $\frac{1}{8}$	119 $\frac{1}{2}$
39	101 $\frac{1}{8}$	123		
40	104 $\frac{1}{8}$	126 $\frac{1}{8}$	102 $\frac{1}{8}$	125 $\frac{3}{4}$
41	107 $\frac{1}{4}$	129 $\frac{1}{4}$		
42	109 $\frac{1}{8}$	132 $\frac{3}{8}$	107 $\frac{1}{8}$	132
43	112 $\frac{1}{2}$	135 $\frac{1}{2}$		
44	115 $\frac{1}{8}$	138 $\frac{1}{8}$	113 $\frac{1}{8}$	138 $\frac{1}{4}$
45	117 $\frac{3}{4}$	141 $\frac{1}{4}$		
46	119 $\frac{1}{2}$	144	117 $\frac{1}{8}$	144

1. Determine the clear opening width for one-way stack or split stack (see diagrams)—the additional 3" shown for privacy is recommended if ordering one-way stack.
2. Match the clear opening width dimension found under CO column. For even spacing, round up width measurement to the next size in the stack chart. Split stack will have even numbers of vanes.
3. Order the corresponding dimension found in the FBW (finished blind width) column.


EXAMPLE: One-way stack if determined width for clear opening window view is 54 $\frac{1}{2}$ ", order width needed to provide full unobstructed view is 66 $\frac{3}{4}$ ".

NOTE: For one-way stack blinds add an additional 3" to the clear opening before calculating the finished blind width.

One-Way Stack Finished Blind Width (FBW)

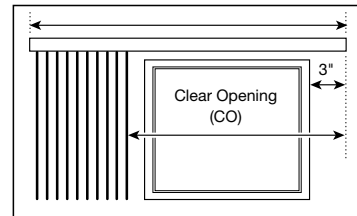

Split-Stack
(recommended for balanced appearance)
finished blind width (FBW)

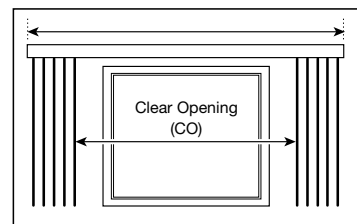


Wood Vertical Blinds

Product Detail

Pantograph Traversing System

- Keeps vanes evenly spaced whether blind is closed or partially open

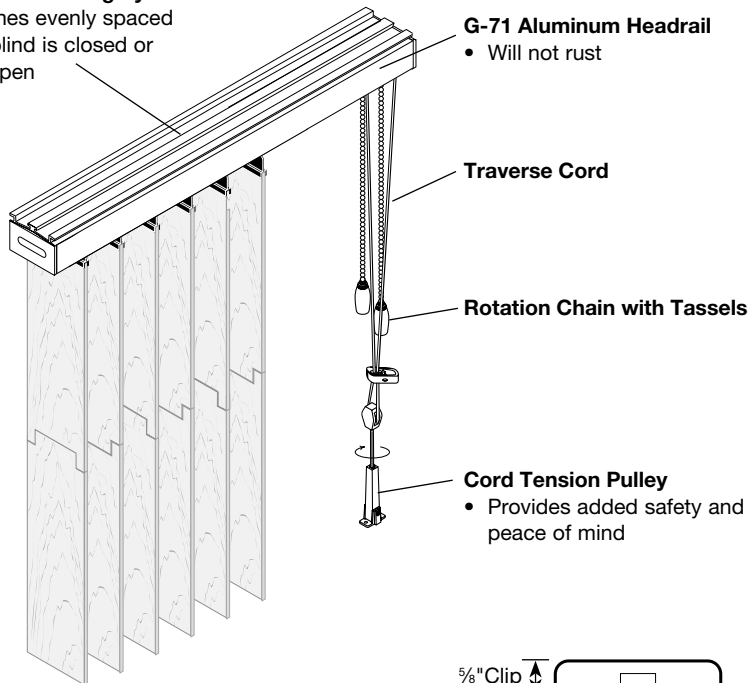

- G-71 Aluminum Headrail**
- Will not rust

Traverse Cord

Rotation Chain with Tassels


Cord Tension Pulley

- Provides added safety and peace of mind




Vertical Vane Splice

- See chart for splices vs. height of vane




Height of Vanes without Metal Clip (inches)	Number of Splices Per Vane
0 to 24	0
24 ¹ / ₁₆ to 47 ¹ / ₁₆	1
47 ³ / ₁₆ to 70 ¹ / ₂	2
70 ³ / ₁₆ to 93 ³ / ₁₆	3
93 ¹³ / ₁₆ to 117	4


Installation Hardware for Wood Vertical Blinds



Track Clip for Inside or Ceiling Mount



Angle Bracket for Outside or Wall Mount



Optional 4" Angle Bracket

NOTE: Must be requested at time of order.

Mount	Standard/Optional	Hardware
Inside	Standard	Track clip
Outside	Standard	3 ³ / ₄ " angle bracket with track clip
	Optional	4" angle bracket with track clip

GRABER®

Graber is a brand of Springs Window Fashions, the Best Experience Company

Graber and the Graber logo are registered trademarks of Springs Window Fashions, LLC.

10009-110 (11/19)|S19-19704