

Graber Foundations® Faux Wood Blinds English US Price Guide

CORDLESS FAUX WOOD BLINDS

Product Information Guide

How to Measure	
Inside Mount	
Outside Mount Cordless Faux Wood Blinds	2
Product Detail	3
Size Considerations	3
Valance Options	3

NOTE: For orders of 50 blinds or more, please call customer service for estimated delivery time.



FOUNDATIONS

NOVEMBER 2019

How to Measure Cordless Faux Wood Blinds


Measure each window individually as size variances are common. Record width first, then height (also referred to as length) to the nearest 1/8". Measure width from left to right, height from top to bottom, using a steel tape measure. Do not use a cloth tape.

Inside Mount

Inside mount blinds are installed inside the window casing. Window casing must be at least the listed depths for inside mount blinds.

Type of Blind	Minimum Depth Mount (inches)	Depth Needed for Full Recess (inches)
Faux Wood-Headrail Only	1	2 5∕8
Faux Wood-Headrail with Standard Valance	1	3⅓
Faux Wood-Headrail with Decorative Valance	1	31/4


- 1. Measure the exact inside width of the window casing from one inside edge to the other in three different places. Record the narrowest measurement.
- Measure the exact height in three different places from top edge of opening to top of sill. Record the longest measurement.
- 3. Measure the window diagonally in two places as shown. If the two diagonal dimensions are not equal, we recommend an outside mount application for optimal function and aesthetics.
- 4. Do not take deductions. Allowances are made at the factory to ensure a perfect fit.




Outside Mount

Outside mount blinds are installed outside the window casing, covering an area larger than the window itself.

- 1. Measure the exact width to be covered. If window opening allows, overlap by at least 1½" on each side (3" total overlap) to ensure light control and privacy.
- 2. Measure the exact height to be covered, including desired overlap (typically from top edge of molding to bottom edge, or to top of sill if there is one).
- 3. The factory makes NO allowances on outside mount.



Cordless Faux Wood Blinds

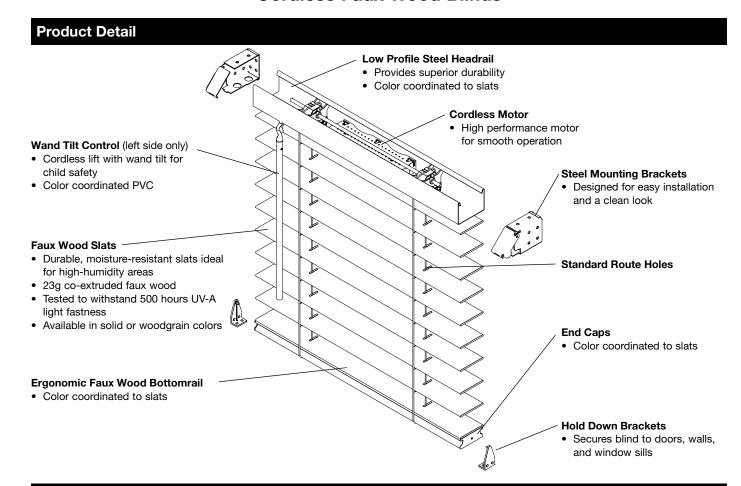

Size Considerations

Minimum Blind Width (inches)	15½ inside mount* 15 outside mount
Maximum Blind Width (inches)	72½ inside mount* 72 outside mount
Minimum Blind Height (inches)	24
Maximum Blind Height (inches)	72

^{*1/2&}quot; deduction is taken on all inside mount blinds.


NOTE: There is a 1" length tolerance. There may be extra slats that rest on the bottomrail.

Finished Blind Width (inches)	Number of Ladders	Number of Lifts
15 to 18	2	2
181/8 to 24	2	2
241/8 to 30	3	2
301/8 to 36	3	2
361/8 to 42	4	4
421/8 to 48	4	4
481/8 to 54	5	4
541/8 to 60	5	4
601/8 to 66	6	4
661/4 to 72	6	4


NOTE: On all inside mount blinds, take deduction BEFORE determining ladder and lift quantity.

Valance Options

- · Available at no additional charge
- Special valance width available up to 108" without returns or 106½" with returns
- ½" to 3½" returns available on outside mount (2¾" default)
- 1/2" to 11/4" returns available on inside mount (1/2" default)



November 2019 Graber Foundations | 3

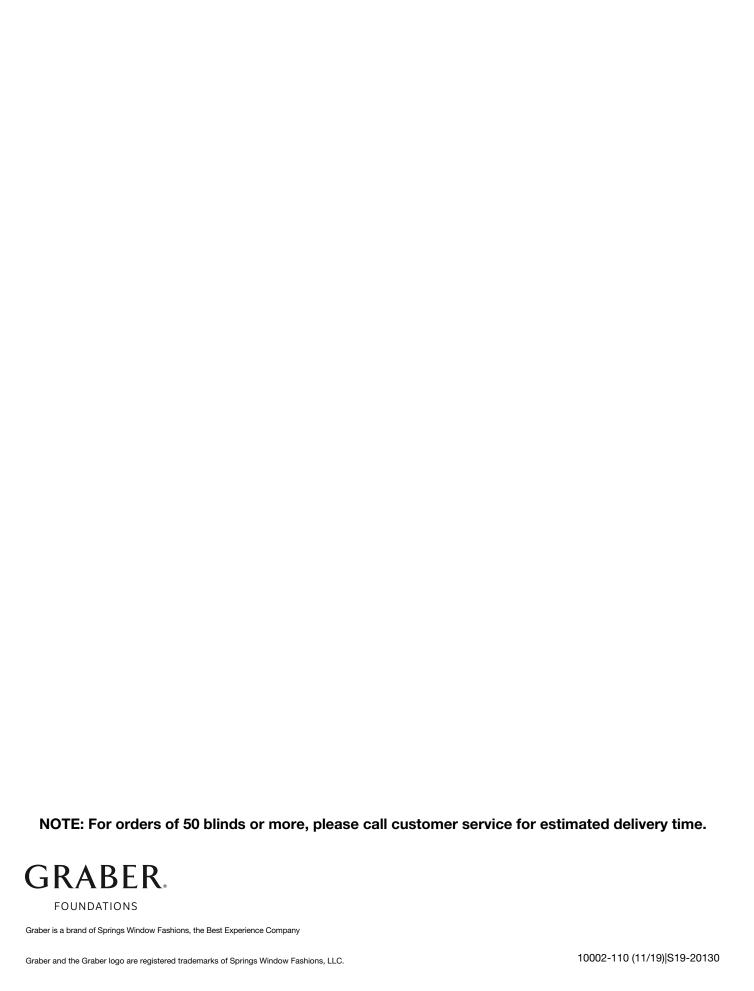

CORDLESS FAUX WOOD BLINDS

Product Information Guide

How to Measure	
Inside Mount	
Outside Mount Cordless Faux Wood Blinds	2
Product Detail	3
Size Considerations	3
Valance Options	3

NOTE: For orders of 50 blinds or more, please call customer service for estimated delivery time.



FOUNDATIONS

NOVEMBER 2019

How to Measure Cordless Faux Wood Blinds


Measure each window individually as size variances are common. Record width first, then height (also referred to as length) to the nearest 1/8". Measure width from left to right, height from top to bottom, using a steel tape measure. Do not use a cloth tape.

Inside Mount

Inside mount blinds are installed inside the window casing. Window casing must be at least the listed depths for inside mount blinds.

Type of Blind	Minimum Depth Mount (inches)	Depth Needed for Full Recess (inches)
Faux Wood-Headrail Only	1	2 5∕8
Faux Wood-Headrail with Standard Valance	1	3⅓
Faux Wood-Headrail with Decorative Valance	1	31/4


- 1. Measure the exact inside width of the window casing from one inside edge to the other in three different places. Record the narrowest measurement.
- Measure the exact height in three different places from top edge of opening to top of sill. Record the longest measurement.
- 3. Measure the window diagonally in two places as shown. If the two diagonal dimensions are not equal, we recommend an outside mount application for optimal function and aesthetics.
- 4. Do not take deductions. Allowances are made at the factory to ensure a perfect fit.




Outside Mount

Outside mount blinds are installed outside the window casing, covering an area larger than the window itself.

- 1. Measure the exact width to be covered. If window opening allows, overlap by at least 1½" on each side (3" total overlap) to ensure light control and privacy.
- 2. Measure the exact height to be covered, including desired overlap (typically from top edge of molding to bottom edge, or to top of sill if there is one).
- 3. The factory makes NO allowances on outside mount.



Cordless Faux Wood Blinds

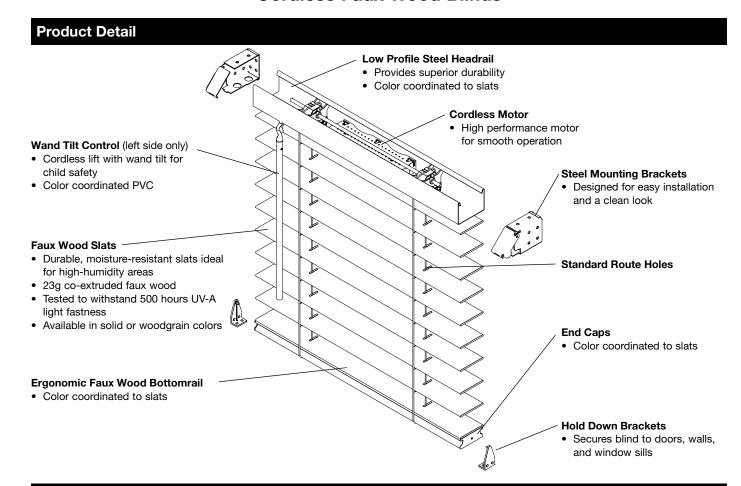

Size Considerations

Minimum Blind Width (inches)	15½ inside mount* 15 outside mount
Maximum Blind Width (inches)	72½ inside mount* 72 outside mount
Minimum Blind Height (inches)	24
Maximum Blind Height (inches)	72

^{*1/2&}quot; deduction is taken on all inside mount blinds.


NOTE: There is a 1" length tolerance. There may be extra slats that rest on the bottomrail.

Finished Blind Width (inches)	Number of Ladders	Number of Lifts
15 to 18	2	2
181/8 to 24	2	2
241/8 to 30	3	2
301/8 to 36	3	2
361/8 to 42	4	4
421/8 to 48	4	4
481/8 to 54	5	4
541/8 to 60	5	4
601/8 to 66	6	4
661/4 to 72	6	4


NOTE: On all inside mount blinds, take deduction BEFORE determining ladder and lift quantity.

Valance Options

- · Available at no additional charge
- Special valance width available up to 108" without returns or 106½" with returns
- ½" to 3½" returns available on outside mount (2¾" default)
- 1/2" to 11/4" returns available on inside mount (1/2" default)



November 2019 Graber Foundations | 3

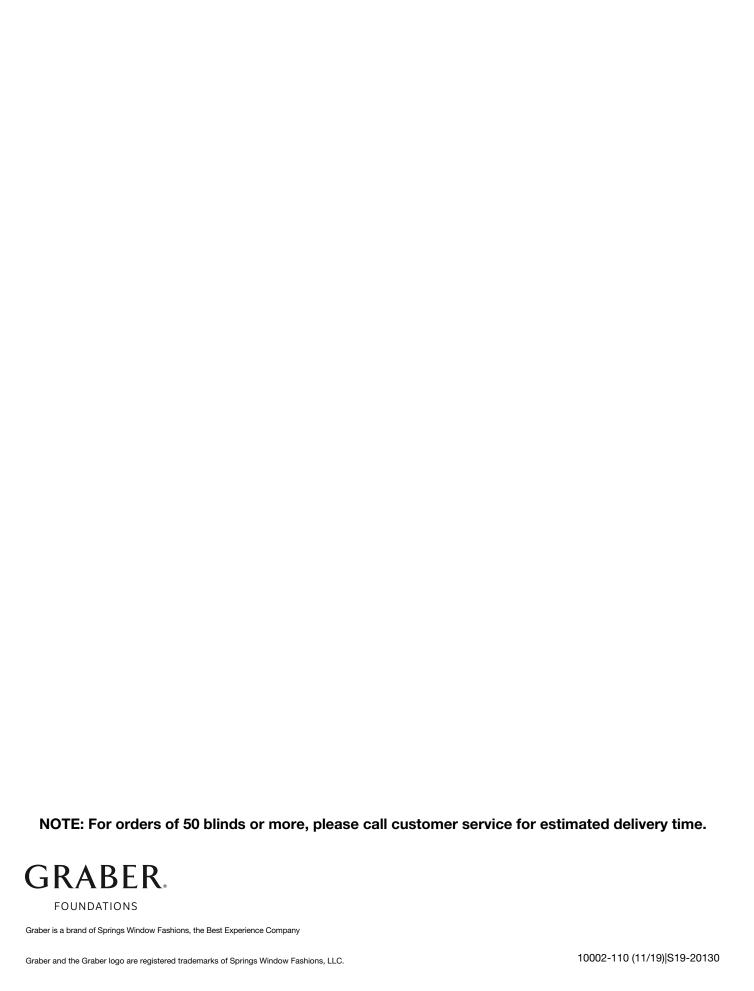

GRABER.

Graber Foundations Cordless Faux Wood Blinds

Designer US List — Effective June 2023

Price Chart: So	olid 2	2" (5.1	l cm) l	aux V	Vood								
	V	Vidth up t	o inches (cn	1) →									
Height up to	0	24	30	36	42	48	54	60	66	72	84	96	108
inches (cm)) ↓	(61)	(76.2)	(91.5)	(106.7)	(122)	(137.2)	(152.4)	(167.7)	(182.9)	(213.4)	(243.9)	(274.3)
30 (76.2)		104	120	137	146	158	172	200	215	229			
36 (91.5)		109	127	146	155	166	188	215	228	253			
42 (106.7)		118	140	155	165	185	201	229	249	271			
48 (122)		125	147	163	179	195	215	245	266	292			
54 (137.2)		137	160	182	196	215	237	271	292	315			
60 (152.4)		146	170	193	210	227	252	289	308	337			
66 (167.7)		154	182	203	221	242	267	307	330	363			
72 (182.9)		162	191	219	236	260	285	330	353	384			
Replacement Valan	ce Pri	cing											
Replacement Valanc	:e	16	19	22	25	28	31	34	37	40	48	60	80

Colors				
Coconut	C630	Milky Way	C058	

	Width up t	o inches (cn	1) →									
Height up to	24	30	36	42	48	54	60	66	72	84	96	108
inches (cm) ↓	(61)	(76.2)	(91.5)	(106.7)	(122)	(137.2)	(152.4)	(167.7)	(182.9)	(213.4)	(243.9)	(274.3
30 (76.2)	124	145	163	176	189	208	240	257	275			
36 (91.5)	130	153	175	187	200	225	257	273	302			
42 (106.7)	142	166	186	198	222	242	274	299	326			
48 (122)	149	179	195	214	235	258	294	318	349			
54 (137.2)	163	191	218	236	258	285	326	349	379			
60 (152.4)	176	204	231	253	272	301	345	372	404			
66 (167.7)	185	217	245	265	292	320	370	394	437			
72 (182.9)	194	229	263	284	310	342	394	422	462			

Colors					
Ashwood Grey	C230	Golden Wheat	C710	Modern Walnut	C012

Updated: 5/24/2023