

# **NORMAN®**

SHUTTERS. BLINDS. SHADES.

# SMARTPRIVACY® NORMANDY® WOODBLINDS

# Normandy® Wood Blinds

# Revision Log



Date	Revision
7/1/2020	Pg. 9, 25: Removed "at gaps between blinds" keystone option
7/15/2020	General Program Updates: Side Mount Brackets are available for Cordless and Corded Normandy Wood blinds. Extended max Normandy corded blind height from 96" to 118".  Pg. 7, 20: Added 37" min width for side mount brackets Pg. 7: Add optional 47 ¼" wand drop for cordless blinds Pg. 9: Updated min gap width between cordless blinds under a common valance Pg. 20: Updated 118" max height for corded blinds. Updated corded blind tolerance Pg.21: Added 47 ¼" wand drop notes for corded blinds Pg.22: Added common valance note for corded blinds with cord tilt Pg. 36: Updated cheat sheet
8/6/2020	Pg. 29: Updated SmartRelease drawing with new safety tension device
9/1/2020	Pg. 35: Discontinued 2 OSMO colors: 1107 Oak Antique, 1401 Mahogany Added 2 OSMO colors:1112 Sunbleached Gray, 1114 Weathered Gray Updated natural stain disclaimer
Effective 1/1/2021	General Program Updates: New G3 SmartRelease™ system upgrade allows for a larger size range and features a matching wood fascia insert.  Pg. 29~34: Updated SmartRelease™ with G3 specifications Pg. 36: Updated cheat sheet
2/21/2021	Pg. 7, 20: Updated measuring notes Pg. 10, 28: Added valance return notes

# Normandy® Wood Blinds

# Table of Contents 🔗



	Page
Features & Benefits	4
Performance Cordless Normandy® Blinds	
Terminology	5
Standard Features & Options	6
General Specifications	7 – 11
Mounting Depth Requirements	12 – 13
Operating your Cordless Blind	14
Corded Normandy® Blinds	
Terminology	15 – 18
Standard Features & Options	19
General Specifications	20 - 27
Mounting Depth Requirements	28
SmartRelease <sup>™</sup> Normandy® Blinds	
Terminology	29
Standard Features & Options	30
General Specifications	31 – 32
Mounting Depth Requirements	33
Installation Hardware and Parts	34
Color Availability	35
Normandy Cheat Sheet	36

# Normandy® Wood Blinds

## **Features & Benefits**

- Environmentally-friendly, premium solid wood slats to resist warping, cupping or twisting
- Textured grain finish highlights the natural characteristic of the wood
- 38 colors and finishes, including new OSMO
- 2" slats and 2 ½" slats available for all colors and systems
- Patented, award-winning SmartPrivacy® feature allows optimum blind closure for the utmost

## levels of privacy


- Light weight slat enables easier lifting and lowering
- Advanced tilting mechanism makes angling blinds effortless
- Innovative Insta-Lock™ system locks blinds at tighter horizontal intervals with ease
- Locking mechanisms minimize cord fray for lasting enjoyment
- Lift Systems
  - Cordless
  - Standard Wand Tilt | Optional Cord Tilt
  - SmartRelease<sup>™</sup>
- Smooth Performance cordless lift system comes standard for child and pet safety



SmartRelease™ decorative headrail is valance-free and comes with a facia insert that

matches the blind.

# Terminology

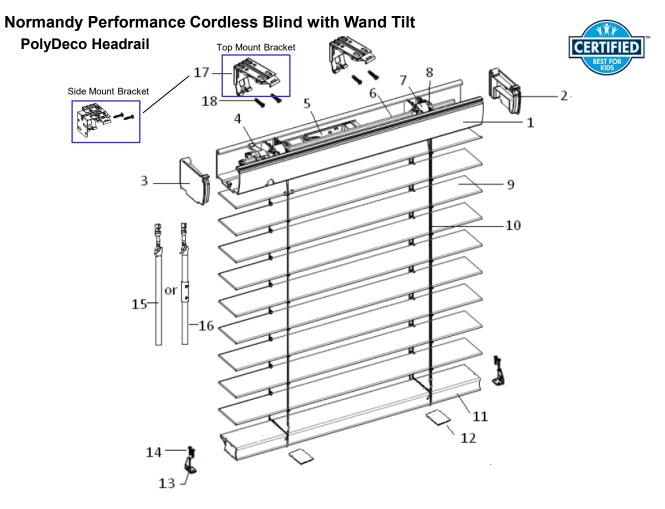

Description					
1	PolyDeco Head Rail	10	Ladder Cord		
2	Head Rail End Cap(Right)	11	Bottom Rail		
3	Head Rail End Cap(Left)	12	Bottom Rail Cap		
4	Wand Tilter	13	Hold Down Bracket (Optional)		
5	Spring Box	14	3/4" Screw (For Hold down bracket)		
6	Tilt rod	15	Wood Wand		
7	Drum	16	Split Wood Wand		
8	Drum Support	17	Installation Brackets		
9	Slat	18	1 1/4" Screw (For Installation bracket)		



## **Standard Features & Options**

#### **Standard Features**

- Award winning SmartPrivacy<sup>®</sup> seals light gaps with slat-to-slat coverage
- Smooth, reliable Performance cordless lift system. Wand tilt for child and pet safety



- Environmentally-friendly, premium solid wood slats to resist warping, cupping or twisting
   Covers a large range of sizes
- 2" & 2 1/2" slat sizes available in all colors
- · Impact resistant, modern, valance-free PolyDeco headrail
- · Engineered trapezoid bottom rail allows for easy grasping

## **Options**

- · Optional Control Location Wand: Right
- · Optional Wand drop sizes
- · Valances: Designer Crown, Crown, Modern, Contempo
- Keystones
- Common valance
- Cut-outs
- · Side mount brackets



\*For Common Valance: 3/8" width deductions will be taken for

under a common valance- which are larger deductions than a

shared window opening. For orders where blinds are under a

common valance share one window opening, please specify in

OM recommendation: Add 1 ½ width on each side of the blind.

IM common valance blinds with individual window openings

## **General Specifications**

#### Size Considerations

Single blind	Min.	Max.	Max SQFT
Blind Width (Net)	16 1/2"	96" (Top Mount) 37" (Side Mount)	48sqft * (Top Mount)
Blind Height	24"	96"	24.6 sqft (Side Mount)

- The overall max blind size is limited by the maximum area; max width by max height cannot be ordered as one blind.

special instructions.

- Side Mount bracket is available for single blinds less than or equal to 37" in width.

### **Standard Deductions**

#### Inside Mount:

Blind Width= Ordered Width – 3/8" \*
Blind Height= Ordered Height – 1/16"

#### **Outside Mount:**

Ordered Width = Blind Width Ordered Height= Blind Height

#### Tolerance:

Blind Width may vary  $\pm$  1/8".

Blind Height may vary  $+0\sim1$   $\frac{3}{4}$ " for 2" blinds, and  $+0\sim2$   $\frac{1}{4}$ " for 2  $\frac{1}{2}$ " blinds.

Measurements:

Blind width: Measure from the left end to the right end of the slat.

Bling height: Lower the blind completely, then measure from the top of the headrail to the bottom of the bottom rail with slats in an open position.

## **Wand Drop Standard**

- **Wand Drop** is measured from the top of the headrail, to the bottom of the wand grip when slats are in a level opened position. Wand drop is not the height of the wand.
- Wand Control Location
  - · Left (Default)
  - · Right (Optional)
- Wand Drop Sizes: 11 ¾", 17 ¾", 29 ¾", 38 ¼" & 47 ¼" (optional only)
  - The standard wand drop size is the default size for a blind at the given height
  - Optional wand drop sizes can be selected from the 5 available

Blind Height (Y)	Blind Width (X)	Standard Wand Drop Size	Tolerance
Y≦36"		11 3/4"	
36" <y≦48"< td=""><td>All</td><td>17 3/4"</td><td>-1"~ 0"</td></y≦48"<>	All	17 3/4"	-1"~ 0"
48" <y≦72"< td=""><td></td><td>29 ¾"</td><td></td></y≦72"<>		29 ¾"	
72" <y≦96"< td=""><td>16 ½"≦X&lt;30"</td><td>38 1⁄4" *</td><td></td></y≦96"<>	16 ½"≦X<30"	38 1⁄4" *	
12 >1 \( \)	X≧30"	38 ¼"	

- 38 1/4" wand will be split only when the blind width is smaller than 30".
- 47 1/4" wand will be split only when the blind width is smaller than 35 1/2".
- All other wand sizes will be provided as one piece.



Wand Drop

<sup>\*</sup> The following wands will be split accordingly

# **General Specifications**


#### **Valances**

\*Color availability: Valance color will match slat color.


## **Default: No Valance**

## Options:


3 1/4" Designer Crown Valance

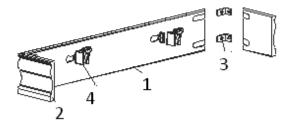


2 1/2" Contempo Valance

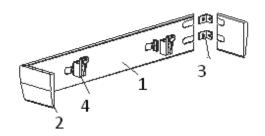


3" Contempo Valance

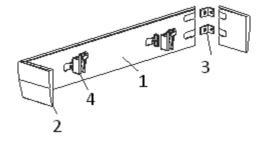

4 1/2" Crown Valance



4 1/2" Modern Valance

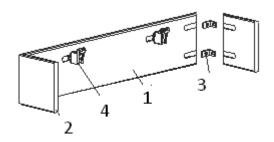

Description				
1	Valance			
2	Valance Return			
3	Valance Return Joinery			
4 Valance Clip				



## **General Specifications**

## **Valance Joinery**

Valances will be spliced when the width exceeds 96". A valance joinery is required for support on spliced valances or common valances; Valance connectors will be provided by default; keystones can be selected as an option.

- Standard: Valance Connector
  - Valance Connector splits will be made evenly along the valance; custom split location & at gaps between blinds is not available




- Optional: Keystone
  - Up to 3 keystones can be requested per valance/common valance
  - · Select the keystone location based on an even split or a custom split
  - Keystones can also be requested onto non-spliced valances.



Keystone

## **Keystone Spacing Requirements**

- Min of 18"
- Measure from the left of the valance inner width to the center of the keystone.




Keys	stone	Minimum	Maximum		
1st Ke	ystone	18"	Order Width or Custom Valance Length	and	95"
2nd Ke	eystone	18" + 1st keystone	(if applicable)		95" + 1st keystone
3rd Ke	eystone	18" + 2nd keystone			95" + 2nd keystone

#### **Common Valance**

- Gap limitations: 3/8"~12"
  - Common valances will have a minimum gap of 3/8"; a total of 12" custom gap can be requested

Please note that slats on common valance blinds may not align and that slat alignment is not guaranteed.

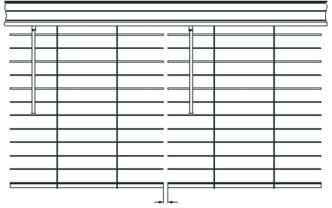

#### Standard common valance size:

- 1. For IM without valance return, the standard common valance size = window opening size-1/8"
- 2. For IM with valance return, the standard common valance size = window opening size+1/4"
- 3. For OM without valance return, the standard common valance size = window opening size+2"+1/2"\*(blind qty-1)
- 4. For OM with valance return, the standard common valance size = window opening size+1"+1/2"\*(blind qty-1)



## **General Specifications**

#### Valance & Valance Returns

- · Valance return locations: left only, right only or both left and right returns
- Standard or custom sizes available
  - Custom valance return size: minimum ½" and maximum 5"

	Blind Width	Valance Width	Minimum Mounting Depth	Valance Return
Fully IB with flush cut Designer Crown Valance - NO RETURN	Window Width – 3/8"	Blind width + 1/4"	4 1/16"	
Semi-IB with bracket flush against the wall	Window Width – 3/8"	Blind width +5/8"	2 7/8"	³¼" (inner dimension)
Semi-IB	Window Width – 3/8"	Blind width + 5/8"	1 5/8"	2" (inner dimension)
OB with valance & valance returns	Ordered Width	Blind width + 1"	NA	3 9/16" (inner dimension)

Valance Clip QTY			
Blind Width (Net) (X)	# of Ladders		
X≦37"	2		
37" <x<60"< td=""><td>3</td></x<60"<>	3		
60"≦X≦96"	4		

Valance Return Connector QTY		
For all valance types	4	

## **Ladder and Inner Cord Standard**

2" Slats				
Blind Width (Net) (X)	# of Ladders	# of Inner Cords		
16.5"≦X≦32"	2	4		
32" < X≦54"	3	5		
54" < X≦78"	4	4		
78" < X≦96"	5	5		

2 1/2" Slats				
Blind Width (Net)(X)	# of Ladders	# of Inner Cords		
16.5"≦X≦36.5"	2	4		
36.5" < X≦54"	3	5		
54" < X≦75"	4	4		
75" < X≦96"	5	5		

# **Mounting Depth Requirements**

#### **Cut-outs**

A cut-out is a blind with an area removed from it to avoid an existing obstruction. Please provide detailed measurements of the area to be removed, which should include:

\*Cut-out width

\*Cut-out height

Please note that the cut-out will be made when slats are at a closed position based on the cut out size provided. We **recommended** providing a diagram with the cut-out measurements to ensure a perfect fit to your window.






Diagram Example

Cut-out Location	Blind Width (Net)	Min cut out size on Width (E)	Max. cut out size on Width (E)	Remarks		
Bottom Corner Left/Bottom Corner Right/Bottom Both Corners	16.5" ≦ X ≦ 18"	1/8"			3" ×	×
(including cutting bottom rail)	18" <x 96"<="" td="" ≦=""><td>5"</td><td>F F</td></x>		5"	F F		
Left Side/Right Side/ Both Sides	16.5"≦ X≦18"		3"	×		
(not cutting bottom rail)	18" < X ≦ 96"		5"			

## **General Specifications**

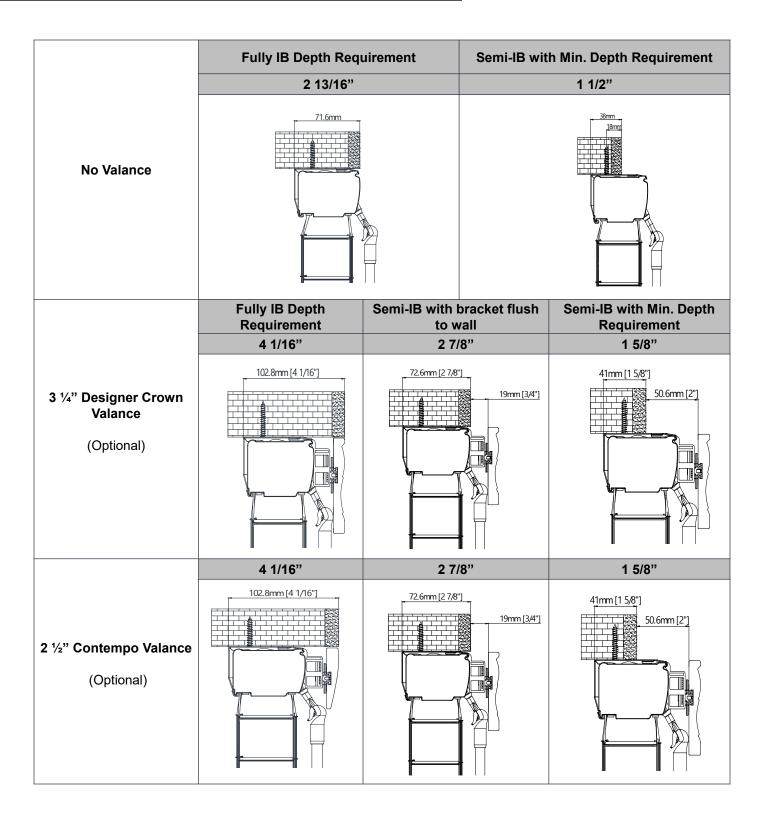


## **General Specifications**

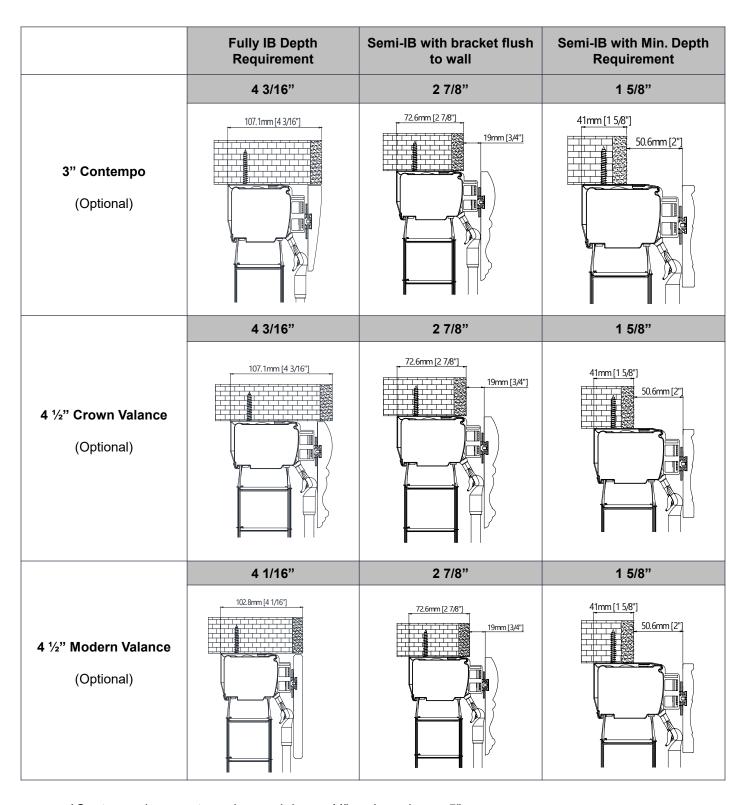


<sup>\*</sup>Custom valance return sizes: minimum ½" and maximum 5"

# **Operating Your Cordless Blind**

**Tilting Wand:** Rotate the wand to achieve the desired slat position.




**To lower the blind:** Pull the blind down, by hand, from the bottom rail. Slats can be in an opened or closed position when lowering the blind.




**To raise the blind:** Gently tilt the slats toward you at a 45 degree angle before lifting the bottom rail. Lift by hand, with slats in an open position.

\*Do not leave slats in a closed up or closed down position while lifting the bottom rail.

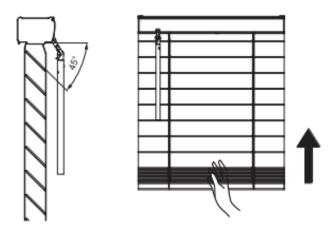

# **Terminology**


# Normandy Corded Blind - Wand Tilt, Lift Cord (Standard) Polydeco Headrail

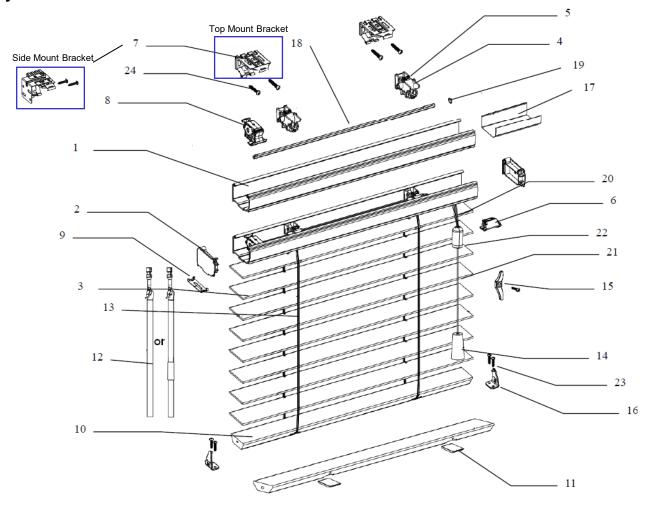

	Description								
1	Polydeco Headrail	9	Slat Clip	17	Headrail Insert				
2	Headrail End Cap	10	Trapezoid Bottom Rail	18	Shaft				
3	Slat	11	Bottom Rail Cap	19	Ring Stopper				
4	Drum Support	12	(Tilt) Wand	20	Lift Cord				
5	Drum	13	Ladder Cords	21	Tassel Cord				
6	Insta-Lock®	14	Tassel	22	Cord Release device				
7	Installation Brackets	15	Cord Cleat	23	3/4" Screw (For Hold-Down Bracket)				
8	Wand Tilter	16	Hold-Down Bracket (Optional)	24	1/4" Screw (For Installation Bracket)				

# **Terminology**

# Normandy Corded Blind - Cord Tilt, Lift Cord (Optional) Polydeco Headrail

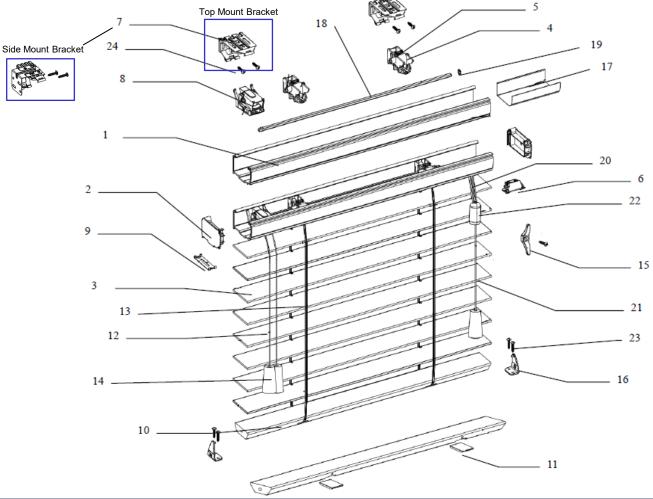


	Description								
1	Polydeco Headrail	9	Slat Clip	17	Headrail Insert				
2	Headrail End Cap	10	Trapezoid Bottom Rail	18	Shaft				
3	Slat	11	Bottom Rail Cap	19	Ring Stopper				
4	Drum Support	12	(Tilt) Cord	20	Lift Cord				
5	Drum	13	Ladder Cords	21	Tassel Cord				
6	Insta-Lock®	14	Tassel	22	Cord Release device				
7	Installation Bracket	15	Cord Cleat	23	3/4" Screw (For Hold-Down Bracket)				
8	Wand Tilter	16	Hold-Down Bracket (Optional)	24	1/4" Screw (For Installation Bracket)				

# **Terminology**

# Normandy Corded Blind, Regular Route Hole with Cloth Tape – Wand Tilt


Polydeco Headrail

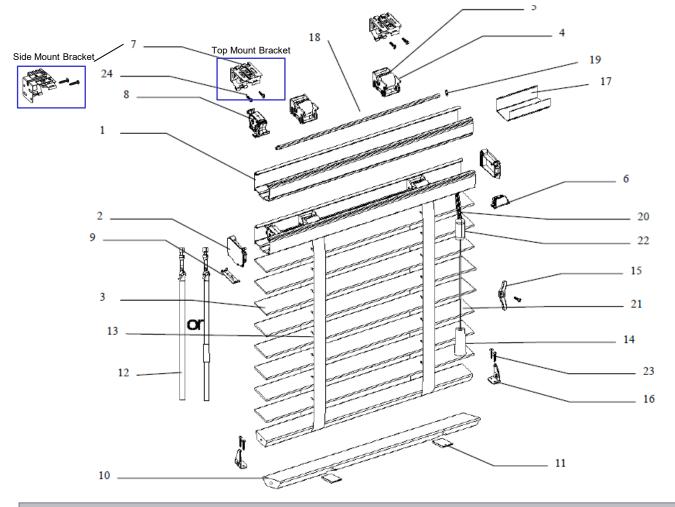

	Description								
1	Polydeco Headrail	9	Slat Clip	17	Headrail Insert				
2	Headrail End Cap	10	Trapezoid Bottom Rail	18	Shaft				
3	Slat	11	Bottom Rail Cap	19	Ring Stopper				
4	Drum Support	12	(Tilt) Wand	20	Lift Cord				
5	Drum	13	Cloth Tape	21	Tassel Cord				
6	Insta-Lock <sup>®</sup>	14	Tassel	22	Cord Release device				
7	Installation Bracket	15	Cord Cleat	23	3/4" Screw (For Hold-Down Bracket)				
8	Wand Tilter	16	Hold-Down Bracket (Optional)	24	1/4" Screw (For Installation Bracket)				

# **Terminology**

# Normandy Corded Blind, Regular Route Hole with Cloth Tape – Cord Tilt Polydeco Headrail

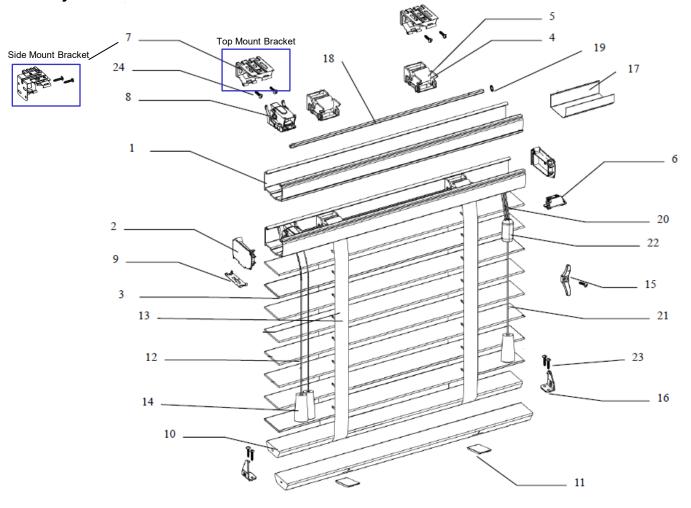

	Description								
1	Polydeco Headrail	9	Slat Clip	17	Headrail Insert				
2	Headrail End Cap	10	Trapezoid Bottom Rail	18	Shaft				
3	Slat	11	Bottom Rail Cap	19	Ring Stopper				
4	Drum Support	12	(Tilt) Cord	20	Lift Cord				
5	Drum	13	Cloth Tape	21	Tassel Cord				
6	Insta-Lock®	14	Tassel	22	Cord Release device				
7	Installation Bracket	15	Cord Cleat 23 3/4" Screw (For Hold		3/4" Screw (For Hold-Down Bracket)				
8	Wand Tilter	16	Hold-Down Bracket (Optional)	24	1/4" Screw (For Installation Bracket)				

## **Standard Features & Options**

#### Standard Features

- Award winning SmartPrivacy® seals light gaps with slat-to-slat coverage
- 2" & 2 ½" slat sizes available in all colors
- · Premium quarter sawn wood slats
- Impact resistant, modern, valance-free Polydeco headrail
- Engineered trapezoid bottom rail for tightest closure in its category
- · Covers a wide range of sizes
- 1" cloth tape ladder for regular routed blinds
- Standard Wand Tilt system

## **Options**

- Optional Valances & Common Valances
- Optional Cord-Tilt system
- · Optional Control Locations
  - · Reverse, Group Left or Group Right
- · Optional wand drop sizes & custom cord drop sizes
- · Over 20 cloth tape designs
- Valance Returns
- Keystones
- Cut-outs
- Side mount brackets









# General Specifications

#### **Size Limitations**

			Wand Tilt		Cord Tilt			
Mount Type	Blind Size	Min	Max	Sqft	Min	Max	Sqft	
Top Mount	Width (Net)	6 ½"	96"	42 oaft	6 ½"	96"	0.4	
Brackets	Height	25 ½" *	118"	Sqft Min Max  42 sqft 6 ½" 96"  50 ½" 118"  6 ½" 37"	64 sqft			
Side Mount Brackets	Width (Net)	6 ½"	37"	20.2 caft	6 ½"	37"	00.0	
	Height	25 ½" *	118"	SU.S SQIL	50 ½" *	118"	30.3 sqft	

- The overall max blind size is limited by the maximum area; max width by max height cannot be ordered as one blind.
- Side Mount bracket is available for single blinds less than or equal to 37" in width.

## \* Custom Blind Drop:

- Wand Tilt has a standard min. blind length of 25 ½", but a custom blind length of at least 10" is available when a custom cord drop is first selected.
- Cord Tilt has a standard min. blind length of 50 ½", but a custom blind length of at least 10" is available when a custom cord drop is first selected.

#### Standard Deductions

#### **Inside Mount:**

Blind Width = Order width -3/8" Blind Height = Order Width -1/16"

#### Outside Mount:

No Deductions. Blind Width = Order width

Recommendation: Add 1 1/2 width on each side of the blind.

#### Tolerance:

Blind Width may vary ±1/8"

Blind height may vary 0"~1 3/4" for 2" blinds; 0"~2 1/4" for 2.5" blinds

#### Measurements:

Blind width: Measure from the left end to the right end of the slat.

Bling height: Lower the blind completely, then measure from the top of the headrail to the

bottom of the bottom rail with slats in an open position.

## **Hardware Components**

Valance type	Valance Return Connector qty
2 ½" Contempo	2 or 4
All other valances	4

Blind Width	Valance Clip qty
X≦36 1/2"	2
36 1/2" < X≦54"	3
54" <x≦96"< td=""><td>4</td></x≦96"<>	4



# **General Specifications**

## **Wand Tilt Corded Blind Configurations**

## **Wand Standard**

- **Wand Drop** is measured from the top of the headrail, to the bottom of the wand grip when slats are in a level opened position. Wand drop is not the height of the wand.
- · Wand Drop Sizes:
  - Standard or Optional; 11 ¾", 17 ¾", 29 ¾", 38 ¼", & 47 ¼"
  - The standard wand drop size is the default size for a blind at the given height. However, any of the optional sizes can be selected for any blind size.


	5.1. 1.14 <i>1</i> 1.11	Wand	Drop	Lift Cord Drop		
Blind Height (Y)	Blind Width (X)	Standard Size	Tolerance	Standard Size	Tolerance	
Y≦36"	All	11 ¾"			-1/2"~ +0"	
36" <y≦48"< td=""><td>All</td><td>17 ¾"</td><td></td><td rowspan="2">~(400/ \\V</td></y≦48"<>	All	17 ¾"		~(400/ \\V		
48" <y≦72"< td=""><td>All</td><td>29 ¾"</td><td>1"- 10"</td></y≦72"<>	All	29 ¾"	1"- 10"			
70"~\/<06"	10"≦X<30"	38 ¼" *	-1"~ +0"	(40%)1		
72" <y≦96"< td=""><td>X≧30"</td><td>38 ¼"</td><td></td><td></td><td></td></y≦96"<>	X≧30"	38 ¼"				
96" <y≦118"< td=""><td>12"≦X&lt;35 ½"</td><td>47 1/4" *</td><td></td><td></td><td></td></y≦118"<>	12"≦X<35 ½"	47 1/4" *				
90 <1 ≥110	X≧35 ½""	47 1/4"				

<sup>\*</sup> The following wands will be split accordingly

- 38 1/4" wand will be split only when the blind width is smaller than 30".
- 47 1/4" wand will be split only when the blind width is smaller than 35 1/2".
- All other wand sizes will be provided as one piece.

#### **Cord Standard**

- Cord drop is measured from the top of headrail to the bottom of the tassels, when slats are in an open position.
- Please note that, in support of the WCMA safety standards, the corded wood blinds standard size for the operating cords will be approximately 40% of the blind length. Custom cord drop is available.
- · Minimum custom cord drop: 10"

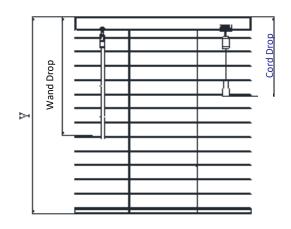


<u>Common Valance Wands/Cords:</u> For blinds under a common valance, both wands/cords will be default to the standard size on the smallest blind.

## **General Specifications**

#### **Cord Tilt**

#### Tilt & Lift Cord Drop Standards

- Cord drop is measured from the top of headrail to the bottom of the tassels, when slats are in an open position.
- Please note that, in support of the WCMA safety standards, the corded wood blinds standard size for the operating cords will be approximately 40% of the blind length. Custom cord drop is available.
- Minimum custom cord drop: 20"
- Common Valance Cords: For blinds under a common valance, all cords will default to the standard size based on the smallest blind.

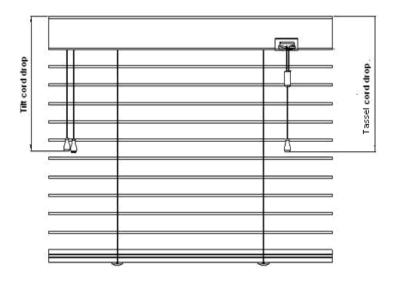

	Blind Height (Y)	Tilt Cord/Lift Cord Standard drop	Cord Drop Tolerance
Standard	Y≥50 ½"	<(40%)Y	-1/2"~ +0"

#### **Control Location for Corded Blinds**

#### Default

Tilt Wand/Cord (Left), Lift Cord (Right)

#### Optional

- Reverse: Tilt Wand/Cord (Right), Lift Cord (Left)
- Group Left: Tilt Wand/Cord (Left), Lift Cord (Left)
- **Group Right**: Tilt Wand/Cord (Right), Lift Cord(Right)

#### **Control Location for Smaller Blinds**

Blinds under 12" (W) will be center tilt, with no lift cord. Center tilt is <u>only</u> available when the blind width is less than 12". Optional control location is not available for smaller blinds.

Blind width	Wand Tilt Blind	Cord Tilt Blind
6.5"≦Blind Width<12"	Center Wand Tilt, NO Lift	Center Cord Tilt*, NO Lift



## **General Specifications**

#### **Ladder and Pull Cords**

	Ladder & Pull Cords					Ladder & Pull Cords				
	Smart	SmartPrivacy Regular Route Hole				Smarti	Privacy	Regular Route Hole		
Blind Width	Blind Width 2" Slat				Blind Width	2 ½" Slat				
	# of Ladders	# of Pull Cords	# of # of Pull Ladders Cords		# of Ladders	# of Pull Cords	# of Ladders	# of Pull Cords		
6 1/2"≦X < 12"	2	2	2	2	6 1/2"≦X < 12"	2	2	2	2	
12"≦X≦32"	2	4	2	2	12"≦X≦36 1/2"	2	4	2	2	
32" < X≦54"	3	5	3	3	36 1/2" < X≦54"	3	5	3	3	
54" < X≦78"	4	4	4	4	54" < X≦75"	4	4	4	4	
78" < X≦96"	5	5	5	5	75" < X≦96"	5	5	5	5	

## **Cloth Tape for Regular Routed Blinds**

- · Regular routed blinds come standard with a cloth tape ladder
- · Cloth tape colors must be selected; there is no default color coordination

NO.	Color Code	Color Name	Туре	NO.	Color Code	Color Name	Туре
1	T001A	White		12	T303A	Dark Mulberry	
2	T403A	Ecru		13	T402A	Light Cocoa	
3	T002A	lvory		14	5434A	Dark Sienna	Solid Cloth Tape
4	T003A	Bone		15	5462A	Black Brown	
5	5507A	Natural	0-1:-1-01-41-	16	T201A	Black	
6	T169A	Gray Beige	Solid Cloth Tape	17	T108	Cream Foliage	
7	5124A	Dusty Gray	iap <del>e</del>	18	T112	Zebra	
8	T501A	Wheat		19	T115	Egyptian	Decorative
9	5416A	Chocolate		20	T116	Olive Aztec	Tape*
10	T401A	Cherry		21	T117	Ochre Aztec	
11	5414A	Brown		22	T118	Ebony Aztec	

\*Decorative Tape will only appear on the front of the ladder. The back will be a solid color: **T002A lvory** 





## **General Specifications**


## **Valance Options**

\*Color availability: Valance color will match slat color.


Default: No Valance

Options:


3 1/4" Designer Crown Valance

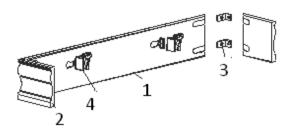

3" Contempo Valance

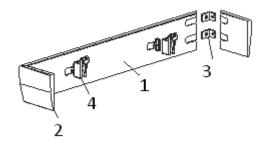


4 1/2" Modern Valance

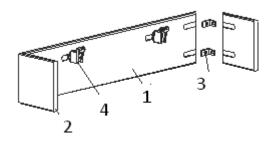


Description
1 Valance
2 Valance Return
3 Valance Return Joinery
4 Valance Clip

2 1/2" Contempo Valance

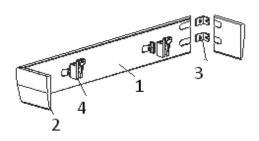

4 1/2" Crown Valance



## **General Specifications**

## **Valance Joinery**

Valances will be spliced when the width exceeds 96". A valance joinery is required for support on spliced valances or common valances; Valance connectors will be provided by default; keystones can be selected as an option.

- Standard: Valance Connector
  - Valance Connector splits will be made evenly along the valance; custom split location & at gaps between blinds is not available



Valance Connector

- Optional: Keystone
  - Up to 3 keystones can be requested per valance/common valance
  - · Select the keystone location based on an even split or a custom split
  - Keystones can also be requested onto non-spliced valances.




Keystone

## **Keystone Spacing Requirements**

- Min of 18"
- Measure from the left of the valance inner width to the center of the keystone.

Keystone	Minimum	Maximum		
1st Keystone	18"	Order Width or Custom	and	95"
2nd Keystone	18" + 1st keystone	Valance Length (if applicable)		95" + 1st keystone
3rd Keystone	18" + 2nd keystone			95" + 2nd keystone

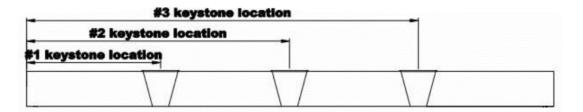

## **General Specifications**

# Common Valance

Please note that slats on common valance blinds may not align and that slat alignment is not guaranteed.

- Up to 4 blinds can be ordered under one common valance.
- Each blind will have a 3/8" deduction taken to ensure the blind will fit.
- Common Valance order width is <u>custom</u> and must be specified. Calculate your width based on the following:
  - IM valance measurements (with or without returns) will be max frame to frame, no deductions will be taken. Please take your own deductions to ensure the valance will fit.
  - IM valances without returns should add 1/4" to cover deductions:

Valance Width = (Left blind width) + gap + (Right blind width) + 1/4"

• IM with returns should add 5/8" to cover blind deductions :


Valance Width = (Left blind width) + gap + (Right blind width) + 5/8"

OM valances with returns should overlap the blinds by a total of 1"

Valance Width = (Left blind width) + gap + (Right blind width) + 1"

- OM valance without returns should overlap the blinds by a total of 2"
   Valance Width = (Left blind width) + gap + (Right blind width) + 2"
- **Gaps**: Gaps for Corded blinds must be at least  $\frac{1}{4}$ ", up to 12". If the gaps between each blind are larger than  $\frac{1}{4}$ ", calculate the total gap and include in your common valance order width

## **Valance Return Widths**

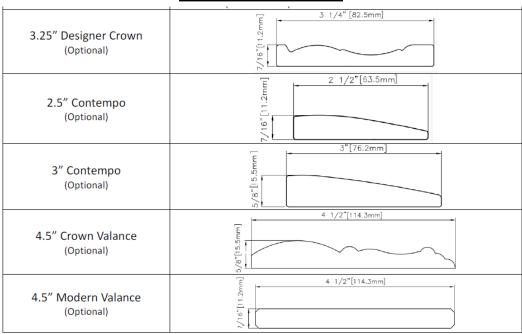

# **General Specifications**


#### **Cut-out**

A cut-out is a blind with an area removed from it to avoid an existing obstruction. Please provide detailed measurements of the area to be removed, which should include:


\*Cut-out width

\*Cut-out height

Please note that the cut-out will be made when slats are at a closed position based on the cut out size provided. We **recommended** providing a diagram with the cut-out measurements to ensure a perfect fit to your window.







Cut-out Location	Blind Width (X)	Min cut-out width (E)	Max cut-out width (E)	Min cut-out height (F)	Max cut-out height (F)	Diagram
Bottom Left Corner / Bottom Right Corner /	6.5"≤X<12"		1/2"			X
Both Bottom Corners  (cut-out on the bottom rail and the bottom section of the slats)	12"≦ X≦18"	1/8"	2"	2" blind: 1 ½" 2 ½" blind:	1 ½"	_E
	18" <x≦96< td=""><td>4 ½"'</td><td>ш</td></x≦96<>		4 ½"'			ш
Left Side / Right Side / Both Sides (cut-out on the middle drop	6.5≤X<12"		1/2"	2 /2 billiu. 2"	1 – 2	×
	12"≦ X≦18"		2"			<u>E</u>
section of the slats)	18" <x≦96< td=""><td></td><td>4 1/2"</td><td></td><td></td><td></td></x≦96<>		4 1/2"			



## **Mounting Depth Requirements**

## Minimum mounting Depth and Valance Return Sizes

- · Valance return locations: left only, right only or both left and right returns
- Standard or custom sizes available
  - Custom valance return size: minimum ½" and maximum 5"

#### Inside mount - Wand Tilt and Cord Tilt Corded Blinds

Blind/Valance Type	Fully Recessed IB (no returns)	Semi-IB with Standard 3/4" return	Semi-IB Minimum Mounting Depth (custom return)
2" & 2 ½" Blind with No Valance	2 11/16"	N/A	1 5/8"
2" & 2 ½" Blind with 2.5" Contempo Valance	3 7/8"	2 11/16" *Valance return size: 3/4"	1 5/8" *Valance return size: 1 13/16"
2" & 2 ½" Blind with 3" Contempo Valance	4 /16"	2 11/16" *Valance return size: 3/4"	1 5/8" *Valance return size: 1 13/16"
2" & 2 ½" Blind with 3.25" Designer Crown Valance	3 7/8"	2 11/16" *Valance return size: 3/4"	1 5/8" *Valance return size: 1 13/16"
2" & 2 ½" Blind with 4.5" Crown Valance	4 /16"	2 11/16" *Valance return size: 3/4"	1 5/8" *Valance return size: 1 13/16"
2" & 2 ½" Blind with 4.5" Modern Valance	3 7/8"	2 11/16" *Valance return size: 3/4"	1 5/8" *Valance return size: 1 13/16"
2" & 2 ½" Blind with Designer Crown Valance	3 7/8"	2 11/16" *Valance return size: 3/4"	1 5/8" *Valance return size: 1 13/16"

## **Outside Mount - Wand Tilt and Cord Tilt Corded Blinds**

Valance Return Size						
Slat Size	Mounting Type	Valance Type	Valance Return Size (inner dimension)			
2" & 2 ½"	Outside Mount	3 1/4" Designer Crown 2 1/2" Contempo 4 ½" Modern Valance 4 ½" Crown Valance & 3" Contempo	3 7/16"			




# SmartPrivacy<sup>®</sup> Normandy<sup>®</sup> SmartRelease<sup>™</sup> Wood Blinds

# **Terminology**

Normandy Wood Blind - G3 SmartRelease™

## **Aluminum Headrail**

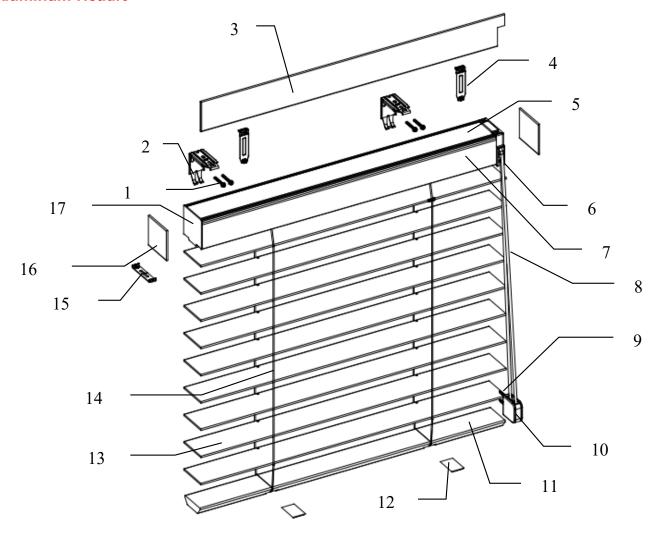

NO.	Description	NO.	Description	NO.	Description
1	Screws for Installation Bracket	7	Headrail (aluminium)	13	Slat
2	Installation Bracket	8	Cord Loop Cord	14	Ladder Cord
3	Wood Fascia	9	Screw for Tension Device	15	Slat Clip
4	Fascia Clip	10	Safety Tension Device	16	Headrail End Cap Fascia
5	Dust Cover	11	Bottom Rail	17	Headrail End Cap
6	Cord Loop Control Assembly	12	Bottom Rail Cap		

# Normandy® SmartRelease™ Wood Blinds

# **Standard Features & Options**

#### **Standard Features**

- Award winning SmartPrivacy® seals light gaps with slat-to-slat coverage
- 2" & 2 1/2" slat sizes available in all colors, including new OSMO
- Decorative, valance-free, aluminum headrail featuring a wood fascia that matches the blind for a rich custom look.
- Convenient SmartRelease™ system that drops entire blind down with the ease of just one simple pull
- New G3 SmartRelease™ system touch and stop feature-- quietly lowers the blind with a single pull of the cord and automatically stops lowering when it hits any obstructions.
- Engineered trapezoid bottom rail for tightest closure in its category
- · Built-in light block for extra privacy and added light control

## **Options**

- Control Options: Right (default), Left (optional)
- Cut-out

# Normandy® SmartRelease™ Wood Blinds



## **General Specifications**

#### **Size Limitations**

	Min	Max	Max Area
Width (Net)	20 ½"	96"	06 oaft
Length	10"	144"	96 sqft

#### **Standard Deductions**

#### Inside Mount:

Blind Width (Net) = Order width -3/8" Blind Height = Order height -1/16"

#### **Outside Mount:**

No Deductions. Blind Width (Net) = Order width

#### Tolerance:

Blind Width (Net) may vary ±1/8" Blind Height may vary -1/8", + 3/8"

#### Order measurement:

Blind width = slat width

Blind height = Measurement from the top edge of the headrail to bottom edge of bottom rail, with slats in an open position.

#### **Control Position**

Cord Loop/Cord	Default	Optional
Tensioner	Right	Left

# **Cord Loop Drop Standard**

Blind Drop (Y)	Cord Loop Cord Drop (Y2)
Y≤30"	16"
30" <y≤42"< td=""><td>24"</td></y≤42"<>	24"
42" <y≤54"< td=""><td>36"</td></y≤54"<>	36"
54" <y≤66"< td=""><td>48"</td></y≤66"<>	48"
66" <y≤90"< td=""><td>60"</td></y≤90"<>	60"
Y>90"	84"

Custom cord loop drop is available. Minimum: 12", no max.



72


# Normandy® SmartRelease™ Wood Blinds

# **General Specifications**

#### **Cut-out**

A cut-out is an area of the blind that needs to be removed in order to avoid an existing obstruction.

- · Available for Single Blinds & Common Valance
- Normandy SmartRelease<sup>TM</sup> blinds is available in cut-out Type A only.
  - Type A: cut-out on the bottom right or bottom left corner or both
- Detailed measurements of the desired removed area must include:
  - Cut-out width (E)
  - Cut-out height (F)
  - Organic Height (H) Measuring from top of headrail down to the start of the cut-out position
  - Recommended: Please provide a diagram with marked measurements
- Cut-outs are:
  - Measured when the slats are in a closed position
  - Made on complete slats only. Partial slat cuts will not be made.

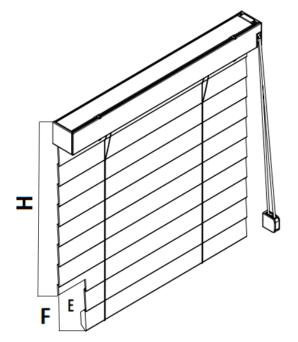


Riina wiath (NAT)	Min. cut-out Width (E)	Max. cut-out Width (E)	Min. cut-out Width (F)	Max. cut-out Width (F)	Diagram
No limit	1/8"	5"	2" blinds: 1 ¾" 2 ½" blinds: 2 3/8"	Y - 2 ½"	H Y

# **Mounting Depth Requirements**


Mounting Type	Slat Size	Mounting Depth Requirement	Drawing
Fully Inside Mount	2" & 2 ½"	2 15/16"	74.8mm[2 15/16"]
Semi - Inside Mount	2" & 2 ½"	1 5/8"	41,5mm[1 5/8"] 18mm[11/16"]

## **Installation Hardware and Parts**


Installation Bracket (For Cordless 2" & 2.5" Blind)




Installation Bracket (For Corded 2" & 2.5" Blind)



Installation Bracket (For Corded 2" & 2.5" Blind)

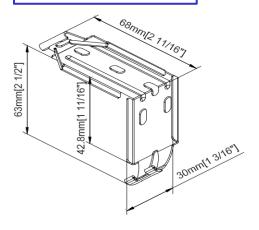


Spacer Block (Optional for OB only)





Allow a 10mm extension outward from the wall. Each bracket needs 1pc of spacer blocks at the back side. 2sets can be used to allow an 18mm extension.

Side Mount Support Bracket



Hold Down Bracket



Two sizes for 2" and 2 1/2" slats.

# **Color Availability**

Color availability for Cordless, Corded & SmartRelease Normandy wood blinds.

\*\*Slat color will match optional valance color.

No.	Color Code	Color Name	Color Type	2" Slat	2 1/2" Slat
1	ND001	Pure White	Paint	✓	✓
2	ND063	Decorators White	Paint	✓	✓
3	ND003	Silk White	Silk White Paint		✓
4	ND006	Pearl	Paint	✓	✓
5	ND012	Crisp Linen	Paint	✓	✓
6	ND019	String	Paint (Designer*)	✓	✓
7	ND080	Taupe Gray	Paint (Designer*)	✓	✓
8	ND042	Hall Grey	Paint (Designer*)	✓	✓
9	ND032	Sea Mist	Paint (Designer*)	✓	✓
10	ND075	Storm Gray	Paint (Designer*)	✓	✓
11	ND089	Chelsea Gray	Paint (Designer*)	✓	✓
12	ND049	Stone Gray	Paint (Designer*)	✓	✓
13	ND051	Brown Gray	Paint (Designer*)	✓	✓
14	ND053	Clay	Paint (Designer*)	✓	✓
15	ND110**	Limed White	Stain	✓	✓
16	ND114**	Taupe	Stain	✓	✓
17	ND108	Rustic Gray	Stain	✓	✓
18	ND220	New Ebony	Stain	✓	✓
19	ND109	Weathered Teak	Stain	✓	✓
20	ND862	French Oak	Stain	✓	✓
21	ND204	Oak Mantel	Stain	✓	✓
22	ND212	Dark Teak	Stain	✓	✓
23	ND215	Cordovan	Stain	✓	✓
24	ND211	Cherry	Stain	✓	✓
25	ND230	Old Teak	Stain	✓	✓
26	ND237	Wenge	Stain	✓	✓
27	ND221	Black Walnut	Stain	✓	✓
28	ND246	Matte Black	Stain (Designer*)	✓	✓
29	1003	White Matte	OSMO	✓	✓
30	1501	Oak	OSMO	✓	✓
31	1502	Teak	OSMO	✓	✓
32	1301	Cherry	OSMO	✓	✓
33	1109	Silk Gray	OSMO	✓	✓
34	1111	Granite Gray	OSMO	✓	✓
35	1203	Black	OSMO	✓	✓
36	1204	Ebony	OSMO	✓	✓
37	1112	Sunbleached Gray	OSMO	✓	✓
38	1114	Weathered Gray	OSMO	✓	✓

<sup>\*\*</sup> Note: ND110, ND114 and all OSMO colors have a special stain that enhances the wood grain. Therefore, the final product may appear different than the sample due to natural variations found in wood.

#### **Discontinued Colors:**

The following colors are **no longer available**. Please remove from your samples immediately.

- 1107 Oak Antique (OSMO)
- 1401 Mahogany (OSMO)



# **Cheat Sheet For Normandy Blinds**

System	Cordless		Corded				SmartRelease™	
Headrail	PolyDeco Headrail		PolyDeco Headrail				Aluminum Headrail	
	Standard		Default		Option		Standard	
Tilt System	Wand Tilter		Wand Tilter		Cord Tilter		Cord Loop	
Size Considerations	Min	Max	Min	Max	Min	Max	Min	Max
Blind Width:	16 ½"	96" 37" Top Mount Side Mount	6 ½"	96" 37" Top Mount Side Mount	6 ½"	96" 37" Top Mount Side Mount	20 ½"	96"
	24"	96"	25 ½" *	118"	50 ½" *	118"	10"	144"
Blind Height:		30						144
Max Area Limitations	Yes 48 sqft		Yes   42 sqft		Yes ₹ 64 sqft		No ✓ 96 sqft	
Side Mount Brackets	Yes √		Yes √		Yes √		No 🗴	
Control Location Option	Yes √ (Optional Wand: Right)		Yes √ (Reverse, Group Left, Group Right)		Yes √ (Reverse, Group Left, Group Right)		Yes ✓ (Left or Right)	
Control Size Options	5 Wand Sizes: 11 ¾", 17 ¾", 29 ¾", 38 ¼", 47 ¼"		5 Wand Sizes: 11 ¾", 17 ¾", 29 ¾", 38 ¼", 47 ¼" Lift Cord: Min of 10"		Both Tilt & Lift Cords: Min of 20"		Cord loop: Min of 12", no max.	
Colors	28 colors + 10 OSMO		28 colors + 10 OSMO			28 colors + 10 OSMO		
	Yes √		Yes √			No Valance ×  Matching wood fascia insert included		
Valance Options	No Valance (Default)		No Valance (Default)					
	Option: Designer Crown		Option: Designer Crown					
	Option: 2 ½" or 3"		Option: 2 ½" or 3" Contempo					
	Contempo  Option: 4 ½" Crown		Option: 4 ½" Crown					
	Option: 4 ½" Modern		Option: 4 1/2" Modern					
Cloth Tapes	No ×		Yes ✓ (with regular route hole blinds only)			No 🗴		
Common Valance/ Keystone	Yes√		Yes√			No 🗴		
2 on 1	No 🗴		No 🗴			No 🗴		
Cut Out	Yes √		Yes √			Yes√		

<sup>\*</sup> See detailed sections for more information.