

Mariak

**1" Aluminum
Mini Blinds**

January 2021

Mini Blind Measuring & Ordering Instructions

Selecting the Type of Mounting:

Determine whether the blind is going to be installed inside the window frame (IB) or outside the window frame (OB).




Inside Mount (IB):

Measuring the Width and the Length for Inside Mount:

For the width, measure across the top, middle, and bottom of the window opening. Record the narrowest dimension, measure to the nearest 1/8".

For the length, measure the up and down dimension on the left, center, and right side. Record the longest length measurement, measuring to the nearest 1/8".

Do not make any width deductions. The factory will make any appropriate deductions (1/2" standard for inside mount mini blinds).

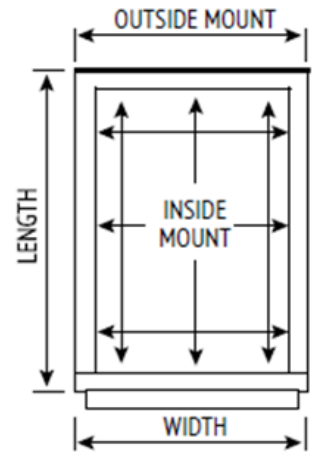

Outside Mount (OB):

Outside mount installations are mounted on the wall or on the window molding. It is best to overlap the window opening at least 1 1/2" on each side when measuring for mini blinds.

Measuring the Width and the Length for Outside Mount:

Measure the area that the blind is to cover. For mini blinds it is recommended to overlap the window opening by at least 1 1/2" on each side for a total of 3". To allow for enough space for the mounting brackets and to cover the bottom of the window, the suggested overlap for a mini blind is at least 3" (1 1/2" above the window opening and 1 1/2" below the opening). If the window opening has a sill, measure from where the top of the mini blind will be located to the top of the windowsill.

Note: When outside mount blinds are specified, no factory deductions are taken.

Confirming Measurements:

The most common error in ordering blinds is reversing the width and the length measurements. Always confirm that the width is the measurement that goes across from left to right and listed first, and that the length is the measurement that goes from top to bottom. List the width measurement first (W x L).


Mini Blind Color Listing

		Contractor 6 Gauge 1"x1" Headrail with Box Brackets	Professional 6 Gauge 1 1/2" x 1" Headrail with Hidden Brackets	
		Corded	Corded	Cordless
005	White Gloss	X	X	X
006	Raw Umber	X	X	Not Available
011	Beige	X	X	X
026	Smokey Grey	X	X	Not Available
034	Textured Aluminum	X	X	X
042	Matte White	X	X	X
060	Nut Brown	X	X	Not Available
062	Char Brown	X	X	X
065	Almost Gloss White	X	X	X
089	True Blue	X	X	X
100	Vanilla	X	X	Not Available
175	Taupe	X	X	Not Available
112	Alabaster	X	X	X
121	Brushed Aluminum	X	X	X
154	Hunter Green	Not Available	X	X
205	White Satin	X	X	X
233	Black Satin	X	X	X
376	Navajo	X	X	X
386	Snow Cap	X	X	X
496	Cream White	X	Not Available	Not Available
541	Almond	X	X	X
544	True White	X	X	X
625	Dune	X	X	X
629	Snow Crystal	X	X	X
630	Yellow White	X	X	X
653	Garnet Red	X	X	X
747	Grey	X	X	X
749	Mineral Grey	X	X	X
963	Faded Taupe	X	X	Not Available
983	Dove Grey	X	X	Not Available

Mariak

1" Contractor

1" Professional

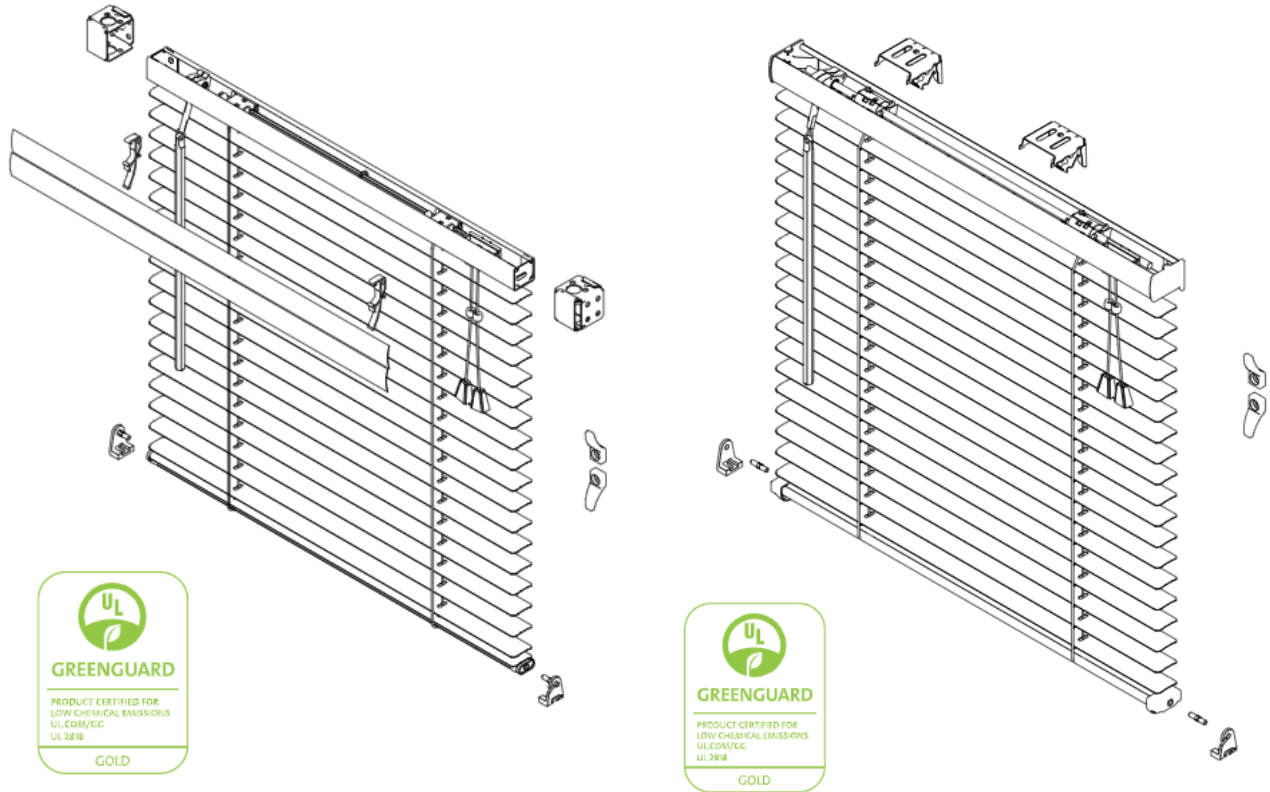

Product Specifications

- Wand Tilt: Standard
- Minimum Width: 9" Center Tilt (no lift)
- Minimum Width: 13" Split Controls
- Blinds between 13" – 18" in width require split controls
- Blinds 11 ½" and less in width require center tilt and no lift controls.
- Blinds between 12" and 18" in width require split controls
- Maximum Width: **120"**
- Minimum Length: 12"
- Maximum Length/Height: **126"**
- ~~Side Channels only available with 1½" headrail~~

Cordless Lift System (Professional Mini Blind only):

- Minimum Size: 18" x 24"
- Maximum Size:
 - Not to exceed 6,400 square inches
 - Maximum Width 96"
 - Maximum Height 84" standard, 72" with Privacy Hidden Holes
- See Pricing for surcharge

Mariak

Product Specifications

Control Location Options:

Standard:	Tilter – Left / Lift Cords – Right
Reverse:	Tilter – Right / Lift Cords – Left
Same Left:	Tilter – Left / Lift Cords – Left
Same Right:	Tilter – Right / Lift Cords – Right

Stacking Height:


<u>Blind Drop</u>	<u>Total Stack Thickness</u>
24"	2 ½"
36"	3"
48"	3 ½"
60"	4"
72"	4 ½"
84"	5"
96"	5 ½"
108"	6"
120"	6 ½"

Wand Selection Chart:

<u>Blind Drop</u>	<u>Wand Length</u>
36" or less	12"
36 ⅛" – 48"	20"
48 ⅛" – 60"	20"
60 ⅛" – 70"	30"
70 ⅛" – 80"	40"
80 ⅛" – 90"	50"
90 ⅛" – 100"	60"
100 1/8" – 120"	72"

Cutouts:

A drawing with the necessary cutout dimensions is required. The maximum cut in width is 5". See Pricing for surcharge

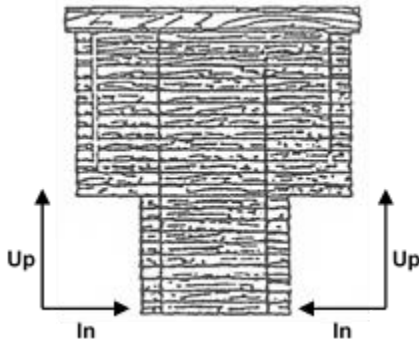

Other Product Options:

- Oversized Blinds (greater than 120" in length or width) – see Pricing for surcharge
- 2-on-1 Headrail Blinds – see Pricing for surcharge
- **NEW Privacy Hidden Hole option for additional light control and privacy - 10% surcharge, Professional blind only**
 - Smaller route holes are located toward the back of the slats, so the route holes disappear when the blind is closed, reducing light gaps.
- ~~Multi-Color Blinds~~ – see Option Pricing for surcharge
- 2 Slat Valance – ~~No Charge option~~ Standard, Contractor blind only

Mariak
575 West Manville Street
Rancho Dominguez, CA 90220
800.562.7425

Item #90-200000-21 (12/2020)